PB84-152404

# Industrial Waste Heat Recovery and the Potential for Emissions Reduction Volume 7. Standard Classification Codes 3-04-002-04 to 3-05-010-03

Energy and Environmental Analysis, Inc.
Arlington, VA

Prepared for

Industrial Environmental Research Lab.-Cincinnati, OH

Feb 84

U.S. Department of Commerce
National Technical Information Service
NTIS

PB84-152404

EPA-600/7-84-020g
February 1984

# INDUSTRIAL WASTE HEAT RECOVERY AND THE POTENTIAL FOR EMISSIONS REDUCTION, VOLUME 7: STANDARD CLASSIFICATION CODES 3-04-002-04 TO 3-05-010-03

by

Energy and Environmental Analysis, Inc.
1111 North 19th Street
Arlington, Virginia 22209

Contract Number 68-03-2622

Project Officer

Benjamin L. Blaney
Power Technology and Conservation Branch
Industrial Environmental Research Laboratory
Cincinnati, Ohio 45268

INDUSTRIAL ENVIRONMENTAL RESEARCH LABORATORY
OFFICE OF RESEARCH AND DEVELOPMENT
U.S. ENVIRONMENTAL PROTECTION AGENCY
CINCINNATI, OHIO 45268

REPRODUCED BY
NATIONAL TECHNICAL
INFORMATION SERVICE
U.S. DEPARTMENT OF COMMERCE
SPRINGFIELD, VA. 22161

**TECHNICAL REPORT DATA**
*(Please read Instructions on the reverse before completing)*

| | | |
|---|---|---|
| 1. REPORT NO. EPA-600/7-84-020g | 2. | 3. RECIPIENT'S ACCESSION NO. PB8 4 15240 |
| 4. TITLE AND SUBTITLE Industrial Waste Heat Recovery and the Potential for Emissions Reduction, Volume 7: Standard Classification Codes 3-04-002-04 to 3-05-010-03 | | 5. REPORT DATE February 1984 |
| | | 6. PERFORMING ORGANIZATION CODE |
| 7. AUTHOR(S) | | 8. PERFORMING ORGANIZATION REPORT NO. |
| 9. PERFORMING ORGANIZATION NAME AND ADDRESS Energy and Environmental Analysis, Inc. 1111 North 19th Street Arlington, VA 22209 | | 10. PROGRAM ELEMENT NO. C2JN1E |
| | | 11. CONTRACT/GRANT NO. 68-03-2622 |
| 12. SPONSORING AGENCY NAME AND ADDRESS Industrial Environmental Research Laboratory U.S. Environmental Protection Agency Cincinnati, Ohio 45268 | | 13. TYPE OF REPORT AND PERIOD COVERED Final: 10/25/77 - 3/28/79 |
| | | 14. SPONSORING AGENCY CODE EPA-ORD/16 |

15. SUPPLEMENTARY NOTES

16. ABSTRACT

This report examines the applicability of conservation equipment to various industrial sectors, determines the net costs involved, and assesses the potential for conservation as a means of air pollution control. Predictions of the amount of waste heat available from U.S. industrial sources were made and a waste heat inventory was established. The inventory is segmented by industrial group, industry, process, and flue gas temperature. The waste heat recovery equipment analysis determined the costs and applications of a variety of waste heat recovery equipment. The analysis examined five major equipment types and their limitations. Cost functions were developed which used furnace flue gas flow rate and temperature, and air preheat temperature as inputs. A discussion of the major factors to be considered for the development of heat recovery equipment also is included. A discussion on the availability and development of high temperature burners and the effects of high preheat temperature on ancillary equipment is included. High preheat temperatures result in higher flame temperatures and correspondingly higher $NO_x$ emissions. This issue also has been addressed in this report. Volume 1 describes study methodology and findings. Volumes 2 through 10 tabulate stack gas waste heat inventories for all the industrial processes studied.

17. KEY WORDS AND DOCUMENT ANALYSIS

| a. DESCRIPTORS | b. IDENTIFIERS/OPEN ENDED TERMS | c. COSATI Field/Group |
|---|---|---|
| | | |

| | | |
|---|---|---|
| 18. DISTRIBUTION STATEMENT Release to Public | 19. SECURITY CLASS (This Report) Unclassified | 21. NO. OF PAGES 572 |
| | 20. SECURITY CLASS (This page) Unclassified | 22. PRICE |

EPA Form 2220-1 (Rev. 4-77) PREVIOUS EDITION IS OBSOLETE

## NOTICE

This document has been reviewed in accordance with U.S. Environmental Protection Agency policy and approved for publication. Mention of trade names or commercial products does not constitute endorsement or recommendation for use.

ABSTRACT

This analysis estimates the environmental consequences of industrial energy conservation. The benefits and problems of using energy conservation equipment depend upon the net costs of using industrial energy conservation technologies and traditional air pollution control techniques. This report examines the applicability of conservation equipment to various industrial sectors, determines the net costs involved, and assesses the potential for conservation as a means of air pollution control.

Predictions of the amount of waste heat available from U.S. industrial sources were made and a waste heat inventory was established. The inventory is segmented by industrial group, industry, process, and flue gas temperature. A description of the theoretical basis for the inventory, the method of execution, the limitations of the analysis, and the results are included.

The waste heat recovery equipment analysis determined the costs and applications of a variety of waste heat recovery equipment. The analysis examined five major equipment types and their limitations. Cost functions were developed which used furnace flue gas flow rate and temperature, and air preheat temperature as inputs.

A discussion of the major factors to be considered for the development of heat recovery equipment also is included. Since a major waste heat recovery technology involves preheating combustion air, a discussion on the availability and development of high temperature burners and the effects of high preheat temperature on ancillary equipment is included. High preheat temperatures result in higher flame temperatures and higher $NO_x$ emissions. This issue also has been addressed in this report.

The above information is presented in Volume 1 of the report, with the exception of the stack gas waste heat inventories for each industrial process. These are tabulated in Volumes 2 through 10 of the report.

This report was submitted in fulfillment of Contract No. 68-03-2622 by Energy and Environmental Analysis, Inc. under sponsorship of the U.S. Environmental Protection Agency. This report covers the period October 25, 1977 to March 28, 1979 and work on this project was completed in October 1981.

## FOREWORD

When energy and material resources are extracted, processed, converted, and used, the related pollutional impacts of our environment and even on our health often require that new and increasingly more efficient pollution control methods be used. The Industrial Environmental Research Laboratory - Cincinnati (IERL-Ci) assists in developing and demonstrating new and improved methodologies that will meet these needs both efficiently and economically.

This report describes the flue gas waste heat recovery potential for various industrial processes and the techniques available for recovering that thermal energy. The potential for emission reduction through waste heat utilization is discussed. This report should be useful to businesses and government agencies concerned with both energy conservation and pollution reduction. Further information on this subject may be obtained from the Energy Pollution Control Division of IERL-Ci.

David G. Stephan
Director
Industrial Environmental Research Laboratory
Cincinnati

CONTENTS

Disclaimer .................................................... ii
Abstract ...................................................... iii
Foreword ...................................................... iv
Contents ...................................................... v
Table ......................................................... vi
1. Introduction ............................................... 1
2. Waste Heat Inventory ....................................... 3

TABLE

1. Division of Stack Gas Waste Heat Inventory into Volumes 2 to 10 of Report ....................................2

# SECTION 1

# INTRODUCTION

## STUDY OBJECTIVES

This study investigated the various applications of energy conservation technologies which recover waste heat from furnaces, boilers, and tubestill heaters. The three main objectives are: (1) to characterize feasible conservation equipment, (2) to determine possible market penetration, and (3) to study pollution formation from waste heat recovery equipment.

The five major components of the study were:

(1) Establishment of a waste heat inventory.

(2) Determination of feasible waste heat recovery technologies.

(3) Determination of factors affecting waste heat recovery and equipment limitations, specifically in furnaces, ovens, and kilns.

(4) Determination of compatibility between conservation equipment and available burner design.

(5) Determination of the effect of waste heat recovery devices on criteria pollutants with an emphasis on $NO_x$ emissions.

The approach to each of these components and the principal results are presented in Volume 1 of the final report. The detailed waste heat inventory which was established as the first task of the study is presented in Volumes 2 to 10.

## STACK GAS WASTE HEAT INVENTORY

One result of establishing a waste heat inventory was the development of computer tables and histograms showing the waste heat contents of stack gasses for different industrial processes. This information is contained in a lengthy set of computer printouts which were bound and published as Volumes 2 to 10 of the project report.

The information is presented by Source Classification Code (SCC), as used in EPA's National Emissions Data System (NEDS). Table 1 shows the industrial process SCC's which are covered in each of the nine volumes.

The material presented in this volume has an asterisk next to it. The title of each SCC is given in Appendix H of Volume 1 of the final report.

TABLE 1. Division of Stack Gas Waste Heat Inventory into Volumes 2 to 10 of Report

| Volume Number | SCC's Covered |
|---|---|
| 2 | 1-01-001-01 to 1-02-007-03 |
| 3 | 1-02-007-04 to 2-03-999-98 |
| 4 | 2-04-001-01 to 3-01-025-05 |
| 5 | 3-01-025-10 to 3-02-013-01 |
| 6 | 3-02-014-01 to 3-04-002-03 |
| * 7 | 3-04-002-04 to 3-05-010-03 |
| 8 | 3-05-010-99 to 3-06-010-01 |
| 9 | 3-06-011-01 to 3-90-005-33 |
| 10 | 3-90-005-99 to 3-90-008-99 |

*Material covered in this volume.

## SECTION 2

## WASTE HEAT INVENTORY

### INTRODUCTION

The waste heat inventory was established to determine the amount of waste heat available from all non-evaporative sources. The flue gas heat loss from these sources was tabulated and then disaggregated by flue gas temperature so that higher temperature sources, which offer the largest savings, could be identified readily.

The waste heat inventory is based on the Environmental Protection Agency's (EPA) National Emission Data System (NEDS) which examines both large and small sources. The NEDS data base provides the best available information on industrial sources in the U.S. and reports stack temperatures and flue gas flow rates. To develop the waste heat inventory, flue gas composition was estimated for flue gases from several fossil fuels at various fuel/air ratios. Using these results and and the NEDS data, functions for Btu's per actual cubic foot of flue gas were developed. From this information, a second set of functions was developed for the maximum, minimum, and expected flue gas waste heat content for each industrial facility. Details on this analysis is presented in Volume 1 of the final report.

In this volume of the report the waste heat inventory of those SCC industrial processes which are indicated by an asterisk in Table 1 are provided.

### INVENTORY DESCRIPTION

The Source Code Classification (SCC) results are ordered numerically. Each SCC is divided into two groups: sources with and without pollution control equipment. If an SCC has entries in only one of the groups, i.e. with or without control equipment, then only that group is shown. The total SCC is presented in the same format.

The top left hand corner of each page of inventory output gives the SCC number and is followed immediately by a brief description of the SCC. The top line indicates whether the information concerns entries with pollution control equipment, without equipment, or the total SCC.

The entry SIC = 0 indicates that the SCC has not been further subdivided by Standard Industrial Classification (SIC). However, if a four-digit

number is given, the output includes the SCC entries also in the four-digit SIC. TOT RECS indicates the total number of records that were processed for the waste heat calculation for that section of the SCC. If SIC does not equal zero, TOT RECS will refer to the number of records in the total SCC, rather than the SIC subdivision of the SCC.

The first calculation results are given by temperature range. The flue gas heat content, given in Btu's, is entered in the appropriate one hundred degree range according to the flue gas exit temperature.* The totals for the six different waste heat levels are given at the bottom of each column. The second page of the printout shows results tabulated by two-digit SIC's. The totals again appear at the bottom of each column. Finally, a histogram of the expected 60°F waste heat calculation is shown. This histogram allows a more comprehensive analysis of the relative significance of the waste heat content of the various flue gases. Each "H" on the histograms represents 1 x $10^{11}$ Btu's and the exact heat value is given in the column directly to the left of the histograms. Any range with a heat value over ten trillion Btu's will extend off the histogram scale and will not be reflected accurately.

*Note: 1 Btu = 1055J and T(°F) = 1.8T(°C) + 32.

SCC= 30400204--BRASS AND BR ELECTRIC INDUCTION F -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 42

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .100E 12 | .942E 11 | .768E 11 | .0 | .0 | .0 |
| 101.- 200. | .581E 12 | .451E 12 | .113E 12 | .0 | .0 | .0 |
| 201.- 300. | .411E 12 | .311E 12 | .163E 12 | .0 | .0 | .0 |
| 301.- 400. | .399E 11 | .306E 11 | .0 | .291E 09 | .276E 09 | .0 |
| 401.- 500. | .457E 11 | .360E 11 | .0 | .515E 10 | .489E 10 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .995E 11 | .839E 11 | .188E 11 | .409E 11 | .390E 11 | .111E 11 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
|  | .128E 13 | .101E 13 | .372E 12 | .464E 11 | .441E 11 | .111E 11 |

SCC = 30400204--BRASS AND BRELECTRIC INDUCTION F -NO CONTROL EQUIPMENT -TOT RECS = 42

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .674E 11 | .507E 11 | .0 | .0 | .0 | .0 |
| 33 | .116E 13 | .913E 12 | .361E 12 | .464E 11 | .441E 11 | .111E 11 |
| 34 | .530E 10 | .475E 10 | .359E 10 | .0 | .0 | .0 |
| 35 | .154E 11 | .139E 11 | .736E 10 | .0 | .0 | .0 |
| 99 | .337E 11 | .253E 11 | .0 | .0 | .0 | .0 |
| | .128E 13 | .101E 13 | .372E 12 | .464E 11 | .441E 11 | .111E 11 |

```
CC = 30400204--BRASS AND BR ELECTRIC INDUCTION F--  -NO CONTROL EQUIPMENT  -SIC=    0 -TOTAL RECS =     42

TEMP RANGE   COUNT
                         ----------------------------------------------------------------------------------------------------
   0.- 100.  .942E 11   !H
 101.- 200.  .451E 12   !HHHH
 201.- 300.  .311E 12   !HHH
 301.- 400.  .306E 11   !H
 401.- 500.  .360E 11   !H
 501.- 600.  .0         !
 601.- 700.  .0         !
 701.- 800.  .0         !
 801.- 900.  .0         !
 901.-1000.  .839E 11   !H
1001.-1100.  .0         !
1101.-1200.  .0         !
1201.-1300.  .0         !
1301.-1400.  .0         !
1401.-1500.  .0         !
1501.-1600.  .0         !
1601.-1700.  .0         !
1701.-1800.  .0         !
1801.-1900.  .0         !
1901.-2000.  .0         !
2001.-2100.  .0         !
2101.-2200.  .0         !
2201.-2300.  .0         !
2301.-2400.  .0         !
2401.-2500.  .0         !
2501.-2600.  .0         !
2601.-2700.  .0         !
2701.-2800.  .0         !
2801.-2900.  .0         !
2901.-3000.  .0         !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400204--BRASS AND BR ELECTRIC INDUCTION F -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 33

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .633E 12 | .594E 12 | .412E 12 | .0 | .0 | .0 |
| 101.- 200. | .342E 12 | .303E 12 | .179E 12 | .0 | .0 | .0 |
| 201.- 300. | .266E 12 | .202E 12 | .106E 12 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .208E 12 | .164E 12 | .987E 11 | .252E 11 | .239E 11 | .219E 11 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .145E 13 | .126E 13 | .796E 12 | .252E 11 | .239E 11 | .219E 11 |

SCC = 30400204--BRASS AND BRELECTRIC INDUCTION F -WITH CONTROL EQUIPMENT -TOT RECS = 33

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .145E 13 | .126E 13 | .796E 12 | .252E 11 | .239E 11 | .219E 11 |
| | .145E 13 | .126E 13 | .796E 12 | .252E 11 | .239E 11 | .219E 11 |

CC =30400204--BRASS AND BR ELECTRIC INDUCTION F---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 33

```
TEMP RANGE   COUNT
                    ----------------------------------------------------------------------------------------------------
    0.- 100.  .594E 12  !HHHHH
  101.- 200.  .303E 12  !HHH
  201.- 300.  .202E 12  !HH
  301.- 400.  .0        !
  401.- 500.  .164E 12  !H
  501.- 600.  .0        !
  601.- 700.  .0        !
  701.- 800.  .0        !
  801.- 900.  .0        !
  901.-1000.  .0        !
 1001.-1100.  .0        !
 1101.-1200.  .0        !
 1201.-1300.  .0        !
 1301.-1400.  .0        !
 1401.-1500.  .0        !
 1501.-1600.  .0        !
 1601.-1700.  .0        !
 1701.-1800.  .0        !
 1801.-1900.  .0        !
 1901.-2000.  .0        !
 2001.-2100.  .0        !
 2101.-2200.  .0        !
 2201.-2300.  .0        !
 2301.-2400.  .0        !
 2401.-2500.  .0        !
 2501.-2600.  .0        !
 2601.-2700.  .0        !
 2701.-2800.  .0        !
 2801.-2900.  .0        !
 2901.-3000.  .0        !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400204--BRASS AND BR ELECTRIC INDUCTION F -TOTAL SCC -SIC = 0 -TOT RECS = 75

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .734E 12 | .688E 12 | .489E 12 | .0 | .0 | .0 |
| 101.- 200. | .923E 12 | .755E 12 | .292E 12 | .0 | .0 | .0 |
| 201.- 300. | .678E 12 | .513E 12 | .269E 12 | .0 | .0 | .0 |
| 301.- 400. | .399E 11 | .306E 11 | .0 | .0 | .0 | .0 |
| 401.- 500. | .254E 12 | .200E 12 | .0 | .291E 09 | .276E 09 | .0 |
| 501.- 600. | .0 | .0 | .987E 11 | .303E 11 | .288E 11 | .219E 11 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .995E 11 | .839E 11 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .188E 11 | .409E 11 | .390E 11 | .111E 11 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .273E 13 | .227E 13 | .117E 13 | .716E 11 | .681E 11 | .330E 11 |

SCC = 30400204--BRASS AND BRELECTRIC INDUCTION F -TOTAL SCC -TOT RECS = 75

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .674E 11 | .507E 11 | .0 | .0 | .0 | .0 |
| 33 | .261E 13 | .218E 13 | .116E 13 | .716E 11 | .681E 11 | .330E 11 |
| 34 | .530E 10 | .475E 10 | .359E 10 | .0 | .0 | .0 |
| 35 | .154E 11 | .139E 11 | .736E 10 | .0 | .0 | .0 |
| 99 | .337E 11 | .253E 11 | .0 | .0 | .0 | .0 |
| | .273E 13 | .227E 13 | .117E 13 | .716E 11 | .681E 11 | .330E 11 |

CC 30400204--BRASS AND BR ELECTRIC INDUCTION F--TOTAL SCC -SIC = 0 -TOT RECS = 75

```
EMP RANGE    COUNT

                         ------------------------------------------------------------------------------------------------------
    0.- 100.  .688E 12  !HHHHHH
  101.- 200.  .755E 12  !HHHHHHH
  201.- 300.  .513E 12  !HHHHH
  301.- 400.  .306E 11  !H
  401.- 500.  .200E 12  !HH
  501.- 600.  .0        !
  601.- 700.  .0        !
  701.- 800.  .0        !
  801.- 900.  .0        !
  901.-1000.  .839E 11  !H
 1001.-1100.  .0        !
 1101.-1200.  .0        !
 1201.-1300.  .0        !
 1301.-1400.  .0        !
 1401.-1500.  .0        !
 1501.-1600.  .0        !
 1601.-1700.  .0        !
 1701.-1800.  .0        !
 1801.-1900.  .0        !
 1901.-2000.  .0        !
 2001.-2100.  .0        !
 2101.-2200.  .0        !
 2201.-2300.  .0        !
 2301.-2400.  .0        !
 2401.-2500.  .0        !
 2501.-2600.  .0        !
 2601.-2700.  .0        !
 2701.-2800.  .0        !
 2801.-2900.  .0        !
 2901.-3000.  .0        !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400205--BRASS AND BR REVERBERATORY FURNAC -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 26

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .446E 09 | .418E 09 | .0 | .0 | .0 | .0 |
| 101.- 200. | .470E 10 | .351E 10 | .174E 10 | .0 | .0 | .0 |
| 201.- 300. | .594E 11 | .452E 11 | .780E 10 | .0 | .0 | .0 |
| 301.- 400. | .159E 11 | .124E 11 | .0 | .118E 10 | .112E 10 | .0 |
| 401.- 500. | .554E 10 | .436E 10 | .0 | .624E 09 | .593E 09 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .128E 11 | .107E 11 | .758E 10 | .489E 10 | .466E 10 | .425E 10 |
| 901.-1000. | .828E 10 | .698E 10 | .0 | .341E 10 | .324E 10 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .115E 11 | .100E 11 | .0 | .666E 10 | .632E 10 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .129E 11 | .113E 11 | .0 | .804E 10 | .763E 10 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .654E 10 | .581E 10 | .466E 10 | .446E 10 | .414E 10 | .363E 10 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .233E 11 | .207E 11 | .167E 11 | .169E 11 | .152E 11 | .146E 11 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .120E 11 | .108E 11 | .878E 10 | .960E 10 | .828E 10 | .898E 10 |
| | .173E 12 | .142E 12 | .473E 11 | .558E 11 | .512E 11 | .315E 11 |

SCC = 30400205--BRASS AND BRREVERBERATORY FURNAC -NO CONTROL EQUIPMENT -TOT RECS = 26

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .125E 12 | .100E 12 | .142E 11 | .244E 11 | .230E 11 | .363E 10 |
| 91 | .248E 11 | .215E 11 | .164E 11 | .145E 11 | .129E 11 | .132E 11 |
| 97 | .233E 11 | .207E 11 | .167E 11 | .169E 11 | .152E 11 | .146E 11 |
| | .173E 12 | .142E 12 | .473E 11 | .558E 11 | .512E 11 | .315E 11 |

CC = 30400205--BRASS AND BR REVERBERATORY FURNAC-- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 26

| TEMP RANGE | COUNT | |
|---|---|---|
| 0.- 100. | .418E 09 | ! |
| 01.- 200. | .351E 10 | !H |
| 201.- 300. | .452E 11 | !H |
| 301.- 400. | .124E 11 | !H |
| 401.- 500. | .436E 10 | !H |
| 501.- 600. | .0 | ! |
| 601.- 700. | .0 | ! |
| 701.- 800. | .0 | ! |
| 801.- 900. | .107E 11 | !H |
| 901.-1000. | .698E 10 | !H |
| 1001.-1100. | .0 | ! |
| 1101.-1200. | .0 | ! |
| 1201.-1300. | .0 | ! |
| 1301.-1400. | .0 | ! |
| 1401.-1500. | .0 | ! |
| 1501.-1600. | .100E 11 | !H |
| 1601.-1700. | .0 | ! |
| 1701.-1800. | .0 | ! |
| 1801.-1900. | .113E 11 | !H |
| 1901.-2000. | .0 | ! |
| 2001.-2100. | .0 | ! |
| 2101.-2200. | .581E 10 | !H |
| 2201.-2300. | .0 | ! |
| 2301.-2400. | .0 | ! |
| 2401.-2500. | .207E 11 | !H |
| 2501.-2600. | .0 | ! |
| 2601.-2700. | .0 | ! |
| 2701.-2800. | .0 | ! |
| 2801.-2900. | .0 | ! |
| 2901.-3000. | .108E 11 | !H |

0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100

SCC= 30400205--BRASS AND BR REVERBERATORY FURNAC -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 19

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .451E 12 | .339E 12 | .166E 12 | .0 | .0 | .0 |
| 201.- 300. | .113E 13 | .852E 12 | .108E 12 | .0 | .0 | .0 |
| 301.- 400. | .745E 11 | .581E 11 | .338E 11 | .554E 10 | .526E 10 | .481E 10 |
| 401.- 500. | .117E 12 | .922E 11 | .555E 11 | .141E 11 | .134E 11 | .122E 11 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .385E 11 | .324E 11 | .232E 11 | .156E 11 | .148E 11 | .135E 11 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .181E 13 | .137E 13 | .386E 12 | .352E 11 | .334E 11 | .306E 11 |

SCC = 30400205--BRASS AND BRREVERBERATORY FURNAC -WITH CONTROL EQUIPMENT -TOT RECS = 19

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .173E 13 | .132E 13 | .358E 12 | .352E 11 | .334E 11 | .306E 11 |
| 99 | .780E 11 | .586E 11 | .288E 11 | .0 | .0 | .0 |
| | .181E 13 | .137E 13 | .386E 12 | .352E 11 | .334E 11 | .306E 11 |

CC =30400205--BRASS AND BR REVERBERATORY FURNAC---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 19

```
TEMP RANGE   COUNT

                       ---------------------------------------------------------------------------------------------------
   0.- 100.   .0        !
 101.- 200.   .339E 12  !HHH
 201.- 300.   .852E 12  !HHHHHHHH
 301.- 400.   .581E 11  !H
 401.- 500.   .922E 11  !H
 501.- 600.   .0        !
 601.- 700.   .0        !
 701.- 800.   .0        !
 801.- 900.   .0        !
 901.-1000.   .324E 11  !H
1001.-1100.   .0        !
1101.-1200.   .0        !
1201.-1300.   .0        !
1301.-1400.   .0        !
1401.-1500.   .0        !
1501.-1600.   .0        !
1601.-1700.   .0        !
1701.-1800.   .0        !
1801.-1900.   .0        !
1901.-2000.   .0        !
2001.-2100.   .0        !
2101.-2200.   .0        !
2201.-2300.   .0        !
2301.-2400.   .0        !
2401.-2500.   .0        !
2501.-2600.   .0        !
2601.-2700.   .0        !
2701.-2800.   .0        !
2801.-2900.   .0        !
2901.-3000.   .0        !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400205--BRASS AND BR REVERBERATORY FURNAC -TOTAL SCC -SIC = 0 -TOT RECS = 45

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .446E 09 | .418E 09 | .0 | .0 | .0 | .0 |
| 101.- 200. | .456E 12 | .342E 12 | .168E 12 | .0 | .0 | .0 |
| 201.- 300. | .118E 13 | .897E 12 | .115E 12 | .0 | 0 | .0 |
| 301.- 400. | .904E 11 | .705E 11 | .338E 11 | .671E 10 | .638E 10 | .481E 10 |
| 401.- 500. | .122E 12 | .966E 11 | .555E 11 | .147E 11 | .140E 11 | .122E 11 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .128E 11 | .107E 11 | .758E 10 | .489E 10 | .466E 10 | .425E 10 |
| 901.-1000. | .468E 11 | .394E 11 | .232E 11 | .190E 11 | .181E 11 | .135E 11 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .115E 11 | .100E 11 | .0 | .666E 10 | .632E 10 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .129E 11 | .113E 11 | .0 | .804E 10 | .763E 10 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .654E 10 | .581E 10 | .466E 10 | .446E 10 | .414E 10 | .363E 10 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .233E 11 | .207E 11 | .167E 11 | .169E 11 | .152E 11 | .146E 11 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .120E 11 | .108E 11 | .878E 10 | .960E 10 | .828E 10 | .898E 10 |
| | .198E 13 | .152E 13 | .434E 12 | .910E 11 | .846E 11 | .621E 11 |

SCC = 30400205--BRASS AND BRREVERBERATORY FURNAC -TOTAL SCC -TOT RECS = 45

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .185E 13 | .142E 13 | .372E 12 | .596E 11 | .565E 11 | .342E 11 |
| 91 | .248E 11 | .215E 11 | .164E 11 | .145E 11 | .129E 11 | .132E 11 |
| 97 | .233E 11 | .207E 11 | .167E 11 | .169E 11 | .152E 11 | .146E 11 |
| 99 | .780E 11 | .586E 11 | .288E 11 | .0 | .0 | .0 |
| | .198E 13 | .152E 13 | .434E 12 | .910E 11 | .846E 11 | .621E 11 |

CC 30400205--BRASS AND BR REVERBERATORY FURNAC--TOTAL SCC -SIC = 0 -TOT RECS = 45

```
EMP RANGE    COUNT
                      ---------------------------------------------------------------------------------------------------
   0.- 100.  .418E 09  !
 101.- 200.  .342E 12  !HHH
 201.- 300.  .897E 12  !HHHHHHHH
 301.- 400.  .705E 11  !H
 401.- 500.  .966E 11  !H
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .107E 11  !H
 901.-1000.  .394E 11  !H
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .100E 11  !H
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .113E 11  !H
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .581E 10  !H
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .207E 11  !H
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .108E 11  !H
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400206--BRASS AND BR ROTARY FURNACE -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 12

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .151E 12 | .115E 12 | .165E 11 | .0 | .0 | .0 |
| 301.- 400. | .332E 11 | .255E 11 | .697E 09 | .345E 09 | .328E 09 | .991E 08 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .184E 12 | .140E 12 | .172E 11 | .345E 09 | .328E 09 | .991E 08 |

SCC = 30400206--BRASS AND BRROTARY FURNACE -NO CONTROL EQUIPMENT -TOT RECS = 12

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .168E 12 | .128E 12 | .172E 11 | .345E 09 | .328E 09 | .991E 08 |
| 97 | .157E 11 | .120E 11 | .0 | .0 | .0 | .0 |
| | .184E 12 | .140E 12 | .172E 11 | .345E 09 | .328E 09 | .991E 08 |

CC = 30400206--BRASS AND BR ROTARY FURNACE -- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 12

| TEMP RANGE | COUNT | |
|---|---|---|
| 0.- 100. | .0 | ! |
| 101.- 200. | .0 | ! |
| 201.- 300. | .115E 12 | !H |
| 301.- 400. | .255E 11 | !H |
| 401.- 500. | .0 | ! |
| 501.- 600. | .0 | ! |
| 601.- 700. | .0 | ! |
| 701.- 800. | .0 | ! |
| 801.- 900. | .0 | ! |
| 901.-1000. | .0 | ! |
| 1001.-1100. | .0 | ! |
| 1101.-1200. | .0 | ! |
| 1201.-1300. | .0 | ! |
| 1301.-1400. | .0 | ! |
| 1401.-1500. | .0 | ! |
| 1501.-1600. | .0 | ! |
| 1601.-1700. | .0 | ! |
| 1701.-1800. | .0 | ! |
| 1801.-1900. | .0 | ! |
| 1901.-2000. | .0 | ! |
| 2001.-2100. | .0 | ! |
| 2101.-2200. | .0 | ! |
| 2201.-2300. | .0 | ! |
| 2301.-2400. | .0 | ! |
| 2401.-2500. | .0 | ! |
| 2501.-2600. | .0 | ! |
| 2601.-2700. | .0 | ! |
| 2701.-2800. | .0 | ! |
| 2801.-2900. | .0 | ! |
| 2901.-3000. | .0 | ! |

0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100

SCC= 30400206--BRASS AND BR ROTARY FURNACE -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 15

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .486E 12 | .363E 12 | .742E 11 | .0 | .0 | .0 |
| 201.- 300. | .376E 12 | .288E 12 | .123E 12 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .863E 12 | .651E 12 | .197E 12 | .0 | .0 | .0 |

```
SCC = 30400206--BRASS AND BRROTARY FURNACE       -WITH CONTROL EQUIPMENT -TOT RECS =    15

SIC          MAXIMUM    EXPECTED   MINIMUM    MAXIMUM    EXPECTED    MINIMUM
              60 DEG     60 DEG     60 DEG      300DEG   300 DEG     300 DEG
   33        .760E 12   .574E 12   .159E 12   .0         .0          .0
   99        .103E 12   .770E 11   .382E 11   .0         .0          .0

             .863E 12   .651E 12   .197E 12   .0         .0          .0


CC =30400206--BRASS AND BR ROTARY FURNACE      ---WITH CONTROL EQUIPMENT  -SIC=    0 -TOTAL RECS =     15

TEMP RANGE   COUNT
                        -----------------------------------------------------------------------------------------------------
   0.- 100.   .0        !
 101.- 200.   .363E 12  !HHH
 201.- 300.   .288E 12  !HH
 301.- 400.   .0        !
 401.- 500.   .0        !
 501.- 600.   .0        !
 601.- 700.   .0        !
 701.- 800.   .0        !
 801.- 900.   .0        !
 901.-1000.   .0        !
1001.-1100.   .0        !
1101.-1200.   .0        !
1201.-1300.   .0        !
1301.-1400.   .0        !
1401.-1500.   .0        !
1501.-1600.   .0        !
1601.-1700.   .0        !
1701.-1800.   .0        !
1801.-1900.   .0        !
1901.-2000.   .0        !
2001.-2100.   .0        !
2101.-2200.   .0        !
2201.-2300.   .0        !
2301.-2400.   .0        !
2401.-2500.   .0        !
2501.-2600.   .0        !
2601.-2700.   .0        !
2701.-2800.   .0        !
2801.-2900.   .0        !
2901.-3000.   .0        !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400206--BRASS AND BR ROTARY FURNACE -TOTAL SCC -SIC = 0 -TOT RECS = 27

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .486E 12 | .363E 12 | .742E 11 | .0 | .0 | .0 |
| 201.- 300. | .527E 12 | .402E 12 | .139E 12 | .0 | .0 | .0 |
| 301.- 400. | .332E 11 | .255E 11 | .697E 09 | .345E 09 | .328E 09 | .991E 08 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .105E 13 | .791E 12 | .214E 12 | .345E 09 | .328E 09 | .991E 08 |

SCC = 30400206--BRASS AND BRROTARY FURNACE -TOTAL SCC -TOT RECS = 27

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .928E 12 | .702E 12 | .176E 12 | .345E 09 | .328E 09 | .991E 08 |
| 97 | .157E 11 | .120E 11 | .0 | .0 | .0 | .0 |
| 99 | .103E 12 | .770E 11 | .382E 11 | .0 | .0 | .0 |
| | .105E 13 | .791E 12 | .214E 12 | .345E 09 | .328E 09 | .991E 08 |

CC 30400206--BRASS AND BR ROTARY FURNACE --TOTAL SCC -SIC = 0 -TOT RECS = 27

```
EMP RANGE   COUNT
                       ----------------------------------------------------------------------------------------------------
   0.- 100.  .0        !
 101.- 200.  .363E 12  !HHH
 201.- 300.  .402E 12  !HHHH
 301.- 400.  .255E 11  !H
 401.- 500.  .0        !
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400299--BRASS AND BR OTHER/NOT CLASSIFIED -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 27

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .328E 11 | .307E 11 | .167E 11 | .0 | .0 | .0 |
| 101.- 200. | .391E 12 | .303E 12 | .397E 11 | .0 | .0 | .0 |
| 201.- 300. | .707E 11 | .541E 11 | .498E 10 | .0 | .0 | .0 |
| 301.- 400. | .627E 11 | .485E 11 | .581E 09 | .235E 10 | .223E 10 | .826E 08 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .823E 11 | .674E 11 | .0 | .232E 11 | .220E 11 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .279E 10 | .239E 10 | .176E 10 | .132E 10 | .125E 10 | .114E 10 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .642E 12 | .506E 12 | .638E 11 | .269E 11 | .255E 11 | .122E 10 |

SCC = 30400299--BRASS AND BROTHER/NOT CLASSIFIED -NO CONTROL EQUIPMENT -TOT RECS = 27

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .443E 12 | .348E 12 | .507E 11 | .367E 10 | .349E 10 | .122E 10 |
| 34 | .985E 11 | .826E 11 | .124E 11 | .232E 11 | .220E 11 | .0 |
| 35 | .996E 11 | .748E 11 | .0 | .0 | .0 | .0 |
| 91 | .917E 09 | .860E 09 | .701E 09 | .0 | .0 | .0 |
| | .642E 12 | .506E 12 | .638E 11 | .269E 11 | .255E 11 | .122E 10 |

CC = 30400299--BRASS AND BR OTHER/NOT CLASSIFIED-- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 27

```
TEMP RANGE   COUNT
                   ------------------------------------------------------------------------------------------------------
   0.- 100.  .307E 11  !H
 101.- 200.  .303E 12  !HHH
 201.- 300.  .541E 11  !H
 301.- 400.  .485E 11  !H
 401.- 500.  .0        !
 501.- 600.  .0        !
 601.- 700.  .674E 11  !H
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .239E 10  !H
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400299--BRASS AND BR OTHER/NOT CLASSIFIED -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 48

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .362E 12 | .340E 12 | .183E 12 | .0 | .0 | .0 |
| 101.- 200. | .808E 12 | .622E 12 | .314E 12 | .0 | .0 | .0 |
| 201.- 300. | .707E 11 | .538E 11 | .289E 11 | .0 | .0 | .0 |
| 301.- 400. | .895E 11 | .689E 11 | .382E 11 | .131E 10 | .124E 10 | .114E 10 |
| 401.- 500. | .547E 11 | .430E 11 | .256E 11 | .574E 10 | .545E 10 | .499E 10 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .138E 13 | .113E 13 | .590E 12 | .705E 10 | .669E 10 | .612E 10 |

SCC = 30400299--BRASS AND BROTHER/NOT CLASSIFIED -WITH CONTROL EQUIPMENT -TOT RECS = 48

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .210E 11 | .197E 11 | .0 | .0 | .0 | .0 |
| 33 | .127E 13 | .103E 13 | .557E 12 | .131E 10 | .124E 10 | .114E 10 |
| 34 | .208E 11 | .195E 11 | .697E 10 | .0 | .0 | .0 |
| 37 | .210E 11 | .197E 11 | .0 | .0 | .0 | .0 |
| 99 | .548E 11 | .431E 11 | .256E 11 | .574E 10 | .545E 10 | .499E 10 |
| | .138E 13 | .113E 13 | .590E 12 | .705E 10 | .669E 10 | .612E 10 |

CC =30400299--BRASS AND BR OTHER/NOT CLASSIFIED---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 48

```
TEMP RANGE   CCUNT

                           ----------------------------------------------------------------------------------------------------
   0.- 100.  .340E 12   !HHH
 101.- 200.  .622E 12   !HHHHHH
 201.- 300.  .538E 11   !H
 301.- 400.  .689E 11   !H
 401.- 500.  .430E 11   !H
 501.- 600.  .0         !
 601.- 700.  .0         !
 701.- 800.  .0         !
 801.- 900.  .0         !
 901.-1000.  .0         !
1001.-1100.  .0         !
1101.-1200.  .0         !
1201.-1300.  .0         !
1301.-1400.  .0         !
1401.-1500.  .0         !
1501.-1600.  .0         !
1601.-1700.  .0         !
1701.-1800.  .0         !
1801.-1900.  .0         !
1901.-2000.  .0         !
2001.-2100.  .0         !
2101.-2200.  .0         !
2201.-2300.  .0         !
2301.-2400.  .0         !
2401.-2500.  .0         !
2501.-2600.  .0         !
2601.-2700.  .0         !
2701.-2800.  .0         !
2801.-2900.  .0         !
2901.-3000.  .0         !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400299--BRASS AND BR OTHER/NOT CLASSIFIED -TOTAL SCC -SIC = 0 -TOT RECS = 75

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .395E 12 | .371E 12 | .199E 12 | .0 | .0 | .0 |
| 101.- 200. | .120E 13 | .925E 12 | .354E 12 | .0 | .0 | .0 |
| 201.- 300. | .141E 12 | .108E 12 | .339E 11 | .0 | .0 | .0 |
| 301.- 400. | .152E 12 | .117E 12 | .388E 11 | .366E 10 | .348E 10 | .122E 10 |
| 401.- 500. | .547E 11 | .430E 11 | .256E 11 | .574E 10 | .545E 10 | .499E 10 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .823E 11 | .674E 11 | .0 | .232E 11 | .220E 11 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .279E 10 | .239E 10 | .176E 10 | .132E 10 | .125E 10 | .114E 10 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .203E 13 | .163E 13 | .653E 12 | .339E 11 | .322E 11 | .735E 10 |

SCC = 30400299--BRASS AND BROTHER/NOT CLASSIFIED -TOTAL SCC -TOT RECS = 75

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .210E 11 | .197E 11 | .0 | .0 | .0 | .0 |
| 33 | .171E 13 | .137E 13 | .608E 12 | .498E 10 | .473E 10 | .236E 10 |
| 34 | .119E 12 | .102E 12 | .193E 11 | .232E 11 | .220E 11 | .0 |
| 35 | .996E 11 | .748E 11 | .0 | .0 | .0 | .0 |
| 37 | .210E 11 | .197E 11 | .0 | .0 | .0 | .0 |
| 91 | .917E 09 | .860E 09 | .701E 09 | .0 | .0 | .0 |
| 99 | .548E 11 | .431E 11 | .256E 11 | .574E 10 | .545E 10 | .499E 10 |
| | .203E 13 | .163E 13 | .653E 12 | .339E 11 | .322E 11 | .735E 10 |

CC 30400299--BRASS AND BR OTHER/NOT CLASSIFIED--TOTAL SCC -SIC = 0 -TOT RECS = 75

```
EMP RANGE    COUNT
                     ----------------------------------------------------------------------------------------------------
   0.- 100.  .371E 12  !HHH
 101.- 200.  .925E 12  !HHHHHHHHH
 201.- 300.  .108E 12  !H
 301.- 400.  .117E 12  !H
 401.- 500.  .430E 11  !H
 501.- 600.  .0        !
 601.- 700.  .674E 11  !H
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .239E 10  !H
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                     0--------10--------20--------30--------40--------50--------60--------70--------80--------90--------100
```

SCC= 30400301--GRAY IRON CUPOLA FURNACE -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 305

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .645E 11 | .605E 11 | .458E 11 | .0 | .0 | .0 |
| 101.- 200. | .812E 12 | .636E 12 | .299E 12 | .0 | .0 | .0 |
| 201.- 300. | .276E 12 | .210E 12 | .233E 11 | .0 | .0 | .0 |
| 301.- 400. | .519E 12 | .405E 12 | .185E 12 | .366E 11 | .347E 11 | .247E 11 |
| 401.- 500. | .563E 12 | .444E 12 | .228E 12 | .669E 11 | .635E 11 | .476E 11 |
| 501.- 600. | .115E 11 | .929E 10 | .602E 10 | .267E 10 | .254E 10 | .232E 10 |
| 601.- 700. | .261E 12 | .213E 12 | .141E 12 | .687E 11 | .653E 11 | .597E 11 |
| 701.- 800. | .300E 12 | .248E 12 | .314E 11 | .973E 11 | .925E 11 | .159E 11 |
| 801.- 900. | .106E 12 | .886E 11 | .310E 11 | .399E 11 | .380E 11 | .171E 11 |
| 901.-1000. | .435E 12 | .366E 12 | .909E 11 | .178E 12 | .169E 12 | .530E 11 |
| 1001.-1100. | .263E 12 | .223E 12 | .125E 12 | .116E 12 | .110E 12 | .774E 11 |
| 1101.-1200. | .661E 13 | .564E 13 | .126E 12 | .311E 13 | .296E 13 | .811E 11 |
| 1201.-1300. | .782E 11 | .672E 11 | .503E 11 | .392E 11 | .373E 11 | .339E 11 |
| 1301.-1400. | .353E 12 | .304E 12 | .136E 12 | .183E 12 | .174E 12 | .931E 11 |
| 1401.-1500. | .314E 12 | .273E 12 | .160E 12 | .176E 12 | .168E 12 | .116E 12 |
| 1501.-1600. | .241E 12 | .210E 12 | .578E 11 | .139E 12 | .132E 12 | .418E 11 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .307E 12 | .270E 12 | .212E 12 | .189E 12 | .179E 12 | .152E 12 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .595E 12 | .527E 12 | .354E 12 | .387E 12 | .367E 12 | .253E 12 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .120E 12 | .107E 12 | .856E 11 | .820E 11 | .760E 11 | .668E 11 |
| 2201.-2300. | .314E 11 | .280E 11 | .224E 11 | .219E 11 | .201E 11 | .182E 11 |
| 2301.-2400. | .271E 12 | .241E 12 | .331E 11 | .193E 12 | .175E 12 | .280E 11 |
| 2401.-2500. | .811E 10 | .723E 10 | .583E 10 | .589E 10 | .530E 10 | .510E 10 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .125E 14 | .106E 14 | .245E 13 | .513E 13 | .487E 13 | .119E 13 |

SCC = 30400301--GRAY IRON CUPOLA FURNACE -NO CONTROL EQUIPMENT -TOT RECS = 305

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .640E 11 | .547E 11 | .0 | .302E 11 | .287E 11 | .0 |
| 33 | .116E 14 | .983E 13 | .226E 13 | .488E 13 | .463E 13 | .115E 13 |
| 34 | .386E 12 | .311E 12 | .117E 12 | .795E 11 | .756E 11 | .166E 11 |
| 35 | .223E 12 | .184E 12 | .208E 11 | .745E 11 | .708E 11 | .122E 11 |
| 36 | .417E 10 | .353E 10 | .255E 10 | .178E 10 | .169E 10 | .154E 10 |
| 37 | .174E 12 | .140E 12 | .494E 11 | .371E 11 | .353E 11 | .602E 10 |
| 99 | .645E 11 | .551E 11 | .356E 09 | .302E 11 | .287E 11 | .0 |
| | .125E 14 | .106E 14 | .245E 13 | .513E 13 | .487E 13 | .119E 13 |

CC = 30400301--GRAY IRON CUPOLA FURNACE -- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 305

```
TEMP RANGE   COUNT
                      -----------------------------------------------------------------------------------------------------
   0.- 100.  .605E 11 !H
 101.- 200.  .636E 12 !HHHHHH
 201.- 300.  .210E 12 !HH
 301.- 400.  .405E 12 !HHHH
 401.- 500.  .444E 12 !HHHH
 501.- 600.  .929E 10 !H
 601.- 700.  .213E 12 !HH
 701.- 800.  .248E 12 !HH
 801.- 900.  .886E 11 !H
 901.-1000.  .366E 12 !HHH
1001.-1100.  .223E 12 !HH
1101.-1200.  .564E 13 !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
1201.-1300.  .672E 11 !H
1301.-1400.  .304E 12 !HHH
1401.-1500.  .273E 12 !HH
1501.-1600.  .210E 12 !HH
1601.-1700.  .0       !
1701.-1800.  .270E 12 !HH
1801.-1900.  .0       !
1901.-2000.  .527E 12 !HHHHH
2001.-2100.  .0       !
2101.-2200.  .107E 12 !H
2201.-2300.  .280E 11 !H
2301.-2400.  .241E 12 !HH
2401.-2500.  .723E 10 !H
2501.-2600.  .0       !
2601.-2700.  .0       !
2701.-2800.  .0       !
2801.-2900.  .0       !
2901.-3000.  .0       !
                      0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400301--GRAY IRON    CUPOLA FURNACE        -WITH CONTROL EQUIPMENT -SIC =    0 -TOT RECS =    356

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .810E 11 | .760E 11 | .306E 11 | .0 | .0 | .0 |
| 101.- 200. | .695E 13 | .541E 13 | .265E 13 | .0 | .0 | .0 |
| 201.- 300. | .682E 13 | .517E 13 | .542E 12 | .0 | .0 | .0 |
| 301.- 400. | .227E 13 | .176E 13 | .917E 12 | .118E 12 | .112E 12 | .899E 11 |
| 401.- 500. | .370E 13 | .293E 13 | .147E 13 | .518E 12 | .492E 12 | .365E 12 |
| 501.- 600. | .456E 12 | .368E 12 | .175E 12 | .982E 11 | .932E 11 | .619E 11 |
| 601.- 700. | .129E 12 | .106E 12 | .225E 10 | .362E 11 | .344E 11 | .883E 09 |
| 701.- 800. | .603E 11 | .498E 11 | .340E 11 | .191E 11 | .182E 11 | .166E 11 |
| 801.- 900. | .941E 09 | .784E 09 | .546E 09 | .335E 09 | .319E 09 | .292E 09 |
| 901.-1000. | .418E 11 | .351E 11 | .251E 11 | .167E 11 | .159E 11 | .145E 11 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .167E 13 | .143E 13 | .945E 12 | .788E 12 | .750E 12 | .612E 12 |
| 1201.-1300. | .172E 10 | .148E 10 | .110E 10 | .856E 09 | .814E 09 | .740E 09 |
| 1301.-1400. | .310E 11 | .268E 11 | .203E 11 | .165E 11 | .157E 11 | .142E 11 |
| 1401.-1500. | .262E 12 | .228E 12 | .436E 11 | .145E 12 | .137E 12 | .316E 11 |
| 1501.-1600. | .489E 12 | .427E 12 | .187E 12 | .284E 12 | .270E 12 | .135E 12 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .780E 12 | .686E 12 | .557E 11 | .480E 12 | .456E 12 | .400E 11 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .266E 12 | .235E 12 | .188E 12 | .173E 12 | .164E 12 | .134E 12 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .240E 14 | .189E 14 | .730E 13 | .269E 13 | .256E 13 | .152E 13 |

SCC = 30400301--GRAY IRON   CUPOLA FURNACE   -WITH CONTROL EQUIPMENT -TOT RECS =   356

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 20 | .841E 11 | .637E 11 | .0 | .0 | .0 | .0 |
| 32 | .102E 12 | .783E 11 | .588E 10 | .397E 09 | .377E 09 | .345E 09 |
| 33 | .218E 14 | .172E 14 | .650E 13 | .258E 13 | .245E 13 | .142E 13 |
| 34 | .864E 12 | .667E 12 | .339E 12 | .493E 11 | .468E 11 | .428E 11 |
| 35 | .205E 12 | .159E 12 | .503E 11 | .421E 10 | .399E 10 | .343E 10 |
| 37 | .730E 12 | .607E 12 | .332E 12 | .533E 11 | .506E 11 | .463E 11 |
| 38 | .160E 12 | .120E 12 | .589E 11 | .0 | .0 | .0 |
| 99 | .128E 11 | .105E 11 | .711E 10 | .383E 10 | .365E 10 | .333E 10 |
| | .240E 14 | .189E 14 | .730E 13 | .269E 13 | .256E 13 | .152E 13 |

CC =30400301--GRAY IRON   CUPOLA FURNACE   ---WITH CONTROL EQUIPMENT  -SIC=   0 -TOTAL RECS =   356

```
TEMP RANGE    COUNT
                      ----------------------------------------------------------------------------------------------------
   0.- 100.  .760E 11 !H
 101.- 200.  .541E 13 !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 201.- 300.  .517E 13 !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 301.- 400.  .176E 13 !HHHHHHHHHHHHHHHHH
 401.- 500.  .293E 13 !HHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 501.- 600.  .368E 12 !HHH
 601.- 700.  .106E 12 !H
 701.- 800.  .498E 11 !H
 801.- 900.  .784E 09 !
 901.-1000.  .351E 11 !H
1001.-1100.  .0       !
1101.-1200.  .143E 13 !HHHHHHHHHHHHHH
1201.-1300.  .148E 10 !H
1301.-1400.  .268E 11 !H
1401.-1500.  .228E 12 !HH
1501.-1600.  .427E 12 !HHHH
1601.-1700.  .0       !
1701.-1800.  .686E 12 !HHHHHH
1801.-1900.  .0       !
1901.-2000.  .235E 12 !HH
2001.-2100.  .0       !
2101.-2200.  .0       !
2201.-2300.  .0       !
2301.-2400.  .0       !
2401.-2500.  .0       !
2501.-2600.  .0       !
2601.-2700.  .0       !
2701.-2800.  .0       !
2801.-2900.  .0       !
2901.-3000.  .0       !
                      0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400301--GRAY IRON CUPOLA FURNACE -TOTAL SCC -SIC = 0 -TOT RECS = 661

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .146E 12 | .136E 12 | .764E 11 | .0 | .0 | .0 |
| 101.- 200. | .776E 13 | .604E 13 | .295E 13 | .0 | .0 | .0 |
| 201.- 300. | .709E 13 | .538E 13 | .565E 12 | .0 | .0 | .0 |
| 301.- 400. | .278E 13 | .216E 13 | .110E 13 | .155E 12 | .147E 12 | .115E 12 |
| 401.- 500. | .426E 13 | .338E 13 | .170E 13 | .585E 12 | .555E 12 | .413E 12 |
| 501.- 600. | .468E 12 | .377E 12 | .181E 12 | .101E 12 | .957E 11 | .642E 11 |
| 601.- 700. | .391E 12 | .319E 12 | .143E 12 | .105E 12 | .997E 11 | .606E 11 |
| 701.- 800. | .361E 12 | .298E 12 | .654E 11 | .116E 12 | .111E 12 | .325E 11 |
| 801.- 900. | .107E 12 | .894E 11 | .316E 11 | .402E 11 | .383E 11 | .173E 11 |
| 901.-1000. | .476E 12 | .401E 12 | .116E 12 | .195E 12 | .185E 12 | .675E 11 |
| 1001.-1100. | .263E 12 | .223E 12 | .125E 12 | .116E 12 | .110E 12 | .774E 11 |
| 1101.-1200. | .828E 13 | .707E 13 | .107E 13 | .390E 13 | .371E 13 | .693E 12 |
| 1201.-1300. | .800E 11 | .687E 11 | .514E 11 | .401E 11 | .381E 11 | .347E 11 |
| 1301.-1400. | .384E 12 | .331E 12 | .157E 12 | .200E 12 | .190E 12 | .107E 12 |
| 1401.-1500. | .577E 12 | .501E 12 | .204E 12 | .321E 12 | .305E 12 | .148E 12 |
| 1501.-1600. | .730E 12 | .637E 12 | .245E 12 | .423E 12 | .402E 12 | .177E 12 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .109E 13 | .956E 12 | .268E 12 | .669E 12 | .635E 12 | .192E 12 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .861E 12 | .762E 12 | .542E 12 | .560E 12 | .531E 12 | .386E 12 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .120E 12 | .107E 12 | .856E 11 | .820E 11 | .760E 11 | .668E 11 |
| 2201.-2300. | .314E 11 | .280E 11 | .224E 11 | .219E 11 | .201E 11 | .182E 11 |
| 2301.-2400. | .271E 12 | .241E 12 | .331E 11 | .193E 12 | .175E 12 | .280E 11 |
| 2401.-2500. | .811E 10 | .723E 10 | .583E 10 | .589E 10 | .530E 10 | .510E 10 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
|  | .365E 14 | .295E 14 | .975E 13 | .783E 13 | .743E 13 | .270E 13 |

SCC = 30400301--GRAY IRON    CUPOLA FURNACE        -TOTAL SCC -TOT RECS =    661

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 20 | .841E 11 | .637E 11 | .0 | .0 | .0 | .0 |
| 32 | .166E 12 | .133E 12 | .588E 10 | .306E 11 | .291E 11 | .345E 09 |
| 33 | .335E 14 | .271E 14 | .876E 13 | .746E 13 | .708E 13 | .257E 13 |
| 34 | .125E 13 | .977E 12 | .456E 12 | .129E 12 | .122E 12 | .594E 11 |
| 35 | .429E 12 | .343E 12 | .711E 11 | .787E 11 | .748E 11 | .156E 11 |
| 36 | .417E 10 | .353E 10 | .255E 10 | .178E 10 | .169E 10 | .154E 10 |
| 37 | .904E 12 | .747E 12 | .382E 12 | .904E 11 | .859E 11 | .523E 11 |
| 38 | .160E 12 | .120E 12 | .589E 11 | .0 | .0 | .0 |
| 99 | .773E 11 | .657E 11 | .747E 10 | .340E 11 | .324E 11 | .333E 10 |
| | .365E 14 | .295E 14 | .975E 13 | .783E 13 | .743E 13 | .270E 13 |

CC 30400301--GRAY IRON    CUPOLA FURNACE      --TOTAL SCC  -SIC =    0 -TOT RECS =    661

```
EMP RANGE    COUNT

                         ----------------------------------------------------------------------------------------------------
   0.- 100.  .136E 12   !H
 101.- 200.  .604E 13   !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 201.- 300.  .538E 13   !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 301.- 400.  .216E 13   !HHHHHHHHHHHHHHHHHHHHHH
 401.- 500.  .338E 13   !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 501.- 600.  .377E 12   !HHH
 601.- 700.  .319E 12   !HHH
 701.- 800.  .298E 12   !HH
 801.- 900.  .894E 11   !H
 901.-1000.  .401E 12   !HHHH
1001.-1100.  .223E 12   !HH
1101.-1200.  .707E 13   !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
1201.-1300.  .687E 11   !H
1301.-1400.  .331E 12   !HHH
1401.-1500.  .501E 12   !HHHHH
1501.-1600.  .637E 12   !HHHHHHH
1601.-1700.  .0         !
1701.-1800.  .956E 12   !HHHHHHHHHH
1801.-1900.  .0         !
1901.-2000.  .762E 12   !HHHHHHHH
2001.-2100.  .0         !
2101.-2200.  .107E 12   !H
2201.-2300.  .280E 11   !H
2301.-2400.  .241E 12   !HH
2401.-2500.  .723E 10   !H
2501.-2600.  .0         !
2601.-2700.  .0         !
2701.-2800.  .0         !
2801.-2900.  .0         !
2901.-3000.  .0         !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400302--GRAY IRON REVERBERATORY FURNAC -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 37

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .490E 10 | .460E 10 | .0 | .0 | .0 | .0 |
| 101.- 200. | .329E 10 | .247E 10 | .121E 10 | .0 | .0 | .0 |
| 201.- 300. | .112E 12 | .848E 11 | .367E 11 | .0 | .0 | .0 |
| 301.- 400. | .214E 11 | .167E 11 | .0 | .159E 10 | .151E 10 | .0 |
| 401.- 500. | .234E 11 | .186E 11 | .0 | .355E 10 | .337E 10 | .0 |
| 501.- 600. | .609E 11 | .493E 11 | .320E 11 | .142E 11 | .135E 11 | .123E 11 |
| 601.- 700. | .449E 12 | .366E 12 | .151E 11 | .117E 12 | .111E 12 | .676E 10 |
| 701.- 800. | .126E 11 | .104E 11 | .715E 10 | .413E 10 | .393E 10 | .359E 10 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .351E 11 | .297E 11 | .0 | .152E 11 | .145E 11 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .441E 11 | .384E 11 | .0 | .248E 11 | .236E 11 | .0 |
| 1501.-1600. | .934E 09 | .815E 09 | .632E 09 | .542E 09 | .515E 09 | .457E 09 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .767E 12 | .622E 12 | .928E 11 | .181E 12 | .172E 12 | .231E 11 |

SCC = 30400302--GRAY IRON   REVERBERATORY FURNAC -NO CONTROL EQUIPMENT -TOT RECS =   37

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .525E 11 | .428E 11 | .0 | .135E 11 | .128E 11 | .0 |
| 33 | .593E 12 | .482E 12 | .620E 11 | .142E 12 | .135E 12 | .227E 11 |
| 35 | .441E 11 | .384E 11 | .0 | .248E 11 | .236E 11 | .0 |
| 36 | .761E 11 | .576E 11 | .302E 11 | .0 | .0 | .0 |
| 99 | .934E 09 | .815E 09 | .632E 09 | .542E 09 | .515E 09 | .457E 09 |
| | .767E 12 | .622E 12 | .928E 11 | .181E 12 | .172E 12 | .231E 11 |

CC = 30400302--GRAY IRON   REVERBERATORY FURNAC--  -NO CONTROL EQUIPMENT  -SIC=   0 -TOTAL RECS =   37

```
TEMP RANGE    COUNT
                      ------------------------------------------------------------------------------------------------
   0.- 100.  .460E 10  !H
 101.- 200.  .247E 10  !H
 201.- 300.  .848E 11  !H
 301.- 400.  .167E 11  !H
 401.- 500.  .186E 11  !H
 501.- 600.  .493E 11  !H
 601.- 700.  .366E 12  !HHH
 701.- 800.  .104E 11  !H
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .297E 11  !H
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .384E 11  !H
1501.-1600.  .815E 09  !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400302--GRAY IRON REVERBERATORY FURNAC -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 5

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .714E 10 | .670E 10 | .0 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .146E 12 | .113E 12 | .179E 11 | .685E 10 | .651E 10 | .255E 10 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .128E 12 | .109E 12 | .808E 11 | .604E 11 | .574E 11 | .523E 11 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .281E 12 | .229E 12 | .987E 11 | .672E 11 | .639E 11 | .548E 11 |

SCC = 30400302--GRAY IRON   REVERBERATORY FURNAC -WITH CONTROL EQUIPMENT -TOT RECS =     5

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .242E 12 | .199E 12 | .808E 11 | .643E 11 | .611E 11 | .523E 11 |
| 34 | .395E 11 | .308E 11 | .179E 11 | .293E 10 | .279E 10 | .255E 10 |
| | .281E 12 | .229E 12 | .987E 11 | .672E 11 | .639E 11 | .548E 11 |

CC =30400302--GRAY IRON    REVERBERATORY FURNAC---WITH CONTROL EQUIPMENT  -SIC=    0 -TCTAL RECS =      5

```
TEMP RANGE    COUNT

                        ----------------------------------------------------------------------------------------------------
   0.- 100.   .670E 10  !H
 101.- 200.   .0        !
 201.- 300.   .0        !
 301.- 400.   .113E 12  !H
 401.- 500.   .0        !
 501.- 600.   .0        !
 601.- 700.   .0        !
 701.- 800.   .0        !
 801.- 900.   .0        !
 901.-1000.   .0        !
1001.-1100.   .0        !
1101.-1200.   .109E 12  !H
1201.-1300.   .0        !
1301.-1400.   .0        !
1401.-1500.   .0        !
1501.-1600.   .0        !
1601.-1700.   .0        !
1701.-1800.   .0        !
1801.-1900.   .0        !
1901.-2000.   .0        !
2001.-2100.   .0        !
2101.-2200.   .0        !
2201.-2300.   .0        !
2301.-2400.   .0        !
2401.-2500.   .0        !
2501.-2600.   .0        !
2601.-2700.   .0        !
2701.-2800.   .0        !
2801.-2900.   .0        !
2901.-3000.   .0        !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400302--GRAY IRON    REVERBERATORY FURNAC -TOTAL SCC -SIC =    0 -TOT RECS =    42

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .120E 11 | .113E 11 | .0 | .0 | .0 | .0 |
| 101.- 200. | .329E 10 | .247E 10 | .121E 10 | .0 | .0 | .0 |
| 201.- 300. | .112E 12 | .848E 11 | .367E 11 | .0 | .0 | .0 |
| 301.- 400. | .168E 12 | .130E 12 | .179E 11 | .844E 10 | .802E 10 | .255E 10 |
| 401.- 500. | .234E 11 | .186E 11 | .0 | .355E 10 | .337E 10 | .0 |
| 501.- 600. | .609E 11 | .493E 11 | .320E 11 | .142E 11 | .135E 11 | .123E 11 |
| 601.- 700. | .449E 12 | .366E 12 | .151E 11 | .117E 12 | .111E 12 | .676E 10 |
| 701.- 800. | .126E 11 | .104E 11 | .715E 10 | .413E 10 | .393E 10 | .359E 10 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .351E 11 | .297E 11 | .0 | .152E 11 | .145E 11 | .0 |
| 1101.-1200. | .128E 12 | .109E 12 | .808E 11 | .604E 11 | .574E 11 | .523E 11 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .441E 11 | .384E 11 | .0 | .248E 11 | .236E 11 | .0 |
| 1501.-1600. | .934E 09 | .815E 09 | .632E 09 | .542E 09 | .515E 09 | .457E 09 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .105E 13 | .851E 12 | .192E 12 | .248E 12 | .236E 12 | .779E 11 |

SCC = 30400302--GRAY IRON REVERBERATORY FURNAC -TOTAL SCC -TOT RECS = 42

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .525E 11 | .428E 11 | .0 | .135E 11 | .128E 11 | .0 |
| 33 | .835E 12 | .681E 12 | .143E 12 | .206E 12 | .196E 12 | .749E 11 |
| 34 | .395E 11 | .308E 11 | .179E 11 | .293E 10 | .279E 10 | .255E 10 |
| 35 | .441E 11 | .384E 11 | .0 | .248E 11 | .236E 11 | .0 |
| 36 | .761E 11 | .576E 11 | .302E 11 | .0 | .0 | .0 |
| 99 | .934E 09 | .815E 09 | .632E 09 | .542E 09 | .515E 09 | .457E 09 |
| | .105E 13 | .851E 12 | .192E 12 | .248E 12 | .236E 12 | .779E 11 |

CC 30400302--GRAY IRON REVERBERATORY FURNAC--TOTAL SCC -SIC = 0 -TOT RECS = 42

```
EMP RANGE    COUNT
                    ------------------------------------------------------------------------------------------
   0.- 100.  .113E 11  !H
 101.- 200.  .247E 10  !H
 201.- 300.  .848E 11  !H
 301.- 400.  .130E 12  !H
 401.- 500.  .186E 11  !H
 501.- 600.  .493E 11  !H
 601.- 700.  .366E 12  !HHH
 701.- 800.  .104E 11  !H
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .297E 11  !H
1101.-1200.  .109E 12  !H
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .384E 11  !H
1501.-1600.  .815E 09  !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400303--GRAY IRON ELECTRIC INDUCTION F -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 119

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .662E 13 | .621E 13 | .534E 12 | .0 | .0 | .0 |
| 101.- 200. | .136E 13 | .110E 13 | .385E 12 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .823E 12 | .639E 12 | .119E 12 | .410E 11 | .389E 11 | .884E 10 |
| 401.- 500. | .306E 12 | .243E 12 | .149E 12 | .445E 11 | .423E 11 | .387E 11 |
| 501.- 600. | .0 | .0 | .C | .0 | .0 | .0 |
| 601.- 700. | .103E 11 | .838E 10 | .554E 10 | .272E 10 | .259E 10 | .237E 10 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .178E 11 | .149E 11 | .105E 11 | .668E 10 | .636E 10 | .581E 10 |
| 901.-1000. | .483E 12 | .407E 12 | .254E 11 | .199E 12 | .189E 12 | .150E 11 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .498E 12 | .425E 12 | .0 | .235E 12 | .223E 12 | .0 |
| 1201.-1300. | .128E 12 | .109E 12 | .810E 11 | .614E 11 | .584E 11 | .531E 11 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .147E 13 | .130E 13 | .519E 12 | .954E 12 | .905E 12 | .370E 12 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .197E 13 | .176E 13 | .0 | .149E 13 | .132E 13 | .0 |
| 2701.-2800. | .175E 10 | .157E 10 | .127E 10 | .135E 10 | .118E 10 | .123E 10 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .137E 14 | .122E 14 | .183E 13 | .304E 13 | .278E 13 | .495E 12 |

SCC = 30400303--GRAY IRON   ELECTRIC INDUCTION F -NO CONTROL EQUIPMENT -TOT RECS =   119

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .113E 14 | .100E 14 | .166E 13 | .225E 13 | .208E 13 | .457E 12 |
| 34 | .504E 12 | .472E 12 | .770E 09 | .0 | .0 | .0 |
| 35 | .132E 13 | .120E 13 | .231E 11 | .746E 12 | .659E 12 | .0 |
| 36 | .100E 12 | .941E 11 | .0 | .0 | .0 | .0 |
| 53 | .100E 12 | .941E 11 | .0 | .0 | .0 | .0 |
| 97 | .100E 12 | .941E 11 | .0 | .0 | .0 | .0 |
| 99 | .306E 12 | .243E 12 | .149E 12 | .445E 11 | .423E 11 | .387E 11 |
| | .137E 14 | .122E 14 | .183E 13 | .304E 13 | .278E 13 | .495E 12 |

CC = 30400303--GRAY IRON   ELECTRIC INDUCTION F--  -NO CONTROL EQUIPMENT  -SIC=   0 -TOTAL RECS =   119

```
TEMP RANGE   COUNT

                       ----------------------------------------------------------------------------------------------------
   0.- 100.  .621E 13  !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 101.- 200.  .110E 13  !HHHHHHHHHHH
 201.- 300.  .0        !
 301.- 400.  .639E 12  !HHHHHH
 401.- 500.  .243E 12  !HH
 501.- 600.  .0        !
 601.- 700.  .838E 10  !H
 701.- 800.  .0        !
 801.- 900.  .149E 11  !H
 901.-1000.  .407E 12  !HHHH
1001.-1100.  .0        !
1101.-1200.  .425E 12  !HHHH
1201.-1300.  .109E 12  !H
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .130E 13  !HHHHHHHHHHHHH
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .176E 13  !HHHHHHHHHHHHHHHHH
2701.-2800.  .157E 10  !H
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400303--GRAY IRON    ELECTRIC INDUCTION F  -WITH CONTROL EQUIPMENT -SIC =    ) -TOT RECS =    57

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .382E 12 | .358E 12 | .242E 12 | .0 | .0 | .0 |
| 101.- 200. | .106E 14 | .810E 13 | .772E 12 | .0 | .0 | .0 |
| 201.- 300. | .146E 12 | .110E 12 | .581E 11 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .464E 10 | .369E 10 | .227E 10 | .705E 09 | .669E 09 | .612E 09 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .718E 12 | .588E 12 | .393E 12 | .202E 12 | .192E 12 | .176E 12 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .937E 09 | .785E 09 | .555E 09 | .358E 09 | .341E 09 | .311E 09 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .119E 14 | .916E 13 | .147E 13 | .203E 12 | .193E 12 | .177E 12 |

SCC = 30400303--GRAY IRON   ELECTRIC INDUCTION F -WITH CONTROL EQUIPMENT -TOT RECS =   57

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .113E 14 | .870E 13 | .136E 13 | .203E 12 | .193E 12 | .177E 12 |
| 34 | .382E 11 | .287E 11 | .146E 11 | .0 | .0 | .0 |
| 36 | .171E 11 | .161E 11 | .131E 11 | .0 | .0 | .0 |
| 37 | .555E 12 | .418E 12 | .764E 11 | .0 | .0 | .0 |
| | .119E 14 | .916E 13 | .147E 13 | .203E 12 | .193E 12 | .177E 12 |

CC =30400303--GRAY IRON   ELECTRIC INDUCTION F---WITH CONTROL EQUIPMENT  -SIC=   0 -TOTAL RECS =   57

```
TEMP RANGE   COUNT

                          ----------------------------------------------------------------------------------------------------
   0.- 100.   .358E 12   !HHH
 101.- 200.   .810E 13   !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 201.- 300.   .110E 12   !H
 301.- 400.   .0         !
 401.- 500.   .369E 10   !H
 501.- 600.   .0         !
 601.- 700.   .588E 12   !HHHHH
 701.- 800.   .0         !
 801.- 900.   .785E 09   !
 901.-1000.   .0         !
1001.-1100.   .0         !
1101.-1200.   .0         !
1201.-1300.   .0         !
1301.-1400.   .0         !
1401.-1500.   .0         !
1501.-1600.   .0         !
1601.-1700.   .0         !
1701.-1800.   .0         !
1801.-1900.   .0         !
1901.-2000.   .0         !
2001.-2100.   .0         !
2101.-2200.   .0         !
2201.-2300.   .0         !
2301.-2400.   .0         !
2401.-2500.   .0         !
2501.-2600.   .0         !
2601.-2700.   .0         !
2701.-2800.   .0         !
2801.-2900.   .0         !
2901.-3000.   .0         !
                         0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400303--GRAY IRON ELECTRIC INDUCTION F -TOTAL SCC -SIC = 0 -TOT RECS = 176

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .700E 13 | .657E 13 | .776E 12 | .0 | .0 | .0 |
| 101.- 200. | .120E 14 | .920E 13 | .116E 13 | .0 | .0 | .0 |
| 201.- 300. | .146E 12 | .110E 12 | .581E 11 | .0 | .0 | .0 |
| 301.- 400. | .823E 12 | .639E 12 | .119E 12 | .410E 11 | .389E 11 | .884E 10 |
| 401.- 500. | .310E 12 | .246E 12 | .151E 12 | .452E 11 | .429E 11 | .393E 11 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .728E 12 | .596E 12 | .398E 12 | .205E 12 | .195E 12 | .178E 12 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .188E 11 | .157E 11 | .111E 11 | .704E 10 | .670E 10 | .612E 10 |
| 901.-1000. | .483E 12 | .407E 12 | .254E 11 | .199E 12 | .189E 12 | .150E 11 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .498E 12 | .425E 12 | .0 | .235E 12 | .223E 12 | .0 |
| 1201.-1300. | .128E 12 | .109E 12 | .810E 11 | .614E 11 | .584E 11 | .531E 11 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .147E 13 | .130E 13 | .519E 12 | .954E 12 | .905E 12 | .370E 12 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .197E 13 | .176E 13 | .0 | .149E 13 | .132E 13 | .0 |
| 2701.-2800. | .175E 10 | .157E 10 | .127E 10 | .135E 10 | .118E 10 | .123E 10 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .256E 14 | .214E 14 | .330E 13 | .324E 13 | .298E 13 | .672E 12 |

SCC = 30400303--GRAY IRON   ELECTRIC INDUCTION F -TOTAL SCC -TOT RECS =   176

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .225E 14 | .187E 14 | .302E 13 | .245E 13 | .228E 13 | .633E 12 |
| 34 | .542E 12 | .501E 12 | .154E 11 | .0 | .0 | .0 |
| 35 | .132E 13 | .120E 13 | .231E 11 | .746E 12 | .659E 12 | .0 |
| 36 | .117E 12 | .110E 12 | .131E 11 | .0 | .0 | .0 |
| 37 | .555E 12 | .418E 12 | .764E 11 | .0 | .0 | .0 |
| 53 | .100E 12 | .941E 11 | .0 | .0 | .0 | .0 |
| 97 | .100E 12 | .941E 11 | .0 | .0 | .0 | .0 |
| 99 | .306E 12 | .243E 12 | .149E 12 | .445E 11 | .423E 11 | .387E 11 |
| | .256E 14 | .214E 14 | .330E 13 | .324E 13 | .298E 13 | .672E 12 |

CC 30400303--GRAY IRON   ELECTRIC INDUCTION F--TOTAL SCC  -SIC =   0 -TOT RECS =   176

```
EMP RANGE     COUNT
                       ----------------------------------------------------------------------------------------------------
    0.- 100.  .657E 13 !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
  101.- 200.  .920E 13 !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
  201.- 300.  .110E 12 !H
  301.- 400.  .639E 12 !HHHHHH
  401.- 500.  .246E 12 !HH
  501.- 600.  .0       !
  601.- 700.  .596E 12 !HHHHH
  701.- 800.  .0       !
  801.- 900.  .157E 11 !H
  901.-1000.  .407E 12 !HHHH
 1001.-1100.  .0       !
 1101.-1200.  .425E 12 !HHHH
 1201.-1300.  .109E 12 !H
 1301.-1400.  .0       !
 1401.-1500.  .0       !
 1501.-1600.  .0       !
 1601.-1700.  .0       !
 1701.-1800.  .0       !
 1801.-1900.  .0       !
 1901.-2000.  .130E 13 !HHHHHHHHHHHH
 2001.-2100.  .0       !
 2101.-2200.  .0       !
 2201.-2300.  .0       !
 2301.-2400.  .0       !
 2401.-2500.  .0       !
 2501.-2600.  .0       !
 2601.-2700.  .176E 13 !HHHHHHHHHHHHHHHHH
 2701.-2800.  .157E 10 !H
 2801.-2900.  .0       !
 2901.-3000.  .0       !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400305--GRAY IRON ANNEALING OPERATION -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 17

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .845E 11 | .638E 11 | .214E 10 | .0 | .0 | .0 |
| 201.- 300. | .755E 10 | .572E 10 | .299E 10 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .239E 12 | .190E 12 | .275E 11 | .362E 11 | .344E 11 | .743E 10 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .116E 12 | .982E 11 | .722E 10 | .479E 11 | .456E 11 | .426E 10 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .961E 10 | .820E 10 | .606E 10 | .453E 10 | .431E 10 | .392E 10 |
| 1201.-1300. | .164E 11 | .141E 11 | .106E 11 | .825E 10 | .784E 10 | .713E 10 |
| 1301.-1400. | .656E 11 | .567E 11 | .0 | .349E 11 | .331E 11 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .539E 12 | .436E 12 | .565E 11 | .132E 12 | .125E 12 | .227E 11 |

SCC = 30400305--GRAY IRON ANNEALING OPERATION -NO CONTROL EQUIPMENT -TOT RECS = 17

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .365E 11 | .290E 11 | .0 | .554E 10 | .526E 10 | .0 |
| 33 | .349E 12 | .289E 12 | .196E 11 | .113E 12 | .107E 12 | .111E 11 |
| 34 | .563E 11 | .448E 11 | .275E 11 | .855E 10 | .812E 10 | .743E 10 |
| 36 | .162E 11 | .141E 11 | .936E 10 | .491E 10 | .468E 10 | .426E 10 |
| 37 | .802E 11 | .598E 11 | .0 | .0 | .0 | .0 |
| | .539E 12 | .436E 12 | .565E 11 | .132E 12 | .125E 12 | .227E 11 |

CC = 30400305--GRAY IRON ANNEALING OPERATION -- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 17

```
TEMP RANGE   COUNT
                      ------------------------------------------------------------------------------------------------
   0.- 100.   .0       !
 101.- 200.   .638E 11 !H
 201.- 300.   .572E 10 !H
 301.- 400.   .0       !
 401.- 500.   .190E 12 !H
 501.- 600.   .0       !
 601.- 700.   .0       !
 701.- 800.   .0       !
 801.- 900.   .0       !
 901.-1000.   .982E 11 !H
1001.-1100.   .0       !
1101.-1200.   .820E 10 !H
1201.-1300.   .141E 11 !H
1301.-1400.   .567E 11 !H
1401.-1500.   .0       !
1501.-1600.   .0       !
1601.-1700.   .0       !
1701.-1800.   .0       !
1801.-1900.   .0       !
1901.-2000.   .0       !
2001.-2100.   .0       !
2101.-2200.   .0       !
2201.-2300.   .0       !
2301.-2400.   .0       !
2401.-2500.   .0       !
2501.-2600.   .0       !
2601.-2700.   .0       !
2701.-2800.   .0       !
2801.-2900.   .0       !
2901.-3000.   .0       !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400305--GRAY IRON ANNEALING OPERATION -WITH CONTROL EQUIPMENT -SIC = J -TOT RECS = 3

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .259E 11 | .243E 11 | .0 | .0 | .0 | .0 |
| 101.- 200. | .147E 11 | .138E 11 | .996E 10 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .407E 11 | .381E 11 | .996E 10 | .0 | .0 | .0 |

SCC = 30400305--GRAY IRON ANNEALING OPERATION -WITH CONTROL EQUIPMENT -TOT RECS = 3

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .407E 11 | .381E 11 | .996E 10 | .0 | .0 | .0 |
| | .407E 11 | .381E 11 | .996E 10 | .0 | .0 | .0 |

CC =30400305--GRAY IRON ANNEALING OPERATION ---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 3

| TEMP RANGE | COUNT | |
|---|---|---|
| 0.- 100. | .243E 11 | !H |
| 101.- 200. | .138E 11 | !H |
| 201.- 300. | .0 | ! |
| 301.- 400. | .0 | ! |
| 401.- 500. | .0 | ! |
| 501.- 600. | .0 | ! |
| 601.- 700. | .0 | ! |
| 701.- 800. | .0 | ! |
| 801.- 900. | .0 | ! |
| 901.-1000. | .0 | ! |
| 1001.-1100. | .0 | ! |
| 1101.-1200. | .0 | ! |
| 1201.-1300. | .0 | ! |
| 1301.-1400. | .0 | ! |
| 1401.-1500. | .0 | ! |
| 1501.-1600. | .0 | ! |
| 1601.-1700. | .0 | ! |
| 1701.-1800. | .0 | ! |
| 1801.-1900. | .0 | ! |
| 1901.-2000. | .0 | ! |
| 2001.-2100. | .0 | ! |
| 2101.-2200. | .0 | ! |
| 2201.-2300. | .0 | ! |
| 2301.-2400. | .0 | ! |
| 2401.-2500. | .0 | ! |
| 2501.-2600. | .0 | ! |
| 2601.-2700. | .0 | ! |
| 2701.-2800. | .0 | ! |
| 2801.-2900. | .0 | ! |
| 2901.-3000. | .0 | ! |

0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100

SCC= 30400305--GRAY IRON ANNEALING OPERATION -TOTAL SCC -SIC = 0 -TOT RECS = 20

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .259E 11 | .243E 11 | .0 | .0 | .0 | .0 |
| 101.- 200. | .992E 11 | .776E 11 | .121E 11 | .0 | .0 | .0 |
| 201.- 300. | .755E 10 | .572E 10 | .299E 10 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .239E 12 | .190E 12 | .275E 11 | .362E 11 | .344E 11 | .743E 10 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .116E 12 | .982E 11 | .722E 10 | .479E 11 | .456E 11 | .426E 10 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .961E 10 | .820E 10 | .606E 10 | .453E 10 | .431E 10 | .392E 10 |
| 1201.-1300. | .164E 11 | .141E 11 | .106E 11 | .825E 10 | .784E 10 | .713E 10 |
| 1301.-1400. | .656E 11 | .567E 11 | .0 | .349E 11 | .331E 11 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .579E 12 | .474E 12 | .665E 11 | .132E 12 | .125E 12 | .227E 11 |

SCC = 30400305--GRAY IRON   ANNEALING OPERATION  -TOTAL SCC -TOT RECS =   20

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .365E 11 | .290E 11 | .0 | .554E 10 | .526E 10 | .0 |
| 33 | .390E 12 | .327E 12 | .296E 11 | .113E 12 | .107E 12 | .111E 11 |
| 34 | .563E 11 | .448E 11 | .275E 11 | .855E 10 | .812E 10 | .743E 10 |
| 36 | .162E 11 | .141E 11 | .936E 10 | .491E 10 | .468E 10 | .426E 10 |
| 37 | .802E 11 | .598E 11 | .0 | .0 | .0 | .0 |
| | .579E 12 | .474E 12 | .665E 11 | 132E 12 | .125E 12 | .227E 11 |

CC 30400305--GRAY IRON   ANNEALING OPERATION --TOTAL SCC  -SIC =   0 -TOT RECS =   20

```
EMP RANGE   COUNT

    0.- 100.  .243E 11  !H
  101.- 200.  .776E 11  !H
  201.- 300.  .572E 10  !H
  301.- 400.  .0        !
  401.- 500.  .190E 12  !H
  501.- 600.  .0        !
  601.- 700.  .0        !
  701.- 800.  .0        !
  801.- 900.  .0        !
  901.-1000.  .982E 11  !H
 1001.-1100.  .0        !
 1101.-1200.  .820E 10  !H
 1201.-1300.  .141E 11  !H
 1301.-1400.  .567E 11  !H
 1401.-1500.  .0        !
 1501.-1600.  .0        !
 1601.-1700.  .0        !
 1701.-1800.  .0        !
 1801.-1900.  .0        !
 1901.-2000.  .0        !
 2001.-2100.  .0        !
 2101.-2200.  .0        !
 2201.-2300.  .0        !
 2301.-2400.  .0        !
 2401.-2500.  .0        !
 2501.-2600.  .0        !
 2601.-2700.  .0        !
 2701.-2800.  .0        !
 2801.-2900.  .0        !
 2901.-3000.  .0        !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400330--GRAY IRON    MISCELLANEOUS CASTIN -NO CONTROL EQUIPMENT -SIC =    0  -TOT RECS =    27

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .317E 12 | .297E 12 | .152E 12 | .0 | .0 | .0 |
| 101.- 200. | .111E 12 | .830E 11 | .774E 10 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .196E 12 | .167E 12 | .0 | .924E 11 | .879E 11 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .218E 12 | .189E 12 | .0 | .116E 12 | .110E 12 | .0 |
| 1401.-1500. | .150E 10 | .131E 10 | .101E 10 | .846E 09 | .804E 09 | .730E 09 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .251E 09 | .220E 09 | .172E 09 | .150E 09 | .142E 09 | .124E 09 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .947E 12 | .841E 12 | .0 | .646E 12 | .599E 12 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .179E 13 | .158E 13 | .160E 12 | .855E 12 | .798E 12 | .854E 09 |

SCC = 30400330--GRAY IRON MISCELLANEOUS CASTIN -NO CONTROL EQUIPMENT -TOT RECS = 27

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .157E 13 | .139E 13 | .143E 12 | .763E 12 | .710E 12 | .854E 09 |
| 35 | .208E 12 | .179E 12 | .871E 10 | .924E 11 | .879E 11 | .0 |
| 99 | .109E 11 | .102E 11 | .829E 10 | .0 | .0 | .0 |
| | .179E 13 | .158E 13 | .160E 12 | .855E 12 | .798E 12 | .854E 09 |

CC = 30400330--GRAY IRON MISCELLANEOUS CASTIN-- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 27

```
TEMP RANGE   COUNT
                      ----------------------------------------------------------------------------------------------------
   0.- 100.  .297E 12 !HH
 101.- 200.  .830E 11 !H
 201.- 300.  .0       !
 301.- 400.  .0       !
 401.- 500.  .0       !
 501.- 600.  .0       !
 601.- 700.  .0       !
 701.- 800.  .0       !
 801.- 900.  .0       !
 901.-1000.  .0       !
1001.-1100.  .0       !
1101.-1200.  .167E 12 !H
1201.-1300.  .0       !
1301.-1400.  .189E 12 !H
1401.-1500.  .131E 10 !H
1501.-1600.  .0       !
1601.-1700.  .220E 09 !
1701.-1800.  .0       !
1801.-1900.  .0       !
1901.-2000.  .0       !
2001.-2100.  .0       !
2101.-2200.  .841E 12 !HHHHHHHH
2201.-2300.  .0       !
2301.-2400.  .0       !
2401.-2500.  .0       !
2501.-2600.  .0       !
2601.-2700.  .0       !
2701.-2800.  .0       !
2801.-2900.  .0       !
2901.-3000.  .0       !
                      0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400330--GRAY IRON    MISCELLANEOUS CASTIN  -WITH CONTROL EQUIPMENT -SIC =    0 -TOT RECS =    102

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .291E 13 | .273E 13 | .205E 13 | .0 | .0 | .0 |
| 101.- 200. | .780E 12 | .614E 12 | .332E 12 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .150E 12 | .116E 12 | .656E 11 | .551E 10 | .523E 10 | .479E 10 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .384E 13 | .346E 13 | .245E 13 | .551E 10 | .523E 10 | .479E 10 |

SCC = 30400330--GRAY IRON MISCELLANEOUS CASTIN -WITH CONTROL EQUIPMENT -TOT RECS = 102

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 30 | .779E 10 | .731E 10 | .596E 10 | .0 | .0 | .0 |
| 33 | .351E 13 | .315E 13 | .223E 13 | .551E 10 | .523E 10 | .479E 10 |
| 34 | .539E 11 | .506E 11 | .412E 11 | .0 | .0 | .0 |
| 35 | .488E 11 | .458E 11 | .778E 10 | .0 | .0 | .0 |
| 99 | .221E 12 | .207E 12 | .169E 12 | .0 | .0 | .0 |
| | .384E 13 | .346E 13 | .245E 13 | .551E 10 | .523E 10 | .479E 10 |

CC =30400330--GRAY IRON MISCELLANEOUS CASTIN---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 102

```
TEMP RANGE   COUNT
                     ------------------------------------------------------------------------------------------------------
   0.- 100.  .273E 13 !HHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 101.- 200.  .614E 12 !HHHHHHH
 201.- 300.  .0       !
 301.- 400.  .116E 12 !H
 401.- 500.  .0       !
 501.- 600.  .0       !
 601.- 700.  .0       !
 701.- 800.  .0       !
 801.- 900.  .0       !
 901.-1000.  .0       !
1001.-1100.  .0       !
1101.-1200.  .0       !
1201.-1300.  .0       !
1301.-1400.  .0       !
1401.-1500.  .0       !
1501.-1600.  .0       !
1601.-1700.  .0       !
1701.-1800.  .0       !
1801.-1900.  .0       !
1901.-2000.  .0       !
2001.-2100.  .0       !
2101.-2200.  .0       !
2201.-2300.  .0       !
2301.-2400.  .0       !
2401.-2500.  .0       !
2501.-2600.  .0       !
2601.-2700.  .0       !
2701.-2800.  .0       !
2801.-2900.  .0       !
2901.-3000.  .0       !
                      0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400330--GRAY IRON MISCELLANEOUS CASTIN -TOTAL SCC -SIC = 0 -TOT RECS = 129

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .323E 13 | .303E 13 | .220E 13 | .0 | .0 | .0 |
| 101.- 200. | .890E 12 | .697E 12 | .340E 12 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .150E 12 | .116E 12 | .656E 11 | .551E 10 | .523E 10 | .479E 10 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .196E 12 | .167E 12 | .0 | .924E 11 | .879E 11 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .218E 12 | .189E 12 | .0 | .116E 12 | .110E 12 | .0 |
| 1401.-1500. | .150E 10 | .131E 10 | .101E 10 | .846E 09 | .804E 09 | .730E 09 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .251E 09 | .220E 09 | .172E 09 | .150E 09 | .142E 09 | .124E 09 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .947E 12 | .841E 12 | .0 | .646E 12 | .599E 12 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .563E 13 | .504E 13 | .261E 13 | .861E 12 | .803E 12 | .564E 10 |

SCC = 30400330--GRAY IRON MISCELLANEOUS CASTIN -TOTAL SCC -TOT RECS = 129

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 30 | .779E 10 | .731E 10 | .596E 10 | .0 | .0 | .0 |
| 33 | .508E 13 | .454E 13 | .237E 13 | .768E 12 | .715E 12 | .564E 10 |
| 34 | .539E 11 | .506E 11 | .412E 11 | .0 | .0 | .0 |
| 35 | .257E 12 | .225E 12 | .165E 11 | .924E 11 | .879E 11 | .0 |
| 99 | .232E 12 | .217E 12 | .177E 12 | .0 | .0 | .0 |
| | .563E 13 | .504E 13 | .261E 13 | .861E 12 | .803E 12 | .564E 10 |

CC 30400330--GRAY IRON MISCELLANEOUS CASTIN--TOTAL SCC -SIC = 0 -TOT RECS = 129

```
EMP RANGE     COUNT
                      ---------------------------------------------------------------------------------------------
   0.- 100.   .303E 13 !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 101.- 200.   .697E 12 !HHHHHHH
 201.- 300.   .0       !
 301.- 400.   .116E 12 !H
 401.- 500.   .0       !
 501.- 600.   .0       !
 601.- 700.   .0       !
 701.- 800.   .0       !
 801.- 900.   .0       !
 901.-1000.   .0       !
1001.-1100.   .0       !
1101.-1200.   .167E 12 !H
1201.-1300.   .0       !
1301.-1400.   .189E 12 !H
1401.-1500.   .131E 10 !H
1501.-1600.   .0       !
1601.-1700.   .220E 09 !
1701.-1800.   .0       !
1801.-1900.   .0       !
1901.-2000.   .0       !
2001.-2100.   .0       !
2101.-2200.   .841E 12 !HHHHHHHHH
2201.-2300.   .0       !
2301.-2400.   .0       !
2401.-2500.   .0       !
2501.-2600.   .0       !
2601.-2700.   .0       !
2701.-2800.   .0       !
2801.-2900.   .0       !
2901.-3000.   .0       !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400340--GRAY IRON GRINDING-CLEANING -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 42

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .323E 12 | .303E 12 | .455E 11 | .0 | .0 | .0 |
| 101.- 200. | .160E 12 | .120E 12 | .314E 11 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .737E 11 | .575E 11 | .335E 11 | .547E 10 | .520E 10 | .476E 10 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .556E 12 | .480E 12 | .110E 12 | .547E 10 | .520E 10 | .476E 10 |

SCC = 30400340--GRAY IRON GRINDING-CLEANING -NO CONTROL EQUIPMENT -TOT RECS = 42

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .157E 11 | .147E 11 | .0 | .0 | .0 | .0 |
| 33 | .392E 12 | .338E 12 | .498E 11 | .0 | .0 | .0 |
| 34 | .104E 12 | .856E 11 | .564E 11 | .547E 10 | .520E 10 | .476E 10 |
| 35 | .288E 11 | .270E 11 | .414E 10 | .0 | .0 | .0 |
| 99 | .157E 11 | .147E 11 | .0 | .0 | .0 | .0 |
| | .556E 12 | .480E 12 | .110E 12 | .547E 10 | .520E 10 | .476E 10 |

CC = 30400340--GRAY IRON GRINDING-CLEANING -- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 42

```
TEMP RANGE    COUNT
                       --------------------------------------------------------------------------------
   0.- 100.   .303E 12 !HHH
 101.- 200.   .120E 12 !H
 201.- 300.   .0       !
 301.- 400.   .575E 11 !H
 401.- 500.   .0       !
 501.- 600.   .0       !
 601.- 700.   .0       !
 701.- 800.   .0       !
 801.- 900.   .0       !
 901.-1000.   .0       !
1001.-1100.   .0       !
1101.-1200.   .0       !
1201.-1300.   .0       !
1301.-1400.   .0       !
1401.-1500.   .0       !
1501.-1600.   .0       !
1601.-1700.   .0       !
1701.-1800.   .0       !
1801.-1900.   .0       !
1901.-2000.   .0       !
2001.-2100.   .0       !
2101.-2200.   .0       !
2201.-2300.   .0       !
2301.-2400.   .0       !
2401.-2500.   .0       !
2501.-2600.   .0       !
2601.-2700.   .0       !
2701.-2800.   .0       !
2801.-2900.   .0       !
2901.-3000.   .0       !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400340--GRAY IRON GRINDING-CLEANING -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 305

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .170E 13 | .159E 13 | .818E 12 | .0 | .0 | .0 |
| 101.- 200. | .154E 12 | .141E 12 | .774E 11 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .185E 13 | .173E 13 | .895E 12 | .0 | .0 | .0 |

SCC = 30400340--GRAY IRON GRINDING-CLEANING -WITH CONTROL EQUIPMENT -TOT RECS = 305

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 28 | .151E 10 | .142E 10 | .116E 10 | .0 | .0 | .0 |
| 30 | .799E 10 | .749E 10 | .611E 10 | .0 | .0 | .0 |
| 32 | .596E 10 | .559E 10 | .456E 10 | .0 | .0 | .0 |
| 33 | .133E 13 | .124E 13 | .556E 12 | .0 | .0 | .0 |
| 34 | .160E 12 | .150E 12 | .108E 12 | .0 | .0 | .0 |
| 35 | .161E 12 | .151E 12 | .965E 11 | .0 | .0 | .0 |
| 36 | .899E 09 | .843E 09 | .687E 09 | .0 | .0 | .0 |
| 37 | .421E 11 | .395E 11 | .322E 11 | .0 | .0 | .0 |
| 50 | .157E 08 | .147E 08 | .120E 08 | .0 | .0 | .0 |
| 99 | .141E 12 | .133E 12 | .904E 11 | .0 | .0 | .0 |
| | .185E 13 | .173E 13 | .895E 12 | .0 | .0 | .0 |

CC =30400340--GRAY IRON GRINDING-CLEANING ---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 305

```
TEMP RANGE     COUNT

                           ------------------------------------------------------------------------------------
   0.- 100.  .159E 13   !HHHHHHHHHHHHHHH
 101.- 200.  .141E 12   !H
 201.- 300.  .0         !
 301.- 400.  .0         !
 401.- 500.  .0         !
 501.- 600.  .0         !
 601.- 700.  .0         !
 701.- 800.  .0         !
 801.- 900.  .0         !
 901.-1000.  .0         !
1001.-1100.  .0         !
1101.-1200.  .0         !
1201.-1300.  .0         !
1301.-1400.  .0         !
1401.-1500.  .0         !
1501.-1600.  .0         !
1601.-1700.  .0         !
1701.-1800.  .0         !
1801.-1900.  .0         !
1901.-2000.  .0         !
2001.-2100.  .0         !
2101.-2200.  .0         !
2201.-2300.  .0         !
2301.-2400.  .0         !
2401.-2500.  .0         !
2501.-2600.  .0         !
```

SCC= 30400340--GRAY IRON GRINDING-CLEANING -TOTAL SCC -SIC = 0 -TOT RECS = 347

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .202E 13 | .189E 13 | .863E 12 | .0 | .0 | .0 |
| 101.- 200. | .313E 12 | .260E 12 | .109E 12 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .737E 11 | .575E 11 | .335E 11 | .547E 10 | .520E 10 | .476E 10 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .241E 13 | .221E 13 | .101E 13 | .547E 10 | .520E 10 | .476E 10 |

SCC = 30400340--GRAY IRON   GRINDING-CLEANING   -TOTAL SCC -TOT RECS =   347

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 28 | .151E 10 | .142E 10 | .116E 10 | .0 | .0 | .0 |
| 30 | .799E 10 | .749E 10 | .611E 10 | .0 | .0 | .0 |
| 32 | .216E 11 | .203E 11 | .456E 10 | .0 | .0 | .0 |
| 33 | .172E 13 | .158E 13 | .606E 12 | .0 | .0 | .0 |
| 34 | .264E 12 | .236E 12 | .164E 12 | .0 | .0 | .0 |
| 35 | .190E 12 | .178E 12 | .101E 12 | .547E 10 | .520E 10 | .476E 10 |
| 36 | .899E 09 | .843E 09 | .687E 09 | .0 | .0 | .0 |
| 37 | .421E 11 | .395E 11 | .322E 11 | .0 | .0 | .0 |
| 50 | .157E 08 | .147E 08 | .120E 08 | .0 | .0 | .0 |
| 99 | .157E 12 | .147E 12 | .904E 11 | .0 | .0 | .0 |
| | .241E 13 | .221E 13 | .101E 13 | .547E 10 | .520E 10 | .476E 10 |

CC 30400340--GRAY IRON   GRINDING-CLEANING   --TOTAL SCC  -SIC =   0 -TOT RECS =   347

```
EMP RANGE    COUNT
                     --------------------------------------------------------------------------------
   0.- 100.  .189E 13  !HHHHHHHHHHHHHHHHHH
 101.- 200.  .260E 12  !HH
 201.- 300.  .0        !
 301.- 400.  .575E 11  !H
 401.- 500.  .0        !
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
```

SCC= 30400350--GRAY IRON    SAND HANDLING-GENERA -NO CONTROL EQUIPMENT -SIC =    0  -TOT RECS =    47

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .206E 12 | .193E 12 | .901E 11 | .0 | .0 | .0 |
| 101.- 200. | .132E 12 | .105E 12 | .210E 11 | .0 | .0 | .0 |
| 201.- 300. | .349E 11 | .264E 11 | .0 | .0 | .0 | .0 |
| 301.- 400. | .538E 10 | .417E 10 | .236E 10 | .209E 09 | .198E 09 | .182E 09 |
| 401.- 500. | .711E 09 | .560E 09 | .335E 09 | .801E 08 | .760E 08 | .696E 08 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .397E 11 | .333E 11 | .235E 11 | .152E 11 | .145E 11 | .132E 11 |
| 901.-1000. | .797E 11 | .672E 11 | .963E 10 | .325E 11 | .309E 11 | .550E 10 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .499E 12 | .430E 12 | .147E 12 | .480E 11 | .457E 11 | .190E 11 |

SCC = 30400350--GRAY IRON SAND HANDLING-GENERA -NO CONTROL EQUIPMENT -TOT RECS = 47

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .342E 10 | .321E 10 | .0 | .0 | .0 | .0 |
| 33 | .362E 12 | .306E 12 | .615E 11 | .328E 11 | .312E 11 | .575E 10 |
| 34 | .390E 11 | .366E 11 | .200E 11 | .0 | .0 | .0 |
| 35 | .619E 11 | .541E 11 | .405E 11 | .152E 11 | .145E 11 | .132E 11 |
| 37 | .328E 11 | .307E 11 | .250E 11 | .0 | .0 | .0 |
| | .499E 12 | .430E 12 | .147E 12 | .480E 11 | .457E 11 | .190E 11 |

CC = 30400350--GRAY IRON SAND HANDLING-GENERA-- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 47

```
TEMP RANGE     COUNT
                        ---------------------------------------------------------------------------------------------------
    0.- 100.  .193E 12  !H
  101.- 200.  .105E 12  !H
  201.- 300.  .264E 11  !H
  301.- 400.  .417E 10  !H
  401.- 500.  .560E 09  !
  501.- 600.  .0        !
  601.- 700.  .0        !
  701.- 800.  .0        !
  801.- 900.  .333E 11  !H
  901.-1000.  .672E 11  !H
 1001.-1100.  .0        !
 1101.-1200.  .0        !
 1201.-1300.  .0        !
 1301.-1400.  .0        !
 1401.-1500.  .0        !
 1501.-1600.  .0        !
 1601.-1700.  .0        !
 1701.-1800.  .0        !
 1801.-1900.  .0        !
 1901.-2000.  .0        !
 2001.-2100.  .0        !
 2101.-2200.  .0        !
 2201.-2300.  .0        !
 2301.-2400.  .0        !
 2401.-2500.  .0        !
 2501.-2600.  .0        !
 2601.-2700.  .0        !
 2701.-2800.  .0        !
 2801.-2900.  .0        !
 2901.-3000.  .0        !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400350--GRAY IRON    SAND HANDLING-GENERA  -WITH CONTROL EQUIPMENT -SIC =    0 -TOT RECS =    153

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .206E 13 | .193E 13 | .105E 13 | .0 | .0 | .0 |
| 101.- 200. | .724E 12 | .619E 12 | .333E 12 | .0 | .0 | .0 |
| 201.- 300. | .791E 11 | .599E 11 | .315E 11 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .286E 13 | .261E 13 | .141E 13 | .0 | .0 | .0 |

SCC = 30400350--GRAY IRON   SAND HANDLING-GENERA -WITH CONTROL EQUIPMENT -TOT RECS =   153

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .512E 11 | .480E 11 | .199E 11 | .0 | .0 | .0 |
| 33 | .223E 13 | .202E 13 | .103E 13 | .0 | .0 | .0 |
| 34 | .461E 11 | .433E 11 | .295E 11 | .0 | .0 | .0 |
| 35 | .197E 12 | .184E 12 | .113E 12 | .0 | .0 | .0 |
| 37 | .302E 12 | .283E 12 | .212E 12 | .0 | .0 | .0 |
| 99 | .325E 11 | .305E 11 | .558E 10 | .0 | .0 | .0 |
| | .286E 13 | .261E 13 | .141E 13 | .0 | .0 | .0 |

CC =30400350--GRAY IRON   SAND HANDLING-GENERA---WITH CONTROL EQUIPMENT  -SIC=   0 -TOTAL RECS =   153

```
TEMP RANGE   COUNT

                        ----------------------------------------------------------------------------------------------------
   0.- 100.  .193E 13  !HHHHHHHHHHHHHHHHHHH
 101.- 200.  .619E 12  !HHHHHH
 201.- 300.  .599E 11  !H
 301.- 400.  .0        !
 401.- 500.  .0        !
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400350--GRAY IRON SAND HANDLING-GENERA -TOTAL SCC -SIC = 0 -TOT RECS = 200

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .226E 13 | .212E 13 | .114E 13 | .0 | .0 | .0 |
| 101.- 200. | .856E 12 | .725E 12 | .354E 12 | .0 | .0 | .0 |
| 201.- 300. | .114E 12 | .864E 11 | .315E 11 | .0 | .0 | .0 |
| 301.- 400. | .538E 10 | .417E 10 | .236E 10 | .209E 09 | .198E 09 | .182E 09 |
| 401.- 500. | .711E 09 | .560E 09 | .335E 09 | .801E 08 | .760E 08 | .696E 08 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .397E 11 | .333E 11 | .235E 11 | .152E 11 | .145E 11 | .132E 11 |
| 901.-1000. | .797E 11 | .672E 11 | .963E 10 | .325E 11 | .309E 11 | .550E 10 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .336E 13 | .304E 13 | .156E 13 | .480E 11 | .457E 11 | .190E 11 |

SCC = 30400350--GRAY IRON   SAND HANDLING-GENERA -TOTAL SCC -TOT RECS =    200

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .546E 11 | .512E 11 | .199E 11 | .0 | .0 | .0 |
| 33 | .259E 13 | .232E 13 | .109E 13 | .328E 11 | .312E 11 | .575E 10 |
| 34 | .851E 11 | .799E 11 | .495E 11 | .0 | .0 | .0 |
| 35 | .259E 12 | .238E 12 | .154E 12 | .152E 11 | .145E 11 | .132E 11 |
| 37 | .335E 12 | .314E 12 | .237E 12 | .0 | .0 | .0 |
| 99 | .325E 11 | .305E 11 | .558E 10 | .0 | .0 | .0 |
| | .336E 13 | .304E 13 | .156E 13 | .480E 11 | .457E 11 | .190E 11 |

CC 30400350--GRAY IRON   SAND HANDLING-GENERA--TOTAL SCC  -SIC =    0 -TOT RECS =    200

```
EMP RANGE   COUNT
                      ------------------------------------------------------------------------------------------------------
   0.- 100.  .212E 13  !HHHHHHHHHHHHHHHHHHHHHH
 101.- 200.  .725E 12  !HHHHHHHH
 201.- 300.  .864E 11  !H
 301.- 400.  .417E 10  !H
 401.- 500.  .560E 09  !
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .333E 11  !H
 901.-1000.  .672E 11  !H
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400399--GRAY IRON    OTHER/NOT CLASSIFIED -NO CONTROL EQUIPMENT -SIC =    0  -TOT RECS =    128

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .274E 12 | .257E 12 | .188E 12 | .0 | .0 | .0 |
| 101.- 200. | .220E 13 | .168E 13 | .415E 12 | .0 | .0 | .0 |
| 201.- 300. | .311E 12 | .235E 12 | .123E 12 | .0 | .0 | .0 |
| 301.- 400. | .111E 12 | .863E 11 | .252E 11 | .650E 10 | .617E 10 | .218E 10 |
| 401.- 500. | .120E 12 | .953E 11 | .586E 11 | .181E 11 | .172E 11 | .158E 11 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .685E 11 | .561E 11 | .0 | .193E 11 | .183E 11 | .0 |
| 701.- 800. | .728E 10 | .599E 10 | .405E 10 | .221E 10 | .210E 10 | .192E 10 |
| 801.- 900. | .785E 11 | .658E 11 | .465E 11 | .300E 11 | .286E 11 | .261E 11 |
| 901.-1000. | .103E 12 | .864E 11 | .615E 11 | .408E 11 | .388E 11 | .354E 11 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .271E 12 | .235E 12 | .180E 12 | .149E 12 | .141E 12 | .128E 12 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .119E 12 | .104E 12 | .0 | .702E 11 | .667E 11 | .0 |
| 1701.-1800. | .151E 11 | .132E 11 | .104E 11 | .927E 10 | .880E 10 | .748E 10 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .139E 12 | .123E 12 | .0 | .906E 11 | .859E 11 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .195E 12 | .174E 12 | .0 | .150E 12 | .131E 12 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .402E 13 | .321E 13 | .111E 13 | .585E 12 | .545E 12 | .217E 12 |

SCC = 30400399--GRAY IRON OTHER/NOT CLASSIFIED -NO CONTROL EQUIPMENT -TOT RECS = 128

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .443E 11 | .339E 11 | .223E 10 | .0 | .0 | .0 |
| 33 | .367E 13 | .292E 13 | .961E 12 | .576E 12 | .536E 12 | .210E 12 |
| 34 | .110E 12 | .989E 11 | .721E 11 | .0 | .0 | .0 |
| 35 | .828E 11 | .622E 11 | .0 | .0 | .0 | .0 |
| 36 | .151E 11 | .132E 11 | .104E 11 | .927E 10 | .880E 10 | .748E 10 |
| 37 | .818E 11 | .767E 11 | .625E 11 | .0 | .0 | .0 |
| 99 | .881E 10 | .663E 10 | .329E 10 | .0 | .0 | .0 |
| | .402E 13 | .321E 13 | .111E 13 | .585E 12 | .545E 12 | .217E 12 |

CC = 30400399--GRAY IRON OTHER/NOT CLASSIFIED-- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 128

```
TEMP RANGE    COUNT
                        ----------------------------------------------------------------------------------------------------
    0.- 100.  .257E 12  !HH
  101.- 200.  .168E 13  !HHHHHHHHHHHHHHHHH
  201.- 300.  .235E 12  !HH
  301.- 400.  .863E 11  !H
  401.- 500.  .953E 11  !H
  501.- 600.  .0        !
  601.- 700.  .561E 11  !H
  701.- 800.  .599E 10  !H
  801.- 900.  .658E 11  !H
  901.-1000.  .864E 11  !H
 1001.-1100.  .0        !
 1101.-1200.  .0        !
 1201.-1300.  .0        !
 1301.-1400.  .0        !
 1401.-1500.  .235E 12  !HH
 1501.-1600.  .0        !
 1601.-1700.  .104E 12  !H
 1701.-1800.  .132E 11  !H
 1801.-1900.  .0        !
 1901.-2000.  .123E 12  !H
 2001.-2100.  .0        !
 2101.-2200.  .0        !
 2201.-2300.  .0        !
 2301.-2400.  .0        !
 2401.-2500.  .0        !
 2501.-2600.  .0        !
 2601.-2700.  .0        !
 2701.-2800.  .174E 12  !H
 2801.-2900.  .0        !
 2901.-3000.  .0        !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400399--GRAY IRON OTHER/NOT CLASSIFIED -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 132

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .115E 13 | .108E 13 | .643E 12 | .0 | .0 | .0 |
| 101.- 200. | .113E 13 | .930E 12 | .449E 12 | .0 | .0 | .0 |
| 201.- 300. | .190E 12 | .145E 12 | .459E 11 | .0 | .0 | .0 |
| 301.- 400. | .475E 10 | .368E 10 | .210E 10 | .230E 09 | .218E 09 | .199E 09 |
| 401.- 500. | .250E 10 | .199E 10 | .122E 10 | .380E 09 | .361E 09 | .330E 09 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .178E 10 | .147E 10 | .101E 10 | .590E 09 | .561E 09 | .513E 09 |
| 801.- 900. | .152E 11 | .127E 11 | .882E 10 | .541E 10 | .515E 10 | .471E 10 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .250E 13 | .217E 13 | .115E 13 | .661E 10 | .629E 10 | .575E 10 |

SCC = 30400399--GRAY IRON   OTHER/NOT CLASSIFIED -WITH CONTROL EQUIPMENT -TOT RECS =   132

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .136E 11 | .128E 11 | .104E 11 | .0 | .0 | .0 |
| 33 | .222E 13 | .192E 13 | .997E 12 | .661E 10 | .629E 10 | .575E 10 |
| 34 | .827E 11 | .726E 11 | .370E 11 | .0 | .0 | .0 |
| 37 | .109E 12 | .102E 12 | .835E 11 | .0 | .0 | .0 |
| 99 | .741E 11 | .695E 11 | .230E 11 | .0 | .0 | .0 |
| | .250E 13 | .217E 13 | .115E 13 | .661E 10 | .629E 10 | .575E 10 |

CC =30400399--GRAY IRON   OTHER/NOT CLASSIFIED---WITH CONTROL EQUIPMENT  -SIC=   0 -TOTAL RECS =   132

```
TEMP RANGE   COUNT
                         ----------------------------------------------------------------------------------------------------
   0.- 100.  .108E 13  !HHHHHHHHHH
 101.- 200.  .930E 12  !HHHHHHHHH
 201.- 300.  .145E 12  !H
 301.- 400.  .368E 10  !H
 401.- 500.  .199E 10  !H
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .147E 10  !H
 801.- 900.  .127E 11  !H
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400399--GRAY IRON    OTHER/NOT CLASSIFIED -TOTAL SCC -SIC =    0 -TOT RECS =    260

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .142E 13 | .134E 13 | .831E 12 | .0 | .0 | .0 |
| 101.- 200. | .333E 13 | .261E 13 | .863E 12 | .0 | .0 | .0 |
| 201.- 300. | .501E 12 | .380E 12 | .168E 12 | .0 | .0 | .0 |
| 301.- 400. | .116E 12 | .900E 11 | .273E 11 | .673E 10 | .639E 10 | .238E 10 |
| 401.- 500. | .122E 12 | .973E 11 | .598E 11 | .185E 11 | .176E 11 | .161E 11 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .685E 11 | .561E 11 | .0 | .193E 11 | .183E 11 | .0 |
| 701.- 800. | .906E 10 | .747E 10 | .507E 10 | .280E 10 | .266E 10 | .243E 10 |
| 801.- 900. | .937E 11 | .784E 11 | .553E 11 | .354E 11 | .337E 11 | .308E 11 |
| 901.-1000. | .103E 12 | .864E 11 | .615E 11 | .408E 11 | .388E 11 | .354E 11 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .271E 12 | .235E 12 | .180E 12 | .149E 12 | .141E 12 | .128E 12 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .119E 12 | .104E 12 | .0 | .702E 11 | .667E 11 | .0 |
| 1701.-1800. | .151E 11 | .132E 11 | .104E 11 | .927E 10 | .880E 10 | .748E 10 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .139E 12 | .123E 12 | .0 | .906E 11 | .859E 11 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .195E 12 | .174E 12 | .0 | .150E 12 | .131E 12 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .651E 13 | .539E 13 | .226E 13 | .592E 12 | .551E 12 | .223E 12 |

SCC = 30400399--GRAY IRON   OTHER/NOT CLASSIFIED -TOTAL SCC -TOT RECS =   260

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .579E 11 | .466E 11 | .126E 11 | .0 | .0 | .0 |
| 33 | .589E 13 | .484E 13 | .196E 13 | .583E 12 | .543E 12 | .215E 12 |
| 34 | .192E 12 | .171E 12 | .109E 12 | .0 | .0 | .0 |
| 35 | .828E 11 | .622E 11 | .0 | .0 | .0 | .0 |
| 36 | .151E 11 | .132E 11 | .104E 11 | .927E 10 | .880E 10 | .748E 10 |
| 37 | .191E 12 | .179E 12 | .146E 12 | .0 | .0 | .0 |
| 99 | .829E 11 | .761E 11 | .263E 11 | .0 | .0 | .0 |
| | .651E 13 | .539E 13 | .226E 13 | .592E 12 | .551E 12 | .223E 12 |

CC 30400399--GRAY IRON   OTHER/NOT CLASSIFIED--TOTAL SCC -SIC =   0 -TOT RECS =   260

```
EMP RANGE   COUNT

   0.- 100.  .134E 13  !HHHHHHHHHHHHHH
 101.- 200.  .261E 13  !HHHHHHHHHHHHHHHHHHHHHHHHHHHH
 201.- 300.  .380E 12  !HHH
 301.- 400.  .900E 11  !H
 401.- 500.  .973E 11  !H
 501.- 600.  .0        !
 601.- 700.  .561E 11  !H
 701.- 800.  .747E 10  !H
 801.- 900.  .784E 11  !H
 901.-1000.  .864E 11  !H
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .235E 12  !HH
1501.-1600.  .0        !
1601.-1700.  .104E 12  !H
1701.-1800.  .132E 11  !H
1801.-1900.  .0        !
1901.-2000.  .123E 12  !H
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .174E 12  !H
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400401--LEAD SMELTIN POT FURNACE -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 37

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .344E 10 | .323E 10 | .0 | .0 | .0 | .0 |
| 101.- 200. | .609E 11 | .500E 11 | .226E 11 | .0 | .0 | .0 |
| 201.- 300. | .105E 07 | .802E 06 | .440E 06 | .0 | .0 | .0 |
| 301.- 400. | .128E 12 | .991E 11 | .381E 10 | .502E 10 | .477E 10 | .541E 09 |
| 401.- 500. | .569E 09 | .452E 09 | .278E 09 | .865E 08 | .821E 08 | .751E 08 |
| 501.- 600. | .630E 11 | .510E 11 | .271E 11 | .147E 11 | .139E 11 | .104E 11 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .160E 11 | .132E 11 | .180E 10 | .490E 10 | .466E 10 | .857E 09 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .116E 11 | .103E 11 | .819E 10 | .755E 10 | .716E 10 | .584E 10 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .283E 12 | .227E 12 | .638E 11 | .322E 11 | .306E 11 | .178E 11 |

SCC = 30400401--LEAD SMELTINPOT FURNACE -NO CONTROL EQUIPMENT -TOT RECS = 37

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 27 | .920E 10 | .712E 10 | .0 | .338E 09 | .321E 09 | .0 |
| 28 | .360E 10 | .270E 10 | .132E 10 | .0 | .0 | .0 |
| 30 | .920E 10 | .712E 10 | .0 | .338E 09 | .321E 09 | .0 |
| 33 | .168E 12 | .135E 12 | .214E 11 | .963E 10 | .915E 10 | .155E 08 |
| 34 | .300E 11 | .245E 11 | .819E 10 | .822E 10 | .780E 10 | .584E 10 |
| 35 | .322E 10 | .265E 10 | .180E 10 | .985E 09 | .937E 09 | .857E 09 |
| 36 | .392E 11 | .318E 11 | .206E 11 | .915E 10 | .868E 10 | .795E 10 |
| 37 | .815E 10 | .636E 10 | .370E 10 | .605E 09 | .575E 09 | .526E 09 |
| 59 | .129E 11 | .105E 11 | .676E 10 | .297E 10 | .282E 10 | .258E 10 |
| | .283E 12 | .227E 12 | .638E 11 | .322E 11 | .306E 11 | .178E 11 |

CC = 30400401--LEAD SMELTIN POT FURNACE -- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 37

```
TEMP RANGE   COUNT
                      ------------------------------------------------------------------------------------------------------
   0.- 100.  .323E 10 !H
 101.- 200.  .500E 11 !H
 201.- 300.  .802E 06 !
 301.- 400.  .991E 11 !H
 401.- 500.  .452E 09 !
 501.- 600.  .510E 11 !H
 601.- 700.  .0       !
 701.- 800.  .132E 11 !H
 801.- 900.  .0       !
 901.-1000.  .0       !
1001.-1100.  .0       !
1101.-1200.  .0       !
1201.-1300.  .0       !
1301.-1400.  .0       !
1401.-1500.  .0       !
1501.-1600.  .0       !
1601.-1700.  .0       !
1701.-1800.  .0       !
1801.-1900.  .0       !
1901.-2000.  .103E 11 !H
2001.-2100.  .0       !
2101.-2200.  .0       !
2201.-2300.  .0       !
2301.-2400.  .0       !
2401.-2500.  .0       !
2501.-2600.  .0       !
2601.-2700.  .0       !
2701.-2800.  .0       !
2801.-2900.  .0       !
2901.-3000.  .0       !
                      0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400401--LEAD SMELTIN POT FURNACE -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 44

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .330E 12 | .310E 12 | .151E 12 | .0 | .0 | .0 |
| 101.- 200. | .619E 12 | .484E 12 | .152E 12 | .0 | .0 | .0 |
| 201.- 300. | .277E 11 | .209E 11 | .110E 11 | .0 | .0 | .0 |
| 301.- 400. | .688E 11 | .530E 11 | .295E 11 | .126E 10 | .119E 10 | .109E 10 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .117E 12 | .984E 11 | .706E 11 | .480E 11 | .457E 11 | .417E 11 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .116E 13 | .966E 12 | .414E 12 | .493E 11 | .469E 11 | .428E 11 |

SCC = 30400401--LEAD SMELTINPOT FURNACE -WITH CONTROL EQUIPMENT -TOT RECS = 44

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 28 | .300E 11 | .281E 11 | .262E 10 | .0 | .0 | .0 |
| 33 | .989E 12 | .814E 12 | .385E 12 | .493E 11 | .469E 11 | .428E 11 |
| 34 | .485E 10 | .455E 10 | .370E 10 | .0 | .0 | .0 |
| 36 | .291E 11 | .273E 11 | .222E 11 | .0 | .0 | .0 |
| 99 | .110E 12 | .927E 11 | .0 | .0 | .0 | .0 |
| | .116E 13 | .966E 12 | .414E 12 | .493E 11 | .469E 11 | .428E 11 |

CC =30400401--LEAD SMELTIN POT FURNACE ---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 44

```
TEMP RANGE    COUNT
                        ----------------------------------------------------------------------------------------------------
   0.- 100.   .310E 12  !HHH
 101.- 200.   .484E 12  !HHHH
 201.- 300.   .209E 11  !H
 301.- 400.   .530E 11  !H
 401.- 500.   .0        !
 501.- 600.   .0        !
 601.- 700.   .0        !
 701.- 800.   .0        !
 801.- 900.   .0        !
 901.-1000.   .984E 11  !H
1001.-1100.   .0        !
1101.-1200.   .0        !
1201.-1300.   .0        !
1301.-1400.   .0        !
1401.-1500.   .0        !
1501.-1600.   .0        !
1601.-1700.   .0        !
1701.-1800.   .0        !
1801.-1900.   .0        !
1901.-2000.   .0        !
2001.-2100.   .0        !
2101.-2200.   .0        !
2201.-2300.   .0        !
2301.-2400.   .0        !
2401.-2500.   .0        !
2501.-2600.   .0        !
2601.-2700.   .0        !
2701.-2800.   .0        !
2801.-2900.   .0        !
2901.-3000.   .0        !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400401--LEAD SMELTIN POT FURNACE -TOTAL SCC -SIC = 0 -TOT RECS = 81

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .334E 12 | .313E 12 | .151E 12 | .0 | .0 | .0 |
| 101.- 200. | .680E 12 | .534E 12 | .174E 12 | .0 | .0 | .0 |
| 201.- 300. | .277E 11 | .209E 11 | .110E 11 | .0 | .0 | .0 |
| 301.- 400. | .197E 12 | .152E 12 | .333E 11 | .628E 10 | .596E 10 | .163E 10 |
| 401.- 500. | .569E 09 | .452E 09 | .278E 09 | .865E 08 | .821E 08 | .751E 08 |
| 501.- 600. | .630E 11 | .510E 11 | .271E 11 | .147E 11 | .139E 11 | .104E 11 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .160E 11 | .132E 11 | .180E 10 | .490E 10 | .466E 10 | .857E 09 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .117E 12 | .984E 11 | .706E 11 | .480E 11 | .457E 11 | .417E 11 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .116E 11 | .103E 11 | .819E 10 | .755E 10 | .716E 10 | .584E 10 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .145E 13 | .119E 13 | .478E 12 | .815E 11 | .775E 11 | .605E 11 |

SCC = 30400401--LEAD SMELTINPOT FURNACE -TOTAL SCC -TOT RECS = 81

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 27 | .920E 10 | .712E 10 | .0 | .338E 09 | .321E 09 | .0 |
| 28 | .336E 11 | .308E 11 | .395E 10 | .0 | .0 | .0 |
| 30 | .920E 10 | .712E 10 | .0 | .338E 09 | .321E 09 | .0 |
| 33 | .116E 13 | .948E 12 | .407E 12 | .589E 11 | .561E 11 | .428E 11 |
| 34 | .348E 11 | .290E 11 | .119E 11 | .822E 10 | .780E 10 | .584E 10 |
| 35 | .322E 10 | .265E 10 | .180E 10 | .985E 09 | .937E 09 | .857E 09 |
| 36 | .683E 11 | .591E 11 | .428E 11 | .915E 10 | .868E 10 | .795E 10 |
| 37 | .815E 10 | .636E 10 | .370E 10 | .605E 09 | .575E 09 | .526E 09 |
| 59 | .129E 11 | .105E 11 | .676E 10 | .297E 10 | .282E 10 | .258E 10 |
| 99 | .110E 12 | .927E 11 | .0 | .0 | .0 | .0 |
| | .145E 13 | .119E 13 | .478E 12 | .815E 11 | .775E 11 | .605E 11 |

CC 30400401--LEAD SMELTIN POT FURNACE --TOTAL SCC -SIC = 0 -TOT RECS = 81

```
EMP RANGE    COUNT
                         ----------------------------------------------------------------------------------------------------
   0.- 100.  .313E 12   !HHH
 101.- 200.  .534E 12   !HHHHH
 201.- 300.  .209E 11   !H
 301.- 400.  .152E 12   !H
 401.- 500.  .452E 09   !
 501.- 600.  .510E 11   !H
 601.- 700.  .0         !
 701.- 800.  .132E 11   !H
 801.- 900.  .0         !
 901.-1000.  .984E 11   !H
1001.-1100.  .0         !
1101.-1200.  .0         !
1201.-1300.  .0         !
1301.-1400.  .0         !
1401.-1500.  .0         !
1501.-1600.  .0         !
1601.-1700.  .0         !
1701.-1800.  .0         !
1801.-1900.  .0         !
1901.-2000.  .103E 11   !H
2001.-2100.  .0         !
2101.-2200.  .0         !
2201.-2300.  .0         !
2301.-2400.  .0         !
2401.-2500.  .0         !
2501.-2600.  .0         !
```

SCC= 30400402--LEAD SMELTIN REVERBERATORY FURNAC -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 13

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .858E 10 | .805E 10 | .656E 10 | .0 | .0 | .0 |
| 101.- 200. | .137E 12 | .104E 12 | .169E 11 | .0 | .0 | .0 |
| 201.- 300. | .105E 10 | .788E 09 | .402E 09 | .0 | .0 | .0 |
| 301.- 400. | .293E 10 | .227E 10 | .130E 10 | .151E 09 | .144E 09 | .131E 09 |
| 401.- 500. | .252E 11 | .199E 11 | .119E 11 | .284E 10 | .270E 10 | .247E 10 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .118E 10 | .101E 10 | .751E 09 | .574E 09 | .545E 09 | .496E 09 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .176E 12 | .136E 12 | .378E 11 | .357E 10 | .339E 10 | .310E 10 |

SCC = 30400402--LEAD SMELTINREVERBERATORY FURNAC -NO CONTROL EQUIPMENT -TOT RECS = 13

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 28 | .196E 11 | .146E 11 | .0 | .0 | .0 | .0 |
| 30 | .196E 11 | .146E 11 | .0 | .0 | .0 | .0 |
| 33 | .115E 12 | .913E 11 | .371E 11 | .300E 10 | .284E 10 | .260E 10 |
| 34 | .196E 11 | .146E 11 | .0 | .0 | .0 | .0 |
| 50 | .118E 10 | .101E 10 | .751E 09 | .574E 09 | .545E 09 | .496E 09 |
| | .176E 12 | .136E 12 | .378E 11 | .357E 10 | .339E 10 | .310E 10 |

CC = 30400402--LEAD SMELTIN REVERBERATORY FURNAC-- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 13

```
TEMP RANGE   COUNT
                       ------------------------------------------------------------------------------------------------------
   0.- 100.  .805E 10  !H
 101.- 200.  .104E 12  !H
 201.- 300.  .788E 09  !
 301.- 400.  .227E 10  !H
 401.- 500.  .199E 11  !H
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .101E 10  !H
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400402--LEAD SMELTIN REVERBERATORY FURNAC -WITH CONTROL EQUIPMENT -SIC = 9 -TOT RECS = 31

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .274E 11 | .257E 11 | .852E 10 | .0 | .0 | .0 |
| 101.- 200. | .151E 13 | .117E 13 | .348E 12 | .0 | .0 | .0 |
| 201.- 300. | .195E 12 | .147E 12 | .746E 11 | .0 | .0 | .0 |
| 301.- 400. | .293E 12 | .227E 12 | .787E 11 | .137E 11 | .130E 11 | .468E 10 |
| 401.- 500. | .136E 10 | .108E 10 | .663E 09 | .206E 09 | .196E 09 | .179E 09 |
| 501.- 600. | .132E 12 | .107E 12 | .0 | .307E 11 | .292E 11 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .216E 13 | .167E 13 | .510E 12 | .446E 11 | .424E 11 | .486E 10 |

SCC = 30400402--LEAD SMELTINREVERBERATORY FURNAC -WITH CONTROL EQUIPMENT -TOT RECS = 31

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .192E 13 | .149E 13 | .450E 12 | .446E 11 | .424E 11 | .486E 10 |
| 36 | .161E 12 | .121E 12 | .605E 11 | .0 | .0 | .0 |
| 99 | .862E 11 | .648E 11 | .0 | .0 | .0 | .0 |
| | .216E 13 | .167E 13 | .510E 12 | .446E 11 | .424E 11 | .486E 10 |

CC =30400402--LEAD SMELTIN REVERBERATORY FURNAC---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 31

```
TEMP RANGE   COUNT
                      ----------------------------------------------------------------------------------------------------
   0.- 100.  .257E 11  !H
 101.- 200.  .117E 13  !HHHHHHHHHHH
 201.- 300.  .147E 12  !H
 301.- 400.  .227E 12  !HH
 401.- 500.  .108E 10  !H
 501.- 600.  .107E 12  !H
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                      0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400402--LEAD SMELTIN REVERBERATORY FURNAC -TOTAL SCC -SIC = 0 -TOT RECS = 44

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .359E 11 | .337E 11 | .151E 11 | .0 | .0 | .0 |
| 101.- 200. | .165E 13 | .127E 13 | .365E 12 | .0 | .0 | .0 |
| 201.- 300. | .196E 12 | .147E 12 | .750E 11 | .0 | .0 | .0 |
| 301.- 400. | .296E 12 | .229E 12 | .800E 11 | .138E 11 | .131E 11 | .481E 10 |
| 401.- 500. | .266E 11 | .210E 11 | .126E 11 | .305E 10 | .290E 10 | .265E 10 |
| 501.- 600. | .132E 12 | .107E 12 | .0 | .307E 11 | .292E 11 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .118E 10 | .101E 10 | .751E 09 | .574E 09 | .545E 09 | .496E 09 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .234E 13 | .181E 13 | .548E 12 | .482E 11 | .457E 11 | .796E 10 |

SCC = 30400402--LEAD SMELTINREVERBERATORY FURNAC -TOTAL SCC -TOT RECS = 44

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 28 | .196E 11 | .146E 11 | .0 | .0 | .0 | .0 |
| 30 | .196E 11 | .146E 11 | .0 | .0 | .0 | .0 |
| 33 | .203E 13 | .158E 13 | .487E 12 | .476E 11 | .452E 11 | .746E 10 |
| 34 | .196E 11 | .146E 11 | .0 | .0 | .0 | .0 |
| 36 | .161E 12 | .121E 12 | .605E 11 | .0 | .0 | .0 |
| 50 | .118E 10 | .101E 10 | .751E 09 | .574E 09 | .545E 09 | .496E 09 |
| 99 | .862E 11 | .648E 11 | .0 | .0 | .0 | .0 |
| | .234E 13 | .181E 13 | .548E 12 | .482E 11 | .457E 11 | .796E 10 |

CC 30400402--LEAD SMELTIN REVERBERATORY FURNAC--TOTAL SCC -SIC = 0 -TOT RECS = 44

```
EMP RANGE    COUNT

                           -----------------------------------------------------------------------------------------------------
   0.- 100.   .337E 11    !H
 101.- 200.   .127E 13    !HHHHHHHHHHHH
 201.- 300.   .147E 12    !H
 301.- 400.   .229E 12    !HH
 401.- 500.   .210E 11    !H
 501.- 600.   .107E 12    !H
 601.- 700.   .0          !
 701.- 800.   .0          !
 8C1.- 900.   .0          !
 901.-1000.   .0          !
1001.-1100.   .0          !
1101.-1200.   .0          !
1201.-1300.   .101E 10    !H
1301.-1400.   .0          !
1401.-1500.   .0          !
1501.-1600.   .0          !
1601.-1700.   .0          !
1701.-1800.   .0          !
1801.-1900.   .0          !
1901.-2000.   .0          !
2001.-2100.   .0          !
2101.-2200.   .0          !
2201.-2300.   .0          !
2301.-2400.   .0          !
2401.-2500.   .0          !
2501.-2600.   .0          !
2601.-2700.   .0          !
2701.-2800.   .0          !
2801.-2900.   .0          !
2901.-3000.   .0          !
                          0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400403--LEAD SMELTIN BLASTING AND CUPOLA -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 0

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|

0 RECORDS FOR THIS SECTION OF SCC

SCC = 30400403--LEAD SMELTINBLASTING AND CUPOLA -NO CONTROL EQUIPMENT -TOT RECS = 0

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|

SCC= 30400403--LEAD SMELTIN BLASTING AND CUPOLA -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 35

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .343E 10 | .322E 10 | .262E 10 | .0 | .0 | .0 |
| 101.- 200. | .243E 13 | .188E 13 | .708E 12 | .0 | .0 | .0 |
| 201.- 300. | .427E 12 | .322E 12 | .166E 12 | .0 | .0 | .0 |
| 301.- 400. | .273E 12 | .212E 12 | .295E 11 | .164E 11 | .156E 11 | .109E 10 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .215E 12 | .184E 12 | .136E 12 | .101E 12 | .965E 11 | .878E 11 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .335E 13 | .260E 13 | .104E 13 | .118E 12 | .112E 12 | .889E 11 |

SCC = 30400403--LEAD SMELTINBLASTING AND CUPOLA -WITH CONTROL EQUIPMENT -TOT RECS = 35

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 28 | .202E 11 | .151E 11 | .757E 10 | .0 | .0 | .0 |
| 33 | .289E 13 | .224E 13 | .813E 12 | .164E 11 | .156E 11 | .109E 10 |
| 34 | .215E 12 | .184E 12 | .136E 12 | .101E 12 | .965E 11 | .878E 11 |
| 99 | .224E 12 | .168E 12 | .857E 11 | .0 | .0 | .0 |
| | .335E 13 | .260E 13 | .104E 13 | .118E 12 | .112E 12 | .889E 11 |

CC =30400403--LEAD SMELTIN BLASTING AND CUPOLA ---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 35

```
TEMP RANGE   COUNT

                          ----------------------------------------------------------------------------------------------------
   0.- 100.  .322E 10     !H
 101.- 200.  .188E 13     !HHHHHHHHHHHHHHHHHHH
 201.- 300.  .322E 12     !HHH
 301.- 400.  .212E 12     !HH
 401.- 500.  .0           !
 501.- 600.  .0           !
 601.- 700.  .0           !
 701.- 800.  .0           !
 801.- 900.  .0           !
 901.-1000.  .0           !
1001.-1100.  .0           !
1101.-1200.  .184E 12     !H
1201.-1300.  .0           !
1301.-1400.  .0           !
1401.-1500.  .0           !
1501.-1600.  .0           !
1601.-1700.  .0           !
1701.-1800.  .0           !
1801.-1900.  .0           !
1901.-2000.  .0           !
2001.-2100.  .0           !
2101.-2200.  .0           !
2201.-2300.  .0           !
2301.-2400.  .0           !
2401.-2500.  .0           !
2501.-2600.  .0           !
2601.-2700.  .0           !
2701.-2800.  .0           !
2801.-2900.  .0           !
2901.-3000.  .0           !
                          0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400404--LEAD SMELTIN ROTARY REVERBERATORY -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 2

| TEMP | MAXIMUM | EXPECTED | MINIMUM | MAXIMUM | EXPECTED | MINIMUM |
|---|---|---|---|---|---|---|
| | 60 DEG | 60 DEG | 60 DEG | 300 DEG | 300 DEG | 300 DEG |

0 RECORDS FOR THIS SECTION OF SCC

SCC = 30400404--LEAD SMELTINROTARY REVERBERATORY -NO CONTROL EQUIPMENT -TOT RECS = 2

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|

SCC= 30400404--LEAD SMELTIN ROTARY REVERBERATORY -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 2

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .117E 12 | .110E 12 | .602E 11 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .117E 12 | .110E 12 | .602E 11 | .0 | .0 | .0 |

SCC = 30400404--LEAD SMELTINROTARY REVERBERATORY -WITH CONTROL EQUIPMENT -TOT RECS = 2

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .117E 12 | .110E 12 | .602E 11 | .0 | .0 | .0 |
| | .117E 12 | .110E 12 | .602E 11 | .0 | .0 | .0 |

CC =30400404--LEAD SMELTIN ROTARY REVERBERATORY---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 2

```
TEMP RANGE   COUNT
                        ----------------------------------------------------------------------------------------------------
   0.- 100.  .110E 12   !H
 101.- 200.  .0         !
 201.- 300.  .0         !
 301.- 400.  .0         !
 401.- 500.  .0         !
 501.- 600.  .0         !
 601.- 700.  .0         !
 701.- 800.  .0         !
 801.- 900.  .0         !
 901.-1000.  .0         !
1001.-1100.  .0         !
1101.-1200.  .0         !
1201.-1300.  .0         !
1301.-1400.  .0         !
1401.-1500.  .0         !
1501.-1600.  .0         !
1601.-1700.  .0         !
1701.-1800.  .0         !
1801.-1900.  .0         !
1901.-2000.  .0         !
2001.-2100.  .0         !
2101.-2200.  .0         !
2201.-2300.  .0         !
2301.-2400.  .0         !
2401.-2500.  .0         !
2501.-2600.  .0         !
2601.-2700.  .0         !
2701.-2800.  .0         !
2801.-2900.  .0         !
2901.-3000.  .0         !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400408--LEAD SMELTIN LEAD OXIDE MANUFACTU -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 4

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .170E 11 | .160E 11 | .786E 10 | .0 | .0 | .0 |
| 201.- 300. | .246E 11 | .186E 11 | .0 | .0 | .0 | .0 |
| 301.- 400. | .480E 09 | .374E 09 | .218E 09 | .356E 08 | .338E 08 | .310E 08 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .421E 11 | .350E 11 | .808E 10 | .356E 08 | .338E 08 | .310E 08 |

SCC = 30400408--LEAD SMELTINLEAD OXIDE MANUFACTU -NO CONTROL EQUIPMENT -TOT RECS = 4

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 28 | .417E 11 | .346E 11 | .786E 10 | .0 | .0 | .0 |
| 36 | .480E 09 | .374E 09 | .218E 09 | .356E 08 | .338E 08 | .310E 08 |
| | .421E 11 | .350E 11 | .808E 10 | .356E 08 | .338E 08 | .310E 08 |

CC = 30400408--LEAD SMELTIN LEAD OXIDE MANUFACTU-- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 4

```
TEMP RANGE   COUNT
                       ----------------------------------------------------------------------------------------------------
   0.- 100.  .0        !
 101.- 200.  .160E 11  !H
 201.- 300.  .186E 11  !H
 301.- 400.  .374E 09  !
 401.- 500.  .0        !
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400408--LEAD SMELTIN LEAD OXIDE MANUFACTU -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 35

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .676E 11 | .634E 11 | .991E 10 | .0 | .0 | .0 |
| 101.- 200. | .216E 12 | .167E 12 | .834E 11 | .0 | .0 | .0 |
| 201.- 300. | .823E 10 | .617E 10 | .310E 10 | .0 | .0 | .0 |
| 301.- 400. | .320E 09 | .250E 09 | .145E 09 | .238E 08 | .226E 08 | .206E 08 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .292E 12 | .237E 12 | .965E 11 | .238E 08 | .226E 08 | .206E 08 |

SCC = 30400408--LEAD SMELTINLEAD OXIDE MANUFACTU -WITH CONTROL EQUIPMENT -TOT RECS = 35

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 28 | .131E 12 | .112E 12 | .383E 11 | .0 | .0 | .0 |
| 33 | .148E 12 | .115E 12 | .512E 11 | .0 | .0 | .0 |
| 36 | .135E 11 | .111E 11 | .702E 10 | .238E 08 | .226E 08 | .206E 08 |
| | .292E 12 | .237E 12 | .965E 11 | .238E 08 | .226E 08 | .206E 08 |

CC =30400408--LEAD SMELTIN LEAD OXIDE MANUFACTU---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 35

```
TEMP RANGE   COUNT
                        ----------------------------------------------------------------------------------------------------
   0.- 100.  .634E 11  !H
 101.- 200.  .167E 12  !H
 201.- 300.  .617E 10  !H
 301.- 400.  .250E 09  !
 401.- 500.  .0        !
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400408--LEAD SMELTIN LEAD OXIDE MANUFACTU -TOTAL SCC -SIC = 0 -TOT RECS = 39

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .676E 11 | .634E 11 | .991E 10 | .0 | .0 | .0 |
| 101.- 200. | .233E 12 | .183E 12 | .912E 11 | .0 | .0 | .0 |
| 201.- 300. | .329E 11 | .248E 11 | .310E 10 | .0 | .0 | .0 |
| 301.- 400. | .800E 09 | .624E 09 | .363E 09 | .594E 08 | .564E 08 | .516E 08 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .334E 12 | .272E 12 | .105E 12 | .594E 08 | .564E 08 | .516E 08 |

SCC = 30400408--LEAD SMELTINLEAD OXIDE MANUFACTU -TOTAL SCC -TOT RECS = 39

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 28 | .172E 12 | .146E 12 | .462E 11 | .0 | .0 | .0 |
| 33 | .148E 12 | .115E 12 | .512E 11 | .0 | .0 | .0 |
| 36 | .140E 11 | .114E 11 | .724E 10 | .594E 08 | .564E 08 | .516E 08 |
| | .334E 12 | .272E 12 | .105E 12 | .594E 08 | .564E 08 | .516E 08 |

CC 30400408--LEAD SMELTIN LEAD OXIDE MANUFACTU--TOTAL SCC -SIC = 0 -TOT RECS = 39

```
EMP RANGE   COUNT
             ---------------------------------------------------------------------------------------------------
   0.- 100.  .634E 11  !H
 101.- 200.  .183E 12  !H
 201.- 300.  .248E 11  !H
 301.- 400.  .624E 09  !
 401.- 500.  .0        !
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400499--LEAD SMELTIN OTHER/NOT CLASSIFIED -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 35

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .224E 12 | .210E 12 | .116E 11 | .0 | .0 | .0 |
| 101.- 200. | .321E 11 | .240E 11 | .118E 11 | .0 | .0 | .0 |
| 201.- 300. | .293E 11 | .222E 11 | .116E 11 | .0 | .0 | .0 |
| 301.- 400. | .665E 09 | .519E 09 | .302E 09 | .494E 08 | .469E 08 | .429E 08 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .286E 12 | .257E 12 | .353E 11 | .494E 08 | .469E 08 | .429E 08 |

SCC = 30400499--LEAD SMELTINOTHER/NOT CLASSIFIED -NO CONTROL EQUIPMENT -TOT RECS =     35

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 27 | .177E 11 | .166E 11 | .226E 08 | .0 | .0 | .0 |
| 33 | .203E 12 | .188E 12 | .459E 10 | .494E 08 | .469E 08 | .429E 08 |
| 36 | .656E 11 | .521E 11 | .307E 11 | .0 | .0 | .0 |
| | .286E 12 | .257E 12 | .353E 11 | .494E 08 | .469E 08 | .429E 08 |

CC = 30400499--LEAD SMELTIN OTHER/NOT CLASSIFIED--  -NO CONTROL EQUIPMENT  -SIC=    0 -TOTAL RECS =     35

```
TEMP RANGE   COUNT

                       ------------------------------------------------------------------------------------------------------
   0.- 100.  .210E 12  !HH
 101.- 200.  .240E 11  !H
 201.- 300.  .222E 11  !H
 301.- 400.  .519E 09  !
 401.- 500.  .0        !
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400499--LEAD SMELTIN OTHER/NOT CLASSIFIED -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 27

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .303E 11 | .284E 11 | .126E 11 | .0 | .0 | .0 |
| 101.- 200. | .466E 12 | .356E 12 | .391E 11 | .0 | .0 | .0 |
| 201.- 300. | .335E 12 | .252E 12 | .129E 12 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .831E 12 | .636E 12 | .180E 12 | .0 | .0 | .0 |

SCC = 30400499--LEAD SMELTINOTHER/NOT CLASSIFIED -WITH CONTROL EQUIPMENT -TOT RECS = 27

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 28 | .464E 11 | .349E 11 | .0 | .0 | .0 | .0 |
| 33 | .515E 12 | .399E 12 | .945E 11 | .0 | .0 | .0 |
| 99 | .270E 12 | .203E 12 | .857E 11 | .0 | .0 | .0 |
| | .831E 12 | .636E 12 | .180E 12 | .0 | .0 | .0 |

CC =30400499--LEAD SMELTIN OTHER/NOT CLASSIFIED---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 27

```
TEMP RANGE     COUNT
                        ----------------------------------------------------------------------------------------------------
   0.- 100.   .284E 11  !H
 101.- 200.   .356E 12  !HHH
 201.- 300.   .252E 12  !HH
 301.- 400.   .0        !
 401.- 500.   .0        !
 501.- 600.   .0        !
 601.- 700.   .0        !
 701.- 800.   .0        !
 801.- 900.   .0        !
 901.-1000.   .0        !
1001.-1100.   .0        !
1101.-1200.   .0        !
1201.-1300.   .0        !
1301.-1400.   .0        !
1401.-1500.   .0        !
1501.-1600.   .0        !
1601.-1700.   .0        !
1701.-1800.   .0        !
1801.-1900.   .0        !
1901.-2000.   .0        !
2001.-2100.   .0        !
2101.-2200.   .0        !
2201.-2300.   .0        !
2301.-2400.   .0        !
2401.-2500.   .0        !
2501.-2600.   .0        !
2601.-2700.   .0        !
2701.-2800.   .0        !
2801.-2900.   .0        !
2901.-3000.   .0        !
                        !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400499--LEAD SMELTIN OTHER/NOT CLASSIFIED -TOTAL SCC -SIC = 0 -TOT RECS = 62

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .254E 12 | .238E 12 | .242E 11 | .0 | .0 | .0 |
| 101.- 200. | .498E 12 | .380E 12 | .509E 11 | .0 | .0 | .0 |
| 201.- 300. | .365E 12 | .274E 12 | .140E 12 | .0 | .0 | .0 |
| 301.- 400. | .665E 09 | .519E 09 | .302E 09 | .494E 08 | .469E 08 | .429E 08 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .112E 13 | .893E 12 | .216E 12 | .494E 08 | .469E 08 | .429E 08 |

SCC = 30400499--LEAD SMELTINOTHER/NOT CLASSIFIED -TOTAL SCC -TOT RECS = 62

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 27 | .177E 11 | .166E 11 | .226E 08 | .0 | .0 | .0 |
| 28 | .464E 11 | .349E 11 | .0 | .0 | .0 | .0 |
| 33 | .717E 12 | .586E 12 | .991E 11 | .494E 08 | .469E 08 | .429E 08 |
| 36 | .656E 11 | .521E 11 | .307E 11 | .0 | .0 | .0 |
| 99 | .270E 12 | .203E 12 | .857E 11 | .0 | .0 | .0 |
| | .112E 13 | .893E 12 | .216E 12 | .494E 08 | .469E 08 | .429E 08 |

CC 30400499--LEAD SMELTIN OTHER/NOT CLASSIFIED--TOTAL SCC -SIC = 0 -TOT RECS = 62

```
EMP RANGE    COUNT

                            ----------------------------------------------------------------------------------------------------
   0.- 100.  .238E 12   !HH
 101.- 200.  .380E 12   !HHH
 201.- 300.  .274E 12   !HH
 301.- 400.  .519E 09   !
 401.- 500.  .0         !
 501.- 600.  .0         !
 601.- 700.  .0         !
 701.- 800.  .0         !
 801.- 900.  .0         !
 901.-1000.  .0         !
1001.-1100.  .0         !
1101.-1200.  .0         !
1201.-1300.  .0         !
1301.-1400.  .0         !
1401.-1500.  .0         !
1501.-1600.  .0         !
1601.-1700.  .0         !
1701.-1800.  .0         !
1801.-1900.  .0         !
1901.-2000.  .0         !
2001.-2100.  .0         !
2101.-2200.  .0         !
2201.-2300.  .0         !
2301.-2400.  .0         !
2401.-2500.  .0         !
2501.-2600.  .0         !
2601.-2700.  .0         !
2701.-2800.  .0         !
2801.-2900.  .0         !
2901.-3000.  .0         !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400501--LEAD BATTERY TOTAL-GENERAL -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 15

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .110E 12 | .103E 12 | .202E 11 | .0 | .0 | .0 |
| 101.- 200. | .200E 12 | .172E 12 | .848E 11 | .0 | .0 | .0 |
| 201.- 300. | .719E 11 | .546E 11 | .109E 11 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .382E 12 | .330E 12 | .116E 12 | .0 | .0 | .0 |

SCC = 30400501--LEAD BATTERYTOTAL-GENERAL -NO CONTROL EQUIPMENT -TOT RECS = 15

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .776E 10 | .728E 10 | .0 | .0 | .0 | .0 |
| 36 | .336E 12 | .287E 12 | .116E 12 | .0 | .0 | .0 |
| 37 | .381E 11 | .357E 11 | .0 | .0 | .0 | .0 |
| | .382E 12 | .330E 12 | .116E 12 | .0 | .0 | .0 |

CC = 30400501--LEAD BATTERY TOTAL-GENERAL -- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 15

```
TEMP RANGE   COUNT
                    ------------------------------------------------------------------------------------------------------
   0.- 100.  .103E 12  !H
 101.- 200.  .172E 12  !H
 201.- 300.  .546E 11  !H
 301.- 400.  .0        !
 401.- 500.  .0        !
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400501--LEAD BATTERY TOTAL-GENERAL -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 12

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .119E 12 | .111E 12 | .751E 11 | .0 | .0 | .0 |
| 101.- 200. | .326E 11 | .306E 11 | .164E 11 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .151E 12 | .142E 12 | .914E 11 | .0 | .0 | .0 |

SCC = 30400501--LEAD BATTERYTOTAL-GENERAL -WITH CONTROL EQUIPMENT -TOT RECS = 12

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 28 | .787E 10 | .738E 10 | .601E 10 | .0 | .0 | .0 |
| 33 | .101E 11 | .950E 10 | .0 | .0 | .0 | .0 |
| 36 | .123E 12 | .115E 12 | .854E 11 | .0 | .0 | .0 |
| 99 | .101E 11 | .950E 10 | .0 | .0 | .0 | .0 |
| | .151E 12 | .142E 12 | .914E 11 | .0 | .0 | .0 |

CC =30400501--LEAD BATTERY TOTAL-GENERAL ---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 12

```
TEMP RANGE   COUNT

                        -----------------------------------------------------------------------------------------------
   0.- 100.  .111E 12  !H
 101.- 200.  .306E 11  !H
 201.- 300.  .0        !
 301.- 400.  .0        !
 401.- 500.  .0        !
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400501--LEAD BATTERY TOTAL-GENERAL -TOTAL SCC -SIC = 0 -TOT RECS = 27

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .228E 12 | .214E 12 | .952E 11 | .0 | .0 | .0 |
| 101.- 200. | .233E 12 | .203E 12 | .101E 12 | .0 | .0 | .0 |
| 201.- 300. | .719E 11 | .546E 11 | .109E 11 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .533E 12 | .472E 12 | .207E 12 | .0 | .0 | .0 |

SCC = 30400501--LEAD BATTERYTOTAL-GENERAL -TOTAL SCC -TOT RECS = 27

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 28 | .787E 10 | .738E 10 | .601E 10 | .0 | .0 | .0 |
| 33 | .179E 11 | .168E 11 | .0 | .0 | .0 | .0 |
| 36 | .459E 12 | .403E 12 | .201E 12 | .0 | .0 | .0 |
| 37 | .381E 11 | .357E 11 | .0 | .0 | .0 | .0 |
| 99 | .101E 11 | .950E 10 | .0 | .0 | .0 | .0 |
| | .533E 12 | .472E 12 | .207E 12 | .0 | .0 | .0 |

CC 30400501--LEAD BATTERY TOTAL-GENERAL --TOTAL SCC -SIC = 0 -TOT RECS = 27

```
EMP RANGE     COUNT
                        --------------------------------------------------------------------------------------------------------
   0.- 100.   .214E 12  !HH
 101.- 200.   .203E 12  !HH
 201.- 300.   .546E 11  !H
 301.- 400.   .0        !
 401.- 500.   .0        !
 501.- 600.   .0        !
 601.- 700.   .0        !
 701.- 800.   .0        !
 801.- 900.   .0        !
 901.-1000.   .0        !
1001.-1100.   .0        !
1101.-1200.   .0        !
1201.-1300.   .0        !
1301.-1400.   .0        !
1401.-1500.   .0        !
1501.-1600.   .0        !
1601.-1700.   .0        !
1701.-1800.   .0        !
1801.-1900.   .0        !
1901.-2000.   .0        !
2001.-2100.   .0        !
2101.-2200.   .0        !
2201.-2300.   .0        !
2301.-2400.   .0        !
2401.-2500.   .0        !
2501.-2600.   .0        !
2601.-2700.   .0        !
2701.-2800.   .0        !
2801.-2900.   .0        !
2901.-3000.   .0        !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400502--LEAD BATTERY CASTING FURNACE -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 3

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .349E 10 | .328E 10 | .0 | .0 | .0 | .0 |
| 101.- 200. | .207E 11 | .155E 11 | .762E 10 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .242E 11 | .188E 11 | .762E 10 | .0 | .0 | .0 |

SCC = 30400502--LEAD BATTERYCASTING FURNACE -NO CONTROL EQUIPMENT -TOT RECS = 3

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .207E 11 | .155E 11 | .762E 10 | .0 | .0 | .0 |
| 36 | .349E 10 | .328E 10 | .0 | .0 | .0 | .0 |
| | .242E 11 | .188E 11 | .762E 10 | .0 | .0 | .0 |

CC = 30400502--LEAD BATTERY CASTING FURNACE -- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 3

```
TEMP RANGE   COUNT
                        ---------------------------------------------------------------------
   0.- 100.  .328E 10  !H
 101.- 200.  .155E 11  !H
 201.- 300.  .0        !
 301.- 400.  .0        !
 401.- 500.  .0        !
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400502--LEAD BATTERY CASTING FURNACE -WITH CONTROL EQUIPMENT -SIC = ) -TOT RECS = 1

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .467E 11 | .438E 11 | .215E 11 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .467E 11 | .438E 11 | .215E 11 | .0 | .0 | .0 |

```
SCC = 30400502--LEAD BATTERYCASTING FURNACE      -WITH CONTROL EQUIPMENT -TOT RECS =     1

SIC           MAXIMUM    EXPECTED    MINIMUM     MAXIMUM     EXPECTED    MINIMUM
              60 DEG     60 DEG       60 DEG       300DEG    300 DEG     300 DEG
   36        .467E 11   .438E 11    .215E 11    .0          .0          .0

             .467E 11   .438E 11    .215E 11    .0          .0          .0


CC =30400502--LEAD BATTERY CASTING FURNACE     ---WITH CONTROL EQUIPMENT  -SIC=    0 -TOTAL RECS =      1

TEMP RANGE    COUNT
                         -----------------------------------------------------------------------------------------------------
   0.- 100.   .0         !
 101.- 200.   .438E 11   !H
 201.- 300.   .0         !
 301.- 400.   .0         !
 401.- 500.   .0         !
 501.- 600.   .0         !
 601.- 700.   .0         !
 701.- 800.   .0         !
 801.- 900.   .0         !
 901.-1000.   .0         !
1001.-1100.   .0         !
1101.-1200.   .0         !
1201.-1300.   .0         !
1301.-1400.   .0         !
1401.-1500.   .0         !
1501.-1600.   .0         !
1601.-1700.   .0         !
1701.-1800.   .0         !
1801.-1900.   .0         !
1901.-2000.   .0         !
2001.-2100.   .0         !
2101.-2200.   .0         !
2201.-2300.   .0         !
2301.-2400.   .0         !
2401.-2500.   .0         !
2501.-2600.   .0         !
2601.-2700.   .0         !
2701.-2800.   .0         !
2801.-2900.   .0         !
2901.-3000.   .0         !
                         0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400502--LEAD BATTERY CASTING FURNACE -TOTAL SCC -SIC = 0 -TOT RECS = 4

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .349E 10 | .328E 10 | .0 | .0 | .0 | .0 |
| 101.- 200. | .674E 11 | .593E 11 | .291E 11 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .709E 11 | .626E 11 | .291E 11 | .0 | .0 | .0 |

SCC = 30400502--LEAD BATTERYCASTING FURNACE -TOTAL SCC -TOT RECS = 4

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .207E 11 | .155E 11 | .762E 10 | .0 | .0 | .0 |
| 36 | .502E 11 | .471E 11 | .215E 11 | .0 | .0 | .0 |
| | .709E 11 | .626E 11 | .291E 11 | .0 | .0 | .0 |

CC 30400502--LEAD BATTERY CASTING FURNACE --TOTAL SCC -SIC = 0 -TOT RECS = 4

```
EMP RANGE    COUNT

                         -------------------------------------------------------------------------------------------------------
   0.- 100.  .328E 10   !H
 101.- 200.  .593E 11   !H
 201.- 300.  .0         !
 301.- 400.  .0         !
 401.- 500.  .0         !
 501.- 600.  .0         !
 601.- 700.  .0         !
 701.- 800.  .0         !
 801.- 900.  .0         !
 901.-1000.  .0         !
1001.-1100.  .0         !
1101.-1200.  .0         !
1201.-1300.  .0         !
1301.-1400.  .0         !
1401.-1500.  .0         !
1501.-1600.  .0         !
1601.-1700.  .0         !
1701.-1800.  .0         !
1801.-1900.  .0         !
1901.-2000.  .0         !
2001.-2100.  .0         !
2101.-2200.  .0         !
2201.-2300.  .0         !
2301.-2400.  .0         !
2401.-2500.  .0         !
2501.-2600.  .0         !
2601.-2700.  .0         !
2701.-2800.  .0         !
2801.-2900.  .0         !
2901.-3000.  .0         !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400503--LEAD BATTERY PASTE MIXER -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 3

| | | | | | | |
|---|---|---|---|---|---|---|
| TEMP | MAXIMUM | EXPECTED | MINIMUM | MAXIMUM | EXPECTED | MINIMUM |
| | 60 DEG | 60 DEG | 60 DEG | 300 DEG | 300 DEG | 300 DEG |

0 RECORDS FOR THIS SECTION OF SCC

SCC = 30400503--LEAD BATTERYPASTE MIXER -NO CONTROL EQUIPMENT -TOT RECS = 3

| SIC | MAXIMUM | EXPECTED | MINIMUM | MAXIMUM | EXPECTED | MINIMUM |
|---|---|---|---|---|---|---|
| | 60 DEG | 60 DEG | 60 DEG | 300 DEG | 300 DEG | 300 DEG |

SCC= 30400503--LEAD BATTERY PASTE MIXER -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 20

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .120E 12 | .112E 12 | .858E 11 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .120E 12 | .112E 12 | .858E 11 | .0 | .0 | .0 |

SCC = 30400503--LEAD BATTERYPASTE MIXER -WITH CONTROL EQUIPMENT -TOT RECS = 20

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 28 | .262E 10 | .246E 10 | .200E 10 | .0 | .0 | .0 |
| 33 | .127E 10 | .119E 10 | .968E 09 | .0 | .0 | .0 |
| 36 | .116E 12 | .109E 12 | .828E 11 | .0 | .0 | .0 |
| | .120E 12 | .112E 12 | .858E 11 | .0 | .0 | .0 |

CC =30400503--LEAD BATTERY PASTE MIXER ---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 20

| TEMP RANGE | COUNT | |
|---|---|---|
| 0.- 100. | .112E 12 | !H |
| 101.- 200. | .0 | ! |
| 201.- 300. | .0 | ! |
| 301.- 400. | .0 | ! |
| 401.- 500. | .0 | ! |
| 501.- 600. | .0 | ! |
| 601.- 700. | .0 | ! |
| 701.- 800. | .0 | ! |
| 801.- 900. | .0 | ! |
| 901.-1000. | .0 | ! |
| 1001.-1100. | .0 | ! |
| 1101.-1200. | .0 | ! |
| 1201.-1300. | .0 | ! |
| 1301.-1400. | .0 | ! |
| 1401.-1500. | .0 | ! |
| 1501.-1600. | .0 | ! |
| 1601.-1700. | .0 | ! |
| 1701.-1800. | .0 | ! |
| 1801.-1900. | .0 | ! |
| 1901.-2000. | .0 | ! |
| 2001.-2100. | .0 | ! |
| 2101.-2200. | .0 | ! |
| 2201.-2300. | .0 | ! |
| 2301.-2400. | .0 | ! |
| 2401.-2500. | .0 | ! |
| 2501.-2600. | .0 | ! |
| 2601.-2700. | .0 | ! |
| 2701.-2800. | .0 | ! |
| 2801.-2900. | .0 | ! |
| 2901.-3000. | .0 | ! |

```
0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400504--LEAD BATTERY THREE PROCESS OPERAT -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 1

| | | | | | | |
|---|---|---|---|---|---|---|
| TEMP | MAXIMUM | EXPECTED | MINIMUM | MAXIMUM | EXPECTED | MINIMUM |
| | 60 DEG | 60 DEG | 60 DEG | 300 DEG | 300 DEG | 300 DEG |

0 RECORDS FOR THIS SECTION OF SCC

SCC = 30400504--LEAD BATTERYTHREE PROCESS OPERAT -NO CONTROL EQUIPMENT -TOT RECS = 1

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|

SCC= 30400504--LEAD BATTERY THREE PROCESS OPERAT -WITH CONTROL EQUIPMENT -SIC = ) -TOT RECS = 0

| | | | | | | |
|---|---|---|---|---|---|---|
| TEMP | MAXIMUM | EXPECTED | MINIMUM | MAXIMUM | EXPECTED | MINIMUM |
| | 60 DEG | 60 DEG | 60 DEG | 300 DEG | 300 DEG | 300 DEG |

0 RECORDS FOR THIS SECTION OF SCC

SCC = 30400504--LEAD BATTERYTHREE PROCESS OPERAT -WITH CONTROL EQUIPMENT -TOT RECS = 0

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| TEMP OUTSIDE | CURVES | 8.0 | | | | |
| TEMP OUTSIDE | CURVES | 8.0 | | | | |
| TEMP OUTSIDE | CURVES | 8.0 | | | | |

SCC= 30400599--LEAD BATTERY OTHER/NOT CLASSIFIED -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 5

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .104E 11 | .973E 10 | .726E 10 | .0 | .0 | .0 |
| 101.- 200. | .645E 10 | .484E 10 | .238E 10 | .0 | .0 | .0 |
| 201.- 300. | .348E 10 | .262E 10 | .135E 10 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .203E 11 | .172E 11 | .110E 11 | .0 | .0 | .0 |

SCC = 30400599--LEAD BATTERYOTHER/NOT CLASSIFIED -NO CONTROL EQUIPMENT -TOT RECS = 5

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .732E 10 | .566E 10 | .238E 10 | .0 | .0 | .0 |
| 36 | .130E 11 | .115E 11 | .860E 10 | .0 | .0 | .0 |
| | .203E 11 | .172E 11 | .110E 11 | .0 | .0 | .0 |

CC = 30400599--LEAD BATTERY OTHER/NOT CLASSIFIED-- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 5

```
TEMP RANGE   COUNT
                        -----------------------------------------------------------------------------------------------------
   0.- 100.  .973E 10  !H
 101.- 200.  .484E 10  !H
 201.- 300.  .262E 10  !H
 301.- 400.  .0        !
 401.- 500.  .0        !
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400599--LEAD BATTERY OTHER/NOT CLASSIFIED -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 38

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .112E 13 | .105E 13 | .247E 12 | .0 | .0 | .0 |
| 101.- 200. | .115E 13 | .108E 13 | .205E 11 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .228E 13 | .213E 13 | .267E 12 | .0 | .0 | .0 |

SCC = 30400599--LEAD BATTERYOTHER/NOT CLASSIFIED -WITH CONTROL EQUIPMENT -TOT RECS = 38

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 36 | .133E 13 | .125E 13 | .267E 12 | .0 | .0 | .0 |
| 99 | .947E 12 | .888E 12 | .356E 09 | .0 | .0 | .0 |
| | .228E 13 | .213E 13 | .267E 12 | .0 | .0 | .0 |

CC =30400599--LEAD BATTERY OTHER/NOT CLASSIFIED---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 38

| TEMP RANGE | COUNT | |
|---|---|---|
| 0.- 100. | .105E 13 | !HHHHHHHHHH |
| 101.- 200. | .108E 13 | !HHHHHHHHHH |
| 201.- 300. | .0 | ! |
| 301.- 400. | .0 | ! |
| 401.- 500. | .0 | ! |
| 501.- 600. | .0 | ! |
| 601.- 700. | .0 | ! |
| 701.- 800. | .0 | ! |
| 801.- 900. | .0 | ! |
| 901.-1000. | .0 | ! |
| 1001.-1100. | .0 | ! |
| 1101.-1200. | .0 | ! |
| 1201.-1300. | .0 | ! |
| 1301.-1400. | .0 | ! |
| 1401.-1500. | .0 | ! |
| 1501.-1600. | .0 | ! |
| 1601.-1700. | .0 | ! |
| 1701.-1800. | .0 | ! |
| 1801.-1900. | .0 | ! |
| 1901.-2000. | .0 | ! |
| 2001.-2100. | .0 | ! |
| 2101.-2200. | .0 | ! |
| 2201.-2300. | .0 | ! |
| 2301.-2400. | .0 | ! |
| 2401.-2500. | .0 | ! |
| 2501.-2600. | .0 | ! |
| 2601.-2700. | .0 | ! |
| 2701.-2800. | .0 | ! |
| 2801.-2900. | .0 | ! |
| 2901.-3000. | .0 | ! |

0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100

SCC= 30400599--LEAD BATTERY OTHER/NOT CLASSIFIED -TOTAL SCC -SIC = 0 -TOT RECS = 43

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .113E 13 | .106E 13 | .254E 12 | .0 | .0 | .0 |
| 101.- 200. | .116E 13 | .108E 13 | .228E 11 | .0 | .0 | .0 |
| 201.- 300. | .348E 10 | .262E 10 | .135E 10 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .230E 13 | .215E 13 | .278E 12 | .0 | .0 | .0 |

SCC = 30400599--LEAD BATTERYOTHER/NOT CLASSIFIED -TOTAL SCC -TOT RECS = 43

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .732E 10 | .566E 10 | .238E 10 | .0 | .0 | .0 |
| 36 | .134E 13 | .126E 13 | .276E 12 | .0 | .0 | .0 |
| 99 | .947E 12 | .888E 12 | .356E 09 | .0 | .0 | .0 |
| | .230E 13 | .215E 13 | .278E 12 | .0 | .0 | .0 |

CC 30400599--LEAD BATTERY OTHER/NOT CLASSIFIED--TOTAL SCC -SIC = 0 -TOT RECS = 43

```
EMP RANGE   COUNT

                        ----------------------------------------------------------------------------------------------------
   0.- 100.  .106E 13  !HHHHHHHHHHH
 101.- 200.  .108E 13  !HHHHHHHHHHH
 201.- 300.  .262E 10  !H
 301.- 400.  .0        !
 401.- 500.  .0        !
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400601--MAGNESIUM SE POT FURNACE -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 4

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .711E 10 | .667E 10 | .324E 10 | .0 | .0 | .0 |
| 101.- 200. | .120E 11 | .897E 10 | .445E 10 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .184E 11 | .142E 11 | .0 | .404E 09 | .384E 09 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .376E 11 | .298E 11 | .769E 10 | .404E 09 | .384E 09 | .0 |

SCC = 30400601--MAGNESIUM SEPOT FURNACE -NO CONTROL EQUIPMENT -TOT RECS = 4

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .711E 10 | .667E 10 | .324E 10 | .0 | .0 | .0 |
| 99 | .304E 11 | .232E 11 | .445E 10 | .404E 09 | .384E 09 | .0 |
| | .376E 11 | .298E 11 | .769E 10 | .404E 09 | .384E 09 | .0 |

CC = 30400601--MAGNESIUM SE POT FURNACE -- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 4

```
TEMP RANGE    COUNT
                        ----------------------------------------------------------------------------------------------------
   0.- 100.  .667E 10  !H
 101.- 200.  .897E 10  !H
 201.- 300.  .0        !
 301.- 400.  .142E 11  !H
 401.- 500.  .0        !
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400601--MAGNESIUM SE POT FURNACE -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 1

| | | | | | | |
|---|---|---|---|---|---|---|
| TEMP | MAXIMUM | EXPECTED | MINIMUM | MAXIMUM | EXPECTED | MINIMUM |
| | 60 DEG | 60 DEG | 60 DEG | 300 DEG | 300 DEG | 300 DEG |

0 RECORDS FOR THIS SECTION OF SCC

SCC = 30400601--MAGNESIUM SEPOT FURNACE -WITH CONTROL EQUIPMENT -TOT RECS = 1

| SIC | MAXIMUM | EXPECTED | MINIMUM | MAXIMUM | EXPECTED | MINIMUM |
|---|---|---|---|---|---|---|
| | 60 DEG | 60 DEG | 60 DEG | 300DEG | 300 DEG | 300 DEG |

SCC= 30400699--MAGNESIUM SE OTHER/NOT CLASSIFIED -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 2

| TEMP | MAXIMUM | EXPECTED | MINIMUM | MAXIMUM | EXPECTED | MINIMUM |
|---|---|---|---|---|---|---|
| | 60 DEG | 60 DEG | 60 DEG | 300 DEG | 300 DEG | 300 DEG |

0 RECORDS FOR THIS SECTION OF SCC

SCC = 30400699--MAGNESIUM SEOTHER/NOT CLASSIFIED -NO CONTROL EQUIPMENT -TOT RECS = 2

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|

SCC= 30400699--MAGNESIUM SE OTHER/NOT CLASSIFIED -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 6

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .739E 11 | .693E 11 | .564E 11 | .0 | .0 | .0 |
| 101.- 200. | .212E 12 | .199E 12 | .109E 12 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .286E 12 | .269E 12 | .165E 12 | .0 | .0 | .0 |

SCC = 30400699--MAGNESIUM SEOTHER/NOT CLASSIFIED -WITH CONTROL EQUIPMENT -TOT RECS = 6

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .739E 11 | .693E 11 | .564E 11 | .0 | .0 | .0 |
| 33 | .212E 12 | .199E 12 | .109E 12 | .0 | .0 | .0 |
| | .286E 12 | .269E 12 | .165E 12 | .0 | .0 | .0 |

CC =30400699--MAGNESIUM SE OTHER/NOT CLASSIFIED---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 6

```
TEMP RANGE     COUNT

   0.- 100.   .693E 11   !H
 101.- 200.   .199E 12   !H
 201.- 300.   .0         !
 301.- 400.   .0         !
 401.- 500.   .0         !
 501.- 600.   .0         !
 601.- 700.   .0         !
 701.- 800.   .0         !
 801.- 900.   .0         !
 901.-1000.   .0         !
1001.-1100.   .0         !
1101.-1200.   .0         !
1201.-1300.   .0         !
1301.-1400.   .0         !
1401.-1500.   .0         !
1501.-1600.   .0         !
1601.-1700.   .0         !
1701.-1800.   .0         !
1801.-1900.   .0         !
1901.-2000.   .0         !
2001.-2100.   .0         !
2101.-2200.   .0         !
2201.-2300.   .0         !
2301.-2400.   .0         !
2401.-2500.   .0         !
2501.-2600.   .0         !
2601.-2700.   .0         !
2701.-2800.   .0         !
2801.-2900.   .0         !
2901.-3000.   .0         !
                         0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400701--STEEL FOUNDR ELECTRIC ARC FURNACE -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 43

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .128E 12 | .120E 12 | .665E 11 | .0 | .0 | .0 |
| 101.- 200. | .394E 12 | .307E 12 | .158E 12 | .0 | .0 | .0 |
| 201.- 300. | .122E 12 | .921E 11 | .0 | .0 | .0 | .0 |
| 301.- 400. | .141E 12 | .109E 12 | .629E 11 | .837E 10 | .794E 10 | .727E 10 |
| 401.- 500. | .359E 13 | .283E 13 | .802E 11 | .411E 12 | .390E 12 | .170E 11 |
| 501.- 600. | .167E 12 | .135E 12 | .0 | .389E 11 | .370E 11 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .112E 12 | .939E 11 | .664E 11 | .428E 11 | .408E 11 | .372E 11 |
| 901.-1000. | .222E 12 | .187E 12 | .0 | .913E 11 | .869E 11 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .487E 13 | .387E 13 | .434E 12 | .592E 12 | .563E 12 | .615E 11 |

SCC = 30400701--STEEL FOUNDRELECTRIC ARC FURNACE -NO CONTROL EQUIPMENT -TOT RECS = 43

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .407E 13 | .323E 13 | .355E 12 | .449E 12 | .427E 12 | .458E 11 |
| 34 | .127E 12 | .968E 11 | .386E 10 | .0 | .0 | .0 |
| 35 | .382E 12 | .313E 12 | .755E 11 | .109E 12 | .104E 12 | .157E 11 |
| 37 | .297E 12 | .234E 12 | .0 | .334E 11 | .317E 11 | .0 |
| | .487E 13 | .387E 13 | .434E 12 | .592E 12 | .563E 12 | .615E 11 |

CC = 30400701--STEEL FOUNDR ELECTRIC ARC FURNACE-- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 43

```
TEMP RANGE   COUNT
                      ----------------------------------------------------------------------------------------------------
   0.- 100.  .120E 12  !H
 101.- 200.  .307E 12  !HHH
 201.- 300.  .921E 11  !H
 301.- 400.  .109E 12  !H
 401.- 500.  .283E 13  !HHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 501.- 600.  .135E 12  !H
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .939E 11  !H
 901.-1000.  .187E 12  !H
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                      0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400701--STEEL FOUNDR ELECTRIC ARC FURNACE -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 147

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .874E 13 | .819E 13 | .228E 13 | .0 | .0 | .0 |
| 101.- 200. | .876E 13 | .669E 13 | .297E 13 | .0 | .0 | .0 |
| 201.- 300. | .547E 13 | .417E 13 | .223E 13 | .0 | .0 | .0 |
| 301.- 400. | .112E 13 | .871E 12 | .140E 12 | .449E 11 | .427E 11 | .132E 11 |
| 401.- 500. | .464E 12 | .369E 12 | .0 | .705E 11 | .669E 11 | .0 |
| 501.- 600. | .496E 12 | .401E 12 | .258E 12 | .110E 12 | .105E 12 | .958E 11 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .251E 14 | .207E 14 | .788E 13 | .226E 12 | .214E 12 | .109E 12 |

SCC = 30400701--STEEL FOUNDRELECTRIC ARC FURNACE -WITH CONTROL EQUIPMENT -TOT RECS = 147

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 28 | .185E 11 | .173E 11 | .141E 11 | .0 | .0 | .0 |
| 33 | .227E 14 | .187E 14 | .718E 13 | .211E 12 | .200E 12 | .109E 12 |
| 34 | .105E 13 | .914E 12 | .256E 12 | .149E 11 | .141E 11 | .0 |
| 35 | .938E 12 | .740E 12 | .304E 12 | .0 | .0 | .0 |
| 37 | .223E 12 | .210E 12 | .123E 12 | .0 | .0 | .0 |
| 99 | .151E 12 | .142E 12 | .0 | .0 | .0 | .0 |
| | .251E 14 | .207E 14 | .788E 13 | .226E 12 | .214E 12 | .109E 12 |

CC =30400701--STEEL FOUNDR ELECTRIC ARC FURNACE---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 147

```
TEMP RANGE   COUNT
                        ----------------------------------------------------------------------------------------------------
   0.- 100.  .819E 13  !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 101.- 200.  .669E 13  !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 201.- 300.  .417E 13  !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 301.- 400.  .871E 12  !HHHHHHHH
 401.- 500.  .369E 12  !HHH
 501.- 600.  .401E 12  !HHHH
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400701--STEEL FOUNDR ELECTRIC ARC FURNACE -TOTAL SCC -SIC = 0 -TOT RECS = 190

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .886E 13 | .831E 13 | .234E 13 | .0 | .0 | .0 |
| 101.- 200. | .915E 13 | .700E 13 | .313E 13 | .0 | .0 | .0 |
| 201.- 300. | .559E 13 | .426E 13 | .223E 13 | .0 | .0 | .0 |
| 301.- 400. | .127E 13 | .980E 12 | .202E 12 | .533E 11 | .506E 11 | .205E 11 |
| 401.- 500. | .405E 13 | .320E 13 | .802E 11 | .481E 12 | .457E 12 | .170E 11 |
| 501.- 600. | .663E 12 | .536E 12 | .258E 12 | .149E 12 | .142E 12 | .958E 11 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .112E 12 | .939E 11 | .664E 11 | .428E 11 | .408E 11 | .372E 11 |
| 901.-1000. | .222E 12 | .187E 12 | .0 | .913E 11 | .869E 11 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .299E 14 | .246E 14 | .831E 13 | .818E 12 | .777E 12 | .171E 12 |

SCC = 30400701--STEEL FOUNDRELECTRIC ARC FURNACE -TOTAL SCC -TOT RECS = 190

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 28 | .185E 11 | .173E 11 | .141E 11 | .0 | .0 | .0 |
| 33 | .267E 14 | .219E 14 | .754E 13 | .660E 12 | .627E 12 | .155E 12 |
| 34 | .118E 13 | .101E 13 | .259E 12 | .149E 11 | .141E 11 | .0 |
| 35 | .132E 13 | .105E 13 | .380E 12 | .109E 12 | .104E 12 | .157E 11 |
| 37 | .520E 12 | .443E 12 | .123E 12 | .334E 11 | .317E 11 | .0 |
| 99 | .151E 12 | .142E 12 | .0 | .0 | .0 | .0 |
| | .299E 14 | .246E 14 | .831E 13 | .818E 12 | .777E 12 | .171E 12 |

CC 30400701--STEEL FOUNDR ELECTRIC ARC FURNACE--TOTAL SCC -SIC = 0 -TOT RECS = 190

| EMP RANGE | COUNT |
|---|---|
| 0.- 100. | .831E 13 |
| 101.- 200. | .700E 13 |
| 201.- 300. | .426E 13 |
| 301.- 400. | .980E 12 |
| 401.- 500. | .320E 13 |
| 501.- 600. | .536E 12 |
| 601.- 700. | .0 |
| 701.- 800. | .0 |
| 801.- 900. | .939E 11 |
| 901.-1000. | .187E 12 |
| 1001.-1100. | .0 |
| 1101.-1200. | .0 |
| 1201.-1300. | .0 |
| 1301.-1400. | .0 |
| 1401.-1500. | .0 |
| 1501.-1600. | .0 |
| 1601.-1700. | .0 |
| 1701.-1800. | .0 |
| 1801.-1900. | .0 |
| 1901.-2000. | .0 |
| 2001.-2100. | .0 |
| 2101.-2200. | .0 |
| 2201.-2300. | .0 |
| 2301.-2400. | .0 |
| 2401.-2500. | .0 |
| 2501.-2600. | .0 |
| 2601.-2700. | .0 |
| 2701.-2800. | .0 |
| 2801.-2900. | .0 |
| 2901.-3000. | .0 |

SCC= 30400702--STEEL FOUNDR OPEN HEARTH FURNACE -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 9

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .305E 10 | .286E 10 | .233E 10 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .122E 12 | .932E 11 | .218E 11 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .235E 12 | .194E 12 | .133E 12 | .766E 11 | .729E 11 | .666E 11 |
| 801.- 900. | .351E 12 | .291E 12 | .201E 12 | .119E 12 | .113E 12 | .103E 12 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .136E 12 | .116E 12 | .0 | .643E 11 | .611E 11 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .456E 11 | .398E 11 | .309E 11 | .265E 11 | .251E 11 | .223E 11 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .893E 12 | .738E 12 | .389E 12 | .286E 12 | .272E 12 | .192E 12 |

SCC = 30400702--STEEL FOUNDROPEN HEARTH FURNACE -NO CONTROL EQUIPMENT -TOT RECS = 9

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .893E 12 | .738E 12 | .389E 12 | .286E 12 | .272E 12 | .192E 12 |
| | .893E 12 | .738E 12 | .389E 12 | .286E 12 | .272E 12 | .192E 12 |

CC = 30400702--STEEL FOUNDR OPEN HEARTH FURNACE -- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 9

```
TEMP RANGE    COUNT
                      ------------------------------------------------------------------------------------------
   0.- 100.  .286E 10  !H
 101.- 200.  .0        !
 201.- 300.  .932E 11  !H
 301.- 400.  .0        !
 401.- 500.  .0        !
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .194E 12  !H
 801.- 900.  .291E 12  !HH
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .116E 12  !H
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .398E 11  !H
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                      0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400702--STEEL FOUNDR OPEN HEARTH FURNACE -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 4

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .297E 11 | .278E 11 | .227E 11 | .0 | .0 | .0 |
| 101.- 200. | .611E 10 | .460E 10 | .226E 10 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .603E 11 | .470E 11 | .0 | .448E 10 | .425E 10 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .961E 11 | .795E 11 | .249E 11 | .448E 10 | .425E 10 | .0 |

SCC = 30400702--STEEL FOUNDROPEN HEARTH FURNACE -WITH CONTROL EQUIPMENT -TOT RECS = 4

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .961E 11 | .795E 11 | .249E 11 | .448E 10 | .425E 10 | .0 |
| | .961E 11 | .795E 11 | .249E 11 | .448E 10 | .425E 10 | .0 |

CC =30400702--STEEL FOUNDR OPEN HEARTH FURNACE ---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 4

```
TEMP RANGE   COUNT
                        -------------------------------------------------------------------------------------
   0.- 100.  .278E 11  !H
 101.- 200.  .460E 10  !H
 201.- 300.  .0        !
 301.- 400.  .470E 11  !H
 401.- 500.  .0        !
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400702--STEEL FOUNDR OPEN HEARTH FURNACE -TOTAL SCC -SIC = 0 -TOT RECS = 13

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .327E 11 | .307E 11 | .250E 11 | .0 | .0 | .0 |
| 101.- 200. | .611E 10 | .460E 10 | .226E 10 | .0 | .0 | .0 |
| 201.- 300. | .122E 12 | .932E 11 | .218E 11 | .0 | .0 | .0 |
| 301.- 400. | .603E 11 | .470E 11 | .0 | .448E 10 | .425E 10 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .235E 12 | .194E 12 | .133E 12 | .766E 11 | .729E 11 | .666E 11 |
| 801.- 900. | .351E 12 | .291E 12 | .201E 12 | .119E 12 | .113E 12 | .103E 12 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .136E 12 | .116E 12 | .0 | .643E 11 | .611E 11 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .456E 11 | .398E 11 | .309E 11 | .265E 11 | .251E 11 | .223E 11 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .989E 12 | .818E 12 | .414E 12 | .291E 12 | .277E 12 | .192E 12 |

SCC = 30400702--STEEL FOUNDROPEN HEARTH FURNACE -TOTAL SCC -TOT RECS = 13

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .989E 12 | .818E 12 | .414E 12 | .291E 12 | .277E 12 | .192E 12 |
| | .989E 12 | .818E 12 | .414E 12 | .291E 12 | .277E 12 | .192E 12 |

CC 30400702--STEEL FOUNDR OPEN HEARTH FURNACE --TOTAL SCC -SIC = 0 -TOT RECS = 13

```
EMP RANGE     COUNT
                     ----------------------------------------------------------------------------------------------------
   0.- 100.  .307E 11  !H
 101.- 200.  .460E 10  !H
 201.- 300.  .932E 11  !H
 301.- 400.  .470E 11  !H
 401.- 500.  .0        !
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .194E 12  !H
 801.- 900.  .291E 12  !HH
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .116E 12  !H
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .398E 11  !H
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                     0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400703--STEEL FOUNDR OPEN HEARTH OXYGEN L -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 7

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .834E 12 | .712E 12 | .452E 12 | .391E 12 | .372E 12 | .293E 12 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .556E 10 | .480E 10 | .363E 10 | .292E 10 | .277E 10 | .252E 10 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .840E 12 | .717E 12 | .456E 12 | .394E 12 | .375E 12 | .295E 12 |

SCC = 30400703--STEEL FOUNDROPEN HEARTH OXYGEN L -NO CONTROL EQUIPMENT -TOT RECS = 7

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .723E 12 | .617E 12 | .456E 12 | .341E 12 | .324E 12 | .295E 12 |
| 34 | .117E 12 | .996E 11 | .0 | .534E 11 | .508E 11 | .0 |
| | .840E 12 | .717E 12 | .456E 12 | .394E 12 | .375E 12 | .295E 12 |

CC = 30400703--STEEL FOUNDR OPEN HEARTH OXYGEN L-- -NO CONTROL EQUIPMENT -SIC= ) -TOTAL RECS = 7

```
TEMP RANGE   COUNT

                        ----------------------------------------------------------------------------------------------------
    0.- 100.   .0       !
  101.- 200.   .0       !
  201.- 300.   .0       !
  301.- 400.   .0       !
  401.- 500.   .0       !
  501.- 600.   .0       !
  601.- 700.   .0       !
  701.- 800.   .0       !
  801.- 900.   .0       !
  901.-1000.   .0       !
 1001.-1100.   .0       !
 1101.-1200.   .712E 12 !HHHHHHH
 1201.-1300.   .0       !
 1301.-1400.   .480E 10 !H
 1401.-1500.   .0       !
 1501.-1600.   .0       !
 1601.-1700.   .0       !
 1701.-1800.   .0       !
 1801.-1900.   .0       !
 1901.-2000.   .0       !
 2001.-2100.   .0       !
 2101.-2200.   .0       !
 2201.-2300.   .0       !
 2301.-2400.   .0       !
 2401.-2500.   .0       !
 2501.-2600.   .0       !
 2601.-2700.   .0       !
 2701.-2800.   .0       !
 2801.-2900.   .0       !
 2901.-3000.   .0       !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400703--STEEL FOUNDR OPEN HEARTH OXYGEN L -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 0

| | | | | | | |
|---|---|---|---|---|---|---|
| TEMP | MAXIMUM | EXPECTED | MINIMUM | MAXIMUM | EXPECTED | MINIMUM |
| | 60 DEG | 60 DEG | 60 DEG | 300 DEG | 300 DEG | 300 DEG |

0 RECORDS FOR THIS SECTION OF SCC

SCC = 30400703--STEEL FOUNDROPEN HEARTH OXYGEN L -WITH CONTROL EQUIPMENT -TOT RECS = 0

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|

SCC= 30400704--STEEL FOUNDR HEAT-TREATING FURNAC -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 141

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .949E 11 | .890E 11 | .573E 11 | .0 | .0 | .0 |
| 101.- 200. | .267E 12 | .200E 12 | .593E 11 | .0 | .0 | .0 |
| 201.- 300. | .692E 11 | .530E 11 | .290E 11 | .0 | .0 | .0 |
| 301.- 400. | .137E 12 | .106E 12 | .605E 11 | .669E 10 | .636E 10 | .582E 10 |
| 401.- 500. | .350E 12 | .278E 12 | .148E 12 | .505E 11 | .479E 11 | .394E 11 |
| 501.- 600. | .524E 12 | .424E 12 | .273E 12 | .119E 12 | .113E 12 | .103E 12 |
| 601.- 700. | .188E 12 | .154E 12 | .102E 12 | .500E 11 | .475E 11 | .434E 11 |
| 701.- 800. | .232E 11 | .192E 11 | .132E 11 | .767E 10 | .730E 10 | .667E 10 |
| 801.- 900. | .223E 12 | .187E 12 | .940E 11 | .849E 11 | .809E 11 | .526E 11 |
| 901.-1000. | .839E 12 | .707E 12 | .383E 12 | .345E 12 | .329E 12 | .226E 12 |
| 1001.-1100. | .199E 12 | .168E 12 | .123E 12 | .876E 11 | .834E 11 | .760E 11 |
| 1101.-1200. | .186E 12 | .159E 12 | .117E 12 | .876E 11 | .833E 11 | .758E 11 |
| 1201.-1300. | .531E 11 | .456E 11 | .342E 11 | .266E 11 | .253E 11 | .230E 11 |
| 1301.-1400. | .100E 13 | .868E 12 | .659E 12 | .534E 12 | .507E 12 | .461E 12 |
| 1401.-1500. | .242E 12 | .210E 12 | .100E 12 | .134E 12 | .127E 12 | .715E 11 |
| 1501.-1600. | .380E 13 | .331E 13 | .755E 12 | .218E 13 | .207E 13 | .545E 12 |
| 1601.-1700. | .148E 12 | .130E 12 | .101E 12 | .887E 11 | .842E 11 | .731E 11 |
| 1701.-1800. | .138E 12 | .122E 12 | .237E 11 | .851E 11 | .808E 11 | .170E 11 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .200E 11 | .177E 11 | .141E 11 | .130E 11 | .123E 11 | .101E 11 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .850E 13 | .724E 13 | .315E 13 | .390E 13 | .370E 13 | .183E 13 |

SCC = 30400704--STEEL FOUNDRHEAT-TREATING FURNAC -NO CONTROL EQUIPMENT -TOT RECS = 141

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 19 | .377E 11 | .307E 11 | .202E 11 | .968E 10 | .921E 10 | .841E 10 |
| 32 | .924E 11 | .806E 11 | .0 | .528E 11 | .502E 11 | .0 |
| 33 | .754E 13 | .641E 13 | .305E 13 | .347E 13 | .329E 13 | .182E 13 |
| 34 | .410E 12 | .353E 12 | .724E 08 | .209E 12 | .199E 12 | .428E 08 |
| 35 | .724E 11 | .674E 11 | .440E 11 | .929E 09 | .882E 09 | .807E 09 |
| 37 | .349E 12 | .297E 12 | .299E 11 | .158E 12 | .151E 12 | .0 |
| 99 | .742E 09 | .696E 09 | .567E 09 | .0 | .0 | .0 |
| | .850E 13 | .724E 13 | .315E 13 | .390E 13 | .370E 13 | .183E 13 |

CC = 30400704--STEEL FOUNDR HEAT-TREATING FURNAC-- -NO CONTROL EQUIPMENT -SIC= ) -TOTAL RECS = 141

```
TEMP RANGE   COUNT

                       ----------------------------------------------------------------------------------------------------
   0.- 100.  .890E 11  !H
 101.- 200.  .200E 12  !H
 201.- 300.  .530E 11  !H
 301.- 400.  .106E 12  !H
 401.- 500.  .278E 12  !HH
 501.- 600.  .424E 12  !HHHH
 601.- 700.  .154E 12  !H
 701.- 800.  .192E 11  !H
 801.- 900.  .187E 12  !H
 901.-1000.  .707E 12  !HHHHHHH
1001.-1100.  .168E 12  !H
1101.-1200.  .159E 12  !H
1201.-1300.  .456E 11  !H
1301.-1400.  .868E 12  !HHHHHHHH
1401.-1500.  .210E 12  !HH
1501.-1600.  .331E 13  !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
1601.-1700.  .130E 12  !H
1701.-1800.  .122E 12  !H
1801.-1900.  .0        !
1901.-2000.  .177E 11  !H
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400704--STEEL FOUNDR HEAT-TREATING FURNAC -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 11

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .290E 11 | .272E 11 | .222E 11 | .0 | .0 | .0 |
| 101.- 200. | .101E 11 | .755E 10 | .372E 10 | .0 | .0 | .0 |
| 201.- 300. | .340E 13 | .256E 13 | .131E 13 | .0 | .0 | .0 |
| 301.- 400. | .422E 12 | .330E 12 | .0 | .314E 11 | .298E 11 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .386E 13 | .292E 13 | .134E 13 | .314E 11 | .298E 11 | .0 |

SCC = 30400704--STEEL FOUNDRHEAT-TREATING FURNAC -WITH CONTROL EQUIPMENT -TOT RECS = 11

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .342E 13 | .258E 13 | .133E 13 | .0 | .0 | .0 |
| 34 | .582E 10 | .440E 10 | .229E 10 | .0 | .0 | .0 |
| 35 | .431E 12 | .337E 12 | .552E 10 | .314E 11 | .298E 11 | .0 |
| | .386E 13 | .292E 13 | .134E 13 | .314E 11 | .298E 11 | .0 |

CC =30400704--STEEL FOUNDR HEAT-TREATING FURNAC---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 11

```
TEMP RANGE   COUNT
                      ----------------------------------------------------------------------------------------------------
   0.- 100.  .272E 11 !H
 101.- 200.  .755E 10 !H
 201.- 300.  .256E 13 !HHHHHHHHHHHHHHHHHHHHHHHHHH
 301.- 400.  .330E 12 !HHH
 401.- 500.  .0       !
 501.- 600.  .0       !
 601.- 700.  .0       !
 701.- 800.  .0       !
 801.- 900.  .0       !
 901.-1000.  .0       !
1001.-1100.  .0       !
1101.-1200.  .0       !
1201.-1300.  .0       !
1301.-1400.  .0       !
1401.-1500.  .0       !
1501.-1600.  .0       !
1601.-1700.  .0       !
1701.-1800.  .0       !
1801.-1900.  .0       !
1901.-2000.  .0       !
2001.-2100.  .0       !
2101.-2200.  .0       !
2201.-2300.  .0       !
2301.-2400.  .0       !
2401.-2500.  .0       !
2501.-2600.  .0       !
2601.-2700.  .0       !
2701.-2800.  .0       !
2801.-2900.  .0       !
2901.-3000.  .0       !
                      0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400704--STEEL FOUNDR HEAT-TREATING FURNAC -TOTAL SCC -SIC = 0 -TOT RECS = 152

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .124E 12 | .116E 12 | .795E 11 | .0 | .0 | .0 |
| 101.- 200. | .277E 12 | .207E 12 | .630E 11 | .0 | .0 | .0 |
| 201.- 300. | .347E 13 | .261E 13 | .134E 13 | .0 | .0 | .0 |
| 301.- 400. | .559E 12 | .436E 12 | .605E 11 | .381E 11 | .362E 11 | .582E 10 |
| 401.- 500. | .350E 12 | .278E 12 | .148E 12 | .505E 11 | .479E 11 | .394E 11 |
| 501.- 600. | .524E 12 | .424E 12 | .273E 12 | .119E 12 | .113E 12 | .103E 12 |
| 601.- 700. | .188E 12 | .154E 12 | .102E 12 | .500E 11 | .475E 11 | .434E 11 |
| 701.- 800. | .232E 11 | .192E 11 | .132E 11 | .767E 10 | .730E 10 | .667E 10 |
| 801.- 900. | .223E 12 | .187E 12 | .940E 11 | .849E 11 | .809E 11 | .526E 11 |
| 901.-1000. | .839E 12 | .707E 12 | .383E 12 | .345E 12 | .329E 12 | .226E 12 |
| 1001.-1100. | .199E 12 | .168E 12 | .123E 12 | .876E 11 | .834E 11 | .760E 11 |
| 1101.-1200. | .186E 12 | .159E 12 | .117E 12 | .876E 11 | .833E 11 | .758E 11 |
| 1201.-1300. | .531E 11 | .456E 11 | .342E 11 | .266E 11 | .253E 11 | .230E 11 |
| 1301.-1400. | .100E 13 | .868E 12 | .659E 12 | .534E 12 | .507E 12 | .461E 12 |
| 1401.-1500. | .242E 12 | .210E 12 | .100E 12 | .134E 12 | .127E 12 | .715E 11 |
| 1501.-1600. | .380E 13 | .331E 13 | .755E 12 | .218E 13 | .207E 13 | .545E 12 |
| 1601.-1700. | .148E 12 | .130E 12 | .101E 12 | .887E 11 | .842E 11 | .731E 11 |
| 1701.-1800. | .138E 12 | .122E 12 | .237E 11 | .851E 11 | .808E 11 | .170E 11 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .200E 11 | .177E 11 | .141E 11 | .130E 11 | .123E 11 | .101E 11 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .124E 14 | .102E 14 | .448E 13 | .393E 13 | .373E 13 | .183E 13 |

SCC = 30400704--STEEL FOUNDRHEAT-TREATING FURNAC -TOTAL SCC -TOT RECS = 152

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 19 | .377E 11 | .307E 11 | .202E 11 | .968E 10 | .921E 10 | .841E 10 |
| 32 | .924E 11 | .806E 11 | .0 | .528E 11 | .502E 11 | .0 |
| 33 | .110E 14 | .900E 13 | .438E 13 | .347E 13 | .329E 13 | .182E 13 |
| 34 | .415E 12 | .357E 12 | .236E 10 | .209E 12 | .199E 12 | .428E 08 |
| 35 | .504E 12 | .405E 12 | .495E 11 | .323E 11 | .307E 11 | .807E 09 |
| 37 | .349E 12 | .297E 12 | .299E 11 | .158E 12 | .151E 12 | .0 |
| 99 | .742E 09 | .696E 09 | .567E 09 | .0 | .0 | .0 |
| | .124E 14 | .102E 14 | .448E 13 | .393E 13 | .373E 13 | .183E 13 |

CC 30400704--STEEL FOUNDR HEAT-TREATING FURNAC--TOTAL SCC -SIC = 0 -TOT RECS = 152

```
EMP RANGE    COUNT

                        ----------------------------------------------------------------------------------------------------
   0.- 100.   .116E 12  !H
 101.- 200.   .207E 12  !HH
 201.- 300.   .261E 13  !HHHHHHHHHHHHHHHHHHHHHHHHHHH
 301.- 400.   .436E 12  !HHHH
 401.- 500.   .278E 12  !HH
 501.- 600.   .424E 12  !HHHH
 601.- 700.   .154E 12  !H
 701.- 800.   .192E 11  !H
 801.- 900.   .187E 12  !H
 901.-1000.   .707E 12  !HHHHHHH
1001.-1100.   .168E 12  !H
1101.-1200.   .159E 12  !H
1201.-1300.   .456E 11  !H
1301.-1400.   .868E 12  !HHHHHHHH
1401.-1500.   .210E 12  !HH
1501.-1600.   .331E 13  !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
1601.-1700.   .130E 12  !H
1701.-1800.   .122E 12  !H
1801.-1900.   .0        !
1901.-2000.   .177E 11  !H
2001.-2100.   .0        !
2101.-2200.   .0        !
2201.-2300.   .0        !
2301.-2400.   .0        !
2401.-2500.   .0        !
2501.-2600.   .0        !
2601.-2700.   .0        !
2701.-2800.   .0        !
2801.-2900.   .0        !
2901.-3000.   .0        !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400705--STEEL FOUNDR ELECTRIC INDUCTION F -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 9

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .535E 11 | .501E 11 | .409E 11 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .307E 11 | .259E 11 | .185E 11 | .126E 11 | .120E 11 | .110E 11 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .841E 11 | .760E 11 | .594E 11 | .126E 11 | .120E 11 | .110E 11 |

SCC = 30400705--STEEL FOUNDRELECTRIC INDUCTION F -NO CONTROL EQUIPMENT -TOT RECS = 9

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .307E 11 | .259E 11 | .185E 11 | .126E 11 | .120E 11 | .110E 11 |
| 35 | .535E 11 | .501E 11 | .409E 11 | .0 | .0 | .0 |
| | .841E 11 | .760E 11 | .594E 11 | .126E 11 | .120E 11 | .110E 11 |

CC = 30400705--STEEL FOUNDR ELECTRIC INDUCTION F-- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 9

```
TEMP RANGE   COUNT

                       ------------------------------------------------------------------------------------------------------
   0.- 100.  .501E 11  !H
 101.- 200.  .0        !
 201.- 300.  .0        !
 301.- 400.  .0        !
 401.- 500.  .0        !
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .259E 11  !H
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400705--STEEL FOUNDR ELECTRIC INDUCTION F -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 4

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .758E 11 | .666E 11 | .133E 11 | .462E 11 | .438E 11 | .957E 10 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .758E 11 | .666E 11 | .133E 11 | .462E 11 | .438E 11 | .957E 10 |

SCC = 30400705--STEEL FOUNDRELECTRIC INDUCTION F -WITH CONTROL EQUIPMENT -TOT RECS = 4

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .758E 11 | .666E 11 | .133E 11 | .462E 11 | .438E 11 | .957E 10 |
| | .758E 11 | .666E 11 | .133E 11 | .462E 11 | .438E 11 | .957E 10 |

CC =30400705--STEEL FOUNDR ELECTRIC INDUCTION F---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 4

| TEMP RANGE | COUNT |
|---|---|
| 0.- 100. | .0 |
| 101.- 200. | .0 |
| 201.- 300. | .0 |
| 301.- 400. | .0 |
| 401.- 500. | .0 |
| 501.- 600. | .0 |
| 601.- 700. | .0 |
| 701.- 800. | .0 |
| 801.- 900. | .0 |
| 901.-1000. | .0 |
| 1001.-1100. | .0 |
| 1101.-1200. | .0 |
| 1201.-1300. | .0 |
| 1301.-1400. | .0 |
| 1401.-1500. | .0 |
| 1501.-1600. | .0 |
| 1601.-1700. | .0 |
| 1701.-1800. | .666E 11 |
| 1801.-1900. | .0 |
| 1901.-2000. | .0 |
| 2001.-2100. | .0 |
| 2101.-2200. | .0 |
| 2201.-2300. | .0 |
| 2301.-2400. | .0 |
| 2401.-2500. | .0 |
| 2501.-2600. | .0 |
| 2601.-2700. | .0 |
| 2701.-2800. | .0 |
| 2801.-2900. | .0 |
| 2901.-3000. | .0 |

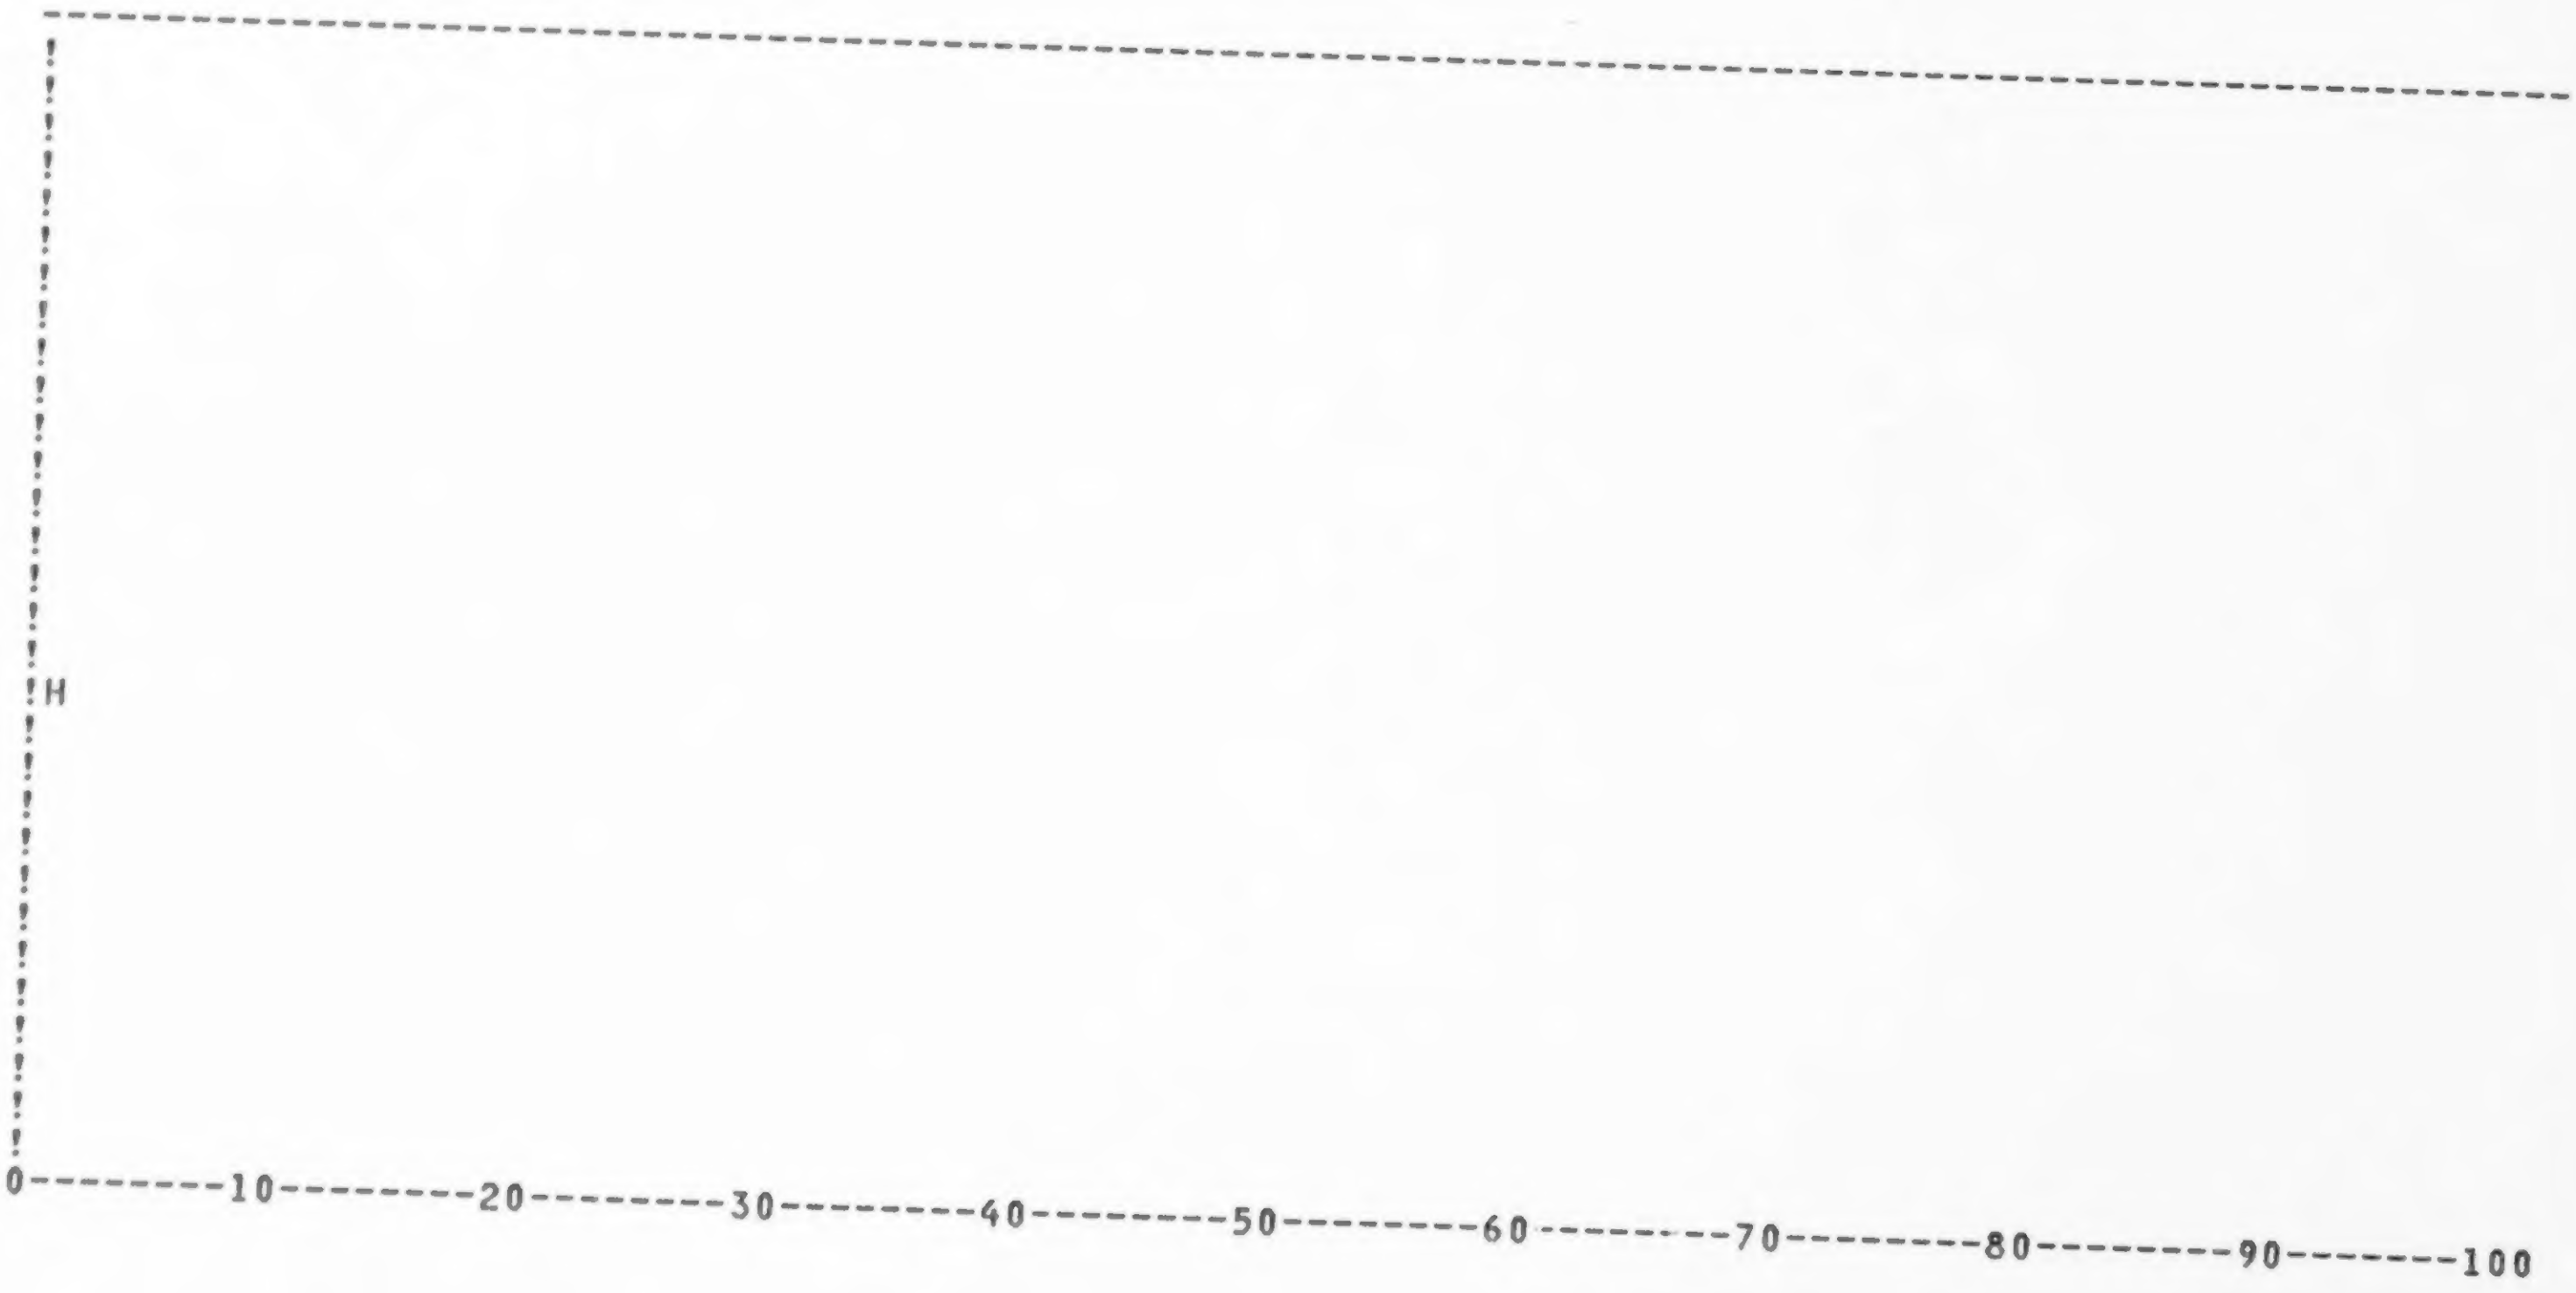

SCC= 30400705--STEEL FOUNDR ELECTRIC INDUCTION F -TOTAL SCC -SIC = 0 -TOT RECS = 13

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .535E 11 | .501E 11 | .409E 11 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .307E 11 | .259E 11 | .185E 11 | .126E 11 | .120E 11 | .110E 11 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .758E 11 | .666E 11 | .133E 11 | .462E 11 | .438E 11 | .957E 10 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .160E 12 | .143E 12 | .727E 11 | .588E 11 | .558E 11 | .205E 11 |

SCC = 30400705--STEEL FOUNDRELECTRIC INDUCTION F -TOTAL SCC -TOT RECS = 13

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .106E 12 | .924E 11 | .319E 11 | .588E 11 | .558E 11 | .205E 11 |
| 35 | .535E 11 | .501E 11 | .409E 11 | .0 | .0 | .0 |
| | .160E 12 | .143E 12 | .727E 11 | .588E 11 | .558E 11 | .205E 11 |

CC 30400705--STEEL FOUNDR ELECTRIC INDUCTION F--TOTAL SCC -SIC = 0 -TOT RECS = 13

```
EMP RANGE   COUNT

                        -----------------------------------------------------------------------------------------------------
    0.- 100.  .501E 11  !H
  101.- 200.  .0        !
  201.- 300.  .0        !
  301.- 400.  .0        !
  401.- 500.  .0        !
  501.- 600.  .0        !
  601.- 700.  .0        !
  701.- 800.  .0        !
  801.- 900.  .0        !
  901.-1000.  .259E 11  !H
 1001.-1100.  .0        !
 1101.-1200.  .0        !
 1201.-1300.  .0        !
 1301.-1400.  .0        !
 1401.-1500.  .0        !
 1501.-1600.  .0        !
 1601.-1700.  .0        !
 1701.-1800.  .666E 11  !H
 1801.-1900.  .0        !
 1901.-2000.  .0        !
 2001.-2100.  .0        !
 2101.-2200.  .0        !
 2201.-2300.  .0        !
 2301.-2400.  .0        !
 2401.-2500.  .0        !
 2501.-2600.  .0        !
 2601.-2700.  .0        !
 2701.-2800.  .0        !
 2801.-2900.  .0        !
 2901.-3000.  .0        !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400706--STEEL FOUNDR SAND GRINDING AND HA -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 8

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .104E 12 | .975E 11 | .437E 11 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .104E 12 | .975E 11 | .437E 11 | .0 | .0 | .0 |

SCC = 30400706--STEEL FOUNDRSAND GRINDING AND HA -NO CONTROL EQUIPMENT -TOT RECS = 8

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .106E 11 | .994E 10 | .211E 09 | .0 | .0 | .0 |
| 35 | .672E 11 | .630E 11 | .435E 11 | .0 | .0 | .0 |
| 37 | .262E 11 | .245E 11 | .0 | .0 | .0 | .0 |
| | .104E 12 | .975E 11 | .437E 11 | .0 | .0 | .0 |

CC = 30400706--STEEL FOUNDR SAND GRINDING AND HA-- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 8

```
TEMP RANGE    COUNT
                      ---------------------------------------------------------------------------------------------------
   0.- 100.  .975E 11 !H
 101.- 200.  .0       !
 201.- 300.  .0       !
 301.- 400.  .0       !
 401.- 500.  .0       !
 501.- 600.  .0       !
 601.- 700.  .0       !
 701.- 800.  .0       !
 801.- 900.  .0       !
 901.-1000.  .0       !
1001.-1100.  .0       !
1101.-1200.  .0       !
1201.-1300.  .0       !
1301.-1400.  .0       !
1401.-1500.  .0       !
1501.-1600.  .0       !
1601.-1700.  .0       !
1701.-1800.  .0       !
1801.-1900.  .0       !
1901.-2000.  .0       !
2001.-2100.  .0       !
2101.-2200.  .0       !
2201.-2300.  .0       !
2301.-2400.  .0       !
2401.-2500.  .0       !
2501.-2600.  .0       !
2601.-2700.  .0       !
2701.-2800.  .0       !
2801.-2900.  .0       !
2901.-3000.  .0       !
                      0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400706--STEEL FOUNDR SAND GRINDING AND HA -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 63

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .436E 12 | .409E 12 | .231E 12 | .0 | .0 | .0 |
| 101.- 200. | .586E 11 | .550E 11 | .314E 11 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .495E 12 | .464E 12 | .262E 12 | .0 | .0 | .0 |

SCC = 30400706--STEEL FOUNDRSAND GRINDING AND HA -WITH CONTROL EQUIPMENT -TOT RECS = 63

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .353E 12 | .331E 12 | .196E 12 | .0 | .0 | .0 |
| 34 | .370E 11 | .347E 11 | .489E 10 | .0 | .0 | .0 |
| 35 | .715E 11 | .671E 11 | .421E 11 | .0 | .0 | .0 |
| 37 | .246E 11 | .231E 11 | .188E 11 | .0 | .0 | .0 |
| 99 | .891E 10 | .836E 10 | .0 | .0 | .0 | .0 |
| | .495E 12 | .464E 12 | .262E 12 | .0 | .0 | .0 |

CC =30400706--STEEL FOUNDR SAND GRINDING AND HA---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 63

```
                          ------------------------------------------------------------------------------------------------------
   0.- 100.  .409E 12   !HHHH
 101.- 200.  .550E 11   !H
 201.- 300.  .0         !
 301.- 400.  .0         !
 401.- 500.  .0         !
 501.- 600.  .0         !
 601.- 700.  .0         !
 701.- 800.  .0         !
 801.- 900.  .0         !
 901.-1000.  .0         !
1001.-1100.  .0         !
1101.-1200.  .0         !
1201.-1300.  .0         !
1301.-1400.  .0         !
1401.-1500.  .0         !
1501.-1600.  .0         !
1601.-1700.  .0         !
1701.-1800.  .0         !
1801.-1900.  .0         !
1901.-2000.  .0         !
2001.-2100.  .0         !
2101.-2200.  .0         !
2201.-2300.  .0         !
2301.-2400.  .0         !
2401.-2500.  .0         !
2501.-2600.  .0         !
2601.-2700.  .0         !
2701.-2800.  .0         !
2801.-2900.  .0         !
2901.-3000.  .0         !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400706--STEEL FOUNDR SAND GRINDING AND HA -TOTAL SCC -SIC = 0 -TOT RECS = 71

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .540E 12 | .507E 12 | .274E 12 | .0 | .0 | .0 |
| 101.- 200. | .586E 11 | .550E 11 | .314E 11 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .599E 12 | .562E 12 | .306E 12 | .0 | .0 | .0 |

SCC = 30400706--STEEL FOUNDRSAND GRINDING AND HA -TOTAL SCC -TOT RECS = 71

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .364E 12 | .341E 12 | .196E 12 | .0 | .0 | .0 |
| 34 | .370E 11 | .347E 11 | .489E 10 | .0 | .0 | .0 |
| 35 | .139E 12 | .130E 12 | .856E 11 | .0 | .0 | .0 |
| 37 | .508E 11 | .477E 11 | .188E 11 | .0 | .0 | .0 |
| 99 | .891E 10 | .836E 10 | .0 | .0 | .0 | .0 |
| | .599E 12 | .562E 12 | .306E 12 | .0 | .0 | .0 |

CC 30400706--STEEL FOUNDR SAND GRINDING AND HA--TOTAL SCC -SIC = 0 -TOT RECS = 71

```
EMP RANGE      COUNT
                          ----------------------------------------------------------------------------------------------------
    0.- 100.   .597E 12   !HHHHHH
  101.- 200.   .550E 11   !H
  201.- 300.   .0         !
  301.- 400.   .0         !
  401.- 500.   .0         !
  501.- 600.   .0         !
  601.- 700.   .0         !
  701.- 800.   .0         !
  801.- 900.   .0         !
  901.-1000.   .0         !
 1001.-1100.   .0         !
 1101.-1200.   .0         !
 1201.-1300.   .0         !
 1301.-1400.   .0         !
 1401.-1500.   .0         !
 1501.-1600.   .0         !
 1601.-1700.   .0         !
 1701.-1800.   .0         !
 1801.-1900.   .0         !
 1901.-2000.   .0         !
 2001.-2100.   .0         !
 2101.-2200.   .0         !
 2201.-2300.   .0         !
 2301.-2400.   .0         !
 2401.-2500.   .0         !
 2501.-2600.   .0         !
 2601.-2700.   .0         !
 2701.-2800.   .0         !
 2801.-2900.   .0         !
 2901.-3000.   .0         !
                          0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400710--STEEL FOUNDR FINISHING AND SOAKIN -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 3

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .781E 10 | .583E 10 | .0 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .452E 11 | .397E 11 | .158E 11 | .276E 11 | .262E 11 | .113E 11 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .530E 11 | .455E 11 | .158E 11 | .276E 11 | .262E 11 | .113E 11 |

SCC = 30400711--STEEL FOUNDRFINISHING AND SOAKIN -NO CONTROL EQUIPMENT -TOT RECS = 3

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .530E 11 | .455E 11 | .158E 11 | .276E 11 | .262E 11 | .113E 11 |
| | .530E 11 | .455E 11 | .158E 11 | .276E 11 | .262E 11 | .113E 11 |

CC = 30400710--STEEL FOUNDR FINISHING AND SOAKIN-- -NO CONTROL EQUIPMENT -SIC= ) -TOTAL RECS = 3

| TEMP RANGE | COUNT | |
|---|---|---|
| 0.- 100. | .0 | |
| 101.- 200. | .583E 10 | H |
| 201.- 300. | .0 | |
| 301.- 400. | .0 | |
| 401.- 500. | .0 | |
| 501.- 600. | .0 | |
| 601.- 700. | .0 | |
| 701.- 800. | .0 | |
| 801.- 900. | .0 | |
| 901.-1000. | .0 | |
| 1001.-1100. | .0 | |
| 1101.-1200. | .0 | |
| 1201.-1300. | .0 | |
| 1301.-1400. | .0 | |
| 1401.-1500. | .0 | |
| 1501.-1600. | .0 | |
| 1601.-1700. | .0 | |
| 1701.-1800. | .397E 11 | H |
| 1801.-1900. | .0 | |
| 1901.-2000. | .0 | |
| 2001.-2100. | .0 | |
| 2101.-2200. | .0 | |
| 2201.-2300. | .0 | |
| 2301.-2400. | .0 | |
| 2401.-2500. | .0 | |
| 2501.-2600. | .0 | |
| 2601.-2700. | .0 | |
| 2701.-2800. | .0 | |
| 2801.-2900. | .0 | |
| 2901.-3000. | .0 | |

0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100

SCC= 30100710--STEEL FOUNDR FINISHING AND SOAKIN -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 0

| | | | | | | |
|---|---|---|---|---|---|---|
| TEMP | MAXIMUM | EXPECTED | MINIMUM | MAXIMUM | EXPECTED | MINIMUM |
| | 60 DEG | 60 DEG | 60 DEG | 300 DEG | 300 DEG | 300 DEG |

0 RECORDS FOR THIS SECTION OF SCC

SCC = 30400710--STEEL FOUNDRFINISHING AND SOAKIN -WITH CONTROL EQUIPMENT -TOT RECS = 0

| SIC | MAXIMUM | EXPECTED | MINIMUM | MAXIMUM | EXPECTED | MINIMUM |
|---|---|---|---|---|---|---|
| | 60 DEG | 60 DEG | 60 DEG | 300DEG | 300 DEG | 300 DEG |

SCC= 30400715--STEEL FOUNDR FINISHING/NOT CLASSI -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 1

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .283E 09 | .266E 09 | .217E 09 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .283E 09 | .266E 09 | .217E 09 | .0 | .0 | .0 |

SCC = 30400719--STEEL FOUNDRFINISHING/NOT CLASSI -NO CONTROL EQUIPMENT -TOT RECS = 1

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .283E 09 | .266E 09 | .217E 09 | .0 | .0 | .0 |
| | .283E 09 | .266E 09 | .217E 09 | .0 | .0 | .0 |

CE = 30400719--STEEL FOUNDR FINISHING/NOT CLASSI-- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 1

| TEMP RANGE | COUNT |
|---|---|
| 0.- 100. | .266E 09 |
| 101.- 200. | .0 |
| 201.- 300. | .0 |
| 301.- 400. | .0 |
| 401.- 500. | .0 |
| 501.- 600. | .0 |
| 601.- 700. | .0 |
| 701.- 800. | .0 |
| 801.- 900. | .0 |
| 901.-1000. | .0 |
| 1001.-1100. | .0 |
| 1101.-1200. | .0 |
| 1201.-1300. | .0 |
| 1301.-1400. | .0 |
| 1401.-1500. | .0 |
| 1501.-1600. | .0 |
| 1601.-1700. | .0 |
| 1701.-1800. | .0 |
| 1801.-1900. | .0 |
| 1901.-2000. | .0 |
| 2001.-2100. | .0 |
| 2101.-2200. | .0 |
| 2201.-2300. | .0 |
| 2301.-2400. | .0 |
| 2401.-2500. | .0 |
| 2501.-2600. | .0 |
| 2601.-2700. | .0 |
| 2701.-2800. | .0 |
| 2801.-2900. | .0 |
| 2901.-3000. | .0 |

0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100

SCC= 30400715--STEEL FOUNDR FINISHING/NOT CLASSI -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 15

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .140E 12 | .139E 12 | .107E 12 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .140E 12 | .139E 12 | .107E 12 | .0 | .0 | .0 |

SCC = 30400715--STEEL FOUNDRFINISHING/NOT CLASSI -WITH CONTROL EQUIPMENT -TOT RECS = 15

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .770E 11 | .722E 11 | .523E 11 | .0 | .0 | .0 |
| 34 | .140E 11 | .132E 11 | .107E 11 | .0 | .0 | .0 |
| 35 | .143E 11 | .134E 11 | .109E 11 | .0 | .0 | .0 |
| 37 | .428E 11 | .402E 11 | .327E 11 | .0 | .0 | .0 |
| | .148E 12 | .139E 12 | .107E 12 | .0 | .0 | .0 |

CC =30400715--STEEL FOUNDR FINISHING/NOT CLASSI---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 15

```
TEMP RANGE   COUNT
                        ------------------------------------------------------------------------------------------------------
    0.- 100.  .139E 12  IM
  101.- 200.  .0        I
  201.- 300.  .0        I
  301.- 400.  .0        I
  401.- 500.  .0        I
  501.- 600.  .0        I
  601.- 700.  .0        I
  701.- 800.  .0        I
  801.- 900.  .0        I
  901.-1000.  .0        I
 1001.-1100.  .0        I
 1101.-1200.  .0        I
 1201.-1300.  .0        I
 1301.-1400.  .0        I
 1401.-1500.  .0        I
 1501.-1600.  .0        I
 1601.-1700.  .0        I
 1701.-1800.  .0        I
 1801.-1900.  .0        I
 1901.-2000.  .0        I
 2001.-2100.  .0        I
 2101.-2200.  .0        I
 2201.-2300.  .0        I
 2301.-2400.  .0        I
 2401.-2500.  .0        I
 2501.-2600.  .0        I
 2601.-2700.  .0        I
 2701.-2800.  .0        I
 2801.-2900.  .0        I
 2901.-3000.  .0        I
                        0---------10---------20---------30---------40---------50---------60---------70---------80---------90---------100
```

SCC= 30400715--STEEL FOUNDR FINISHING/NOT CLASSI -TOTAL SCC -SIC = 0 -TOT RECS = 16

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .148E 12 | .139E 12 | .107E 12 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .148E 12 | .139E 12 | .107E 12 | .0 | .0 | .0 |

SCC = 30400715--STEEL FOUNDRFINISHING/NOT CLASSI -TOTAL SCC -TOT RECS = 15

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .772E 11 | .725E 11 | .525E 11 | .0 | .0 | .0 |
| 34 | .140E 11 | .132E 11 | .107E 11 | .0 | .0 | .0 |
| 35 | .143E 11 | .134E 11 | .109E 11 | .0 | .0 | .0 |
| 37 | .428E 11 | .402E 11 | .327E 11 | .0 | .0 | .0 |
| | .148E 12 | .139E 12 | .107E 12 | .0 | .0 | .0 |

CC 30400715--STEEL FOUNDR FINISHING/NOT CLASSI--TOTAL SCC -SIC = 0 -TOT RECS = 16

| EMP RANGE | COUNT |
|---|---|
| 0.- 100. | .139E 12 |
| 101.- 200. | .0 |
| 201.- 300. | .0 |
| 301.- 400. | .0 |
| 401.- 500. | .0 |
| 501.- 600. | .0 |
| 601.- 700. | .0 |
| 701.- 800. | .0 |
| 801.- 900. | .0 |
| 901.-1000. | .0 |
| 1001.-1100. | .0 |
| 1101.-1200. | .0 |
| 1201.-1300. | .0 |
| 1301.-1400. | .0 |
| 1401.-1500. | .0 |
| 1501.-1600. | .0 |
| 1601.-1700. | .0 |
| 1701.-1800. | .0 |
| 1801.-1900. | .0 |
| 1901.-2000. | .0 |
| 2001.-2100. | .0 |
| 2101.-2200. | .0 |
| 2201.-2300. | .0 |
| 2301.-2400. | .0 |
| 2401.-2500. | .0 |
| 2501.-2600. | .0 |
| 2601.-2700. | .0 |
| 2701.-2800. | .0 |
| 2801.-2900. | .0 |
| 2901.-3000. | .0 |

SCC= 30400799--STEEL FOUNDR OTHER/NOT CLASSIFIED -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 125

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .184E 12 | .172E 12 | .990E 11 | .0 | .0 | .0 |
| 101.- 200. | .636E 12 | .504E 12 | .239E 12 | .0 | .0 | .0 |
| 201.- 300. | .327E 12 | .249E 12 | .437E 11 | .0 | .0 | .0 |
| 301.- 400. | .214E 13 | .166E 13 | .424E 12 | .119E 12 | .113E 12 | .597E 11 |
| 401.- 500. | .210E 12 | .166E 12 | .163E 11 | .234E 11 | .222E 11 | .313E 10 |
| 501.- 600. | .588E 12 | .476E 12 | .514E 11 | .133E 12 | .126E 12 | .198E 11 |
| 601.- 700. | .112E 13 | .913E 12 | .543E 12 | .292E 12 | .277E 12 | .227E 12 |
| 701.- 800. | .242E 12 | .200E 12 | .136E 12 | .761E 11 | .724E 11 | .662E 11 |
| 801.- 900. | .336E 12 | .281E 12 | .199E 12 | .128E 12 | .122E 12 | .111E 12 |
| 901.-1000. | .393E 12 | .332E 12 | .238E 12 | .162E 12 | .154E 12 | .141E 12 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .942E 11 | .804E 11 | .594E 11 | .444E 11 | .422E 11 | .384E 11 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .109E 11 | .945E 10 | .722E 10 | .596E 10 | .567E 10 | .515E 10 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .628E 13 | .504E 13 | .206E 13 | .984E 12 | .936E 12 | .672E 12 |

SCC = 30400799--STEEL FOUNDROTHER/NOT CLASSIFIED -NO CONTROL EQUIPMENT -TOT RECS = 125

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .603E 13 | .484E 13 | .200E 13 | .975E 12 | .927E 12 | .666E 12 |
| 34 | .172E 12 | .133E 12 | .877E 10 | .326E 10 | .310E 10 | .287E 09 |
| 35 | .541E 11 | .506E 11 | .411E 11 | .0 | .0 | .0 |
| 36 | .109E 11 | .945E 10 | .722E 10 | .596E 10 | .567E 10 | .515E 10 |
| 37 | .168E 11 | .158E 11 | .355E 10 | .0 | .0 | .0 |
| | .628E 13 | .504E 13 | .206E 13 | .984E 12 | .936E 12 | .672E 12 |

CC = 30400799--STEEL FOUNDR OTHER/NOT CLASSIFIED-- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 125

```
TEMP RANGE   COUNT
                   ---------------------------------------------------------------------------------------------------
   0.- 100.  .172E 12  !H
 101.- 200.  .504E 12  !HHHHH
 201.- 300.  .249E 12  !HH
 301.- 400.  .166E 13  !HHHHHHHHHHHHHHHH
 401.- 500.  .166E 12  !H
 501.- 600.  .476E 12  !HHHH
 601.- 700.  .913E 12  !HHHHHHHHH
 701.- 800.  .200E 12  !H
 801.- 900.  .281E 12  !HH
 901.-1000.  .332E 12  !HHH
1001.-1100.  .0        !
1101.-1200.  .804E 11  !H
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .945E 10  !H
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400799--STEEL FOUNDR OTHER/NOT CLASSIFIED -WITH CONTROL EQUIPMENT -SIC = ) -TOT RECS = 118

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .636E 12 | .597E 12 | .276E 12 | .0 | .0 | .0 |
| 101.- 200. | .115E 12 | .929E 11 | .482E 11 | .0 | .0 | .0 |
| 201.- 300. | .323E 12 | .243E 12 | .895E 11 | .0 | .0 | .0 |
| 301.- 400. | .115E 12 | .895E 11 | .337E 10 | .813E 10 | .772E 10 | .164E 09 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .289E 10 | .243E 10 | .173E 10 | .115E 10 | .109E 10 | .997E 09 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .113E 11 | .980E 10 | .744E 10 | .603E 10 | .573E 10 | .521E 10 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .120E 13 | .103E 13 | .426E 12 | .153E 11 | .145E 11 | .637E 10 |

SCC = 30400799--STEEL FOUNDROTHER/NOT CLASSIFIED -WITH CONTROL EQUIPMENT -TOT RECS = 118

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .996E 12 | .841E 12 | .326E 12 | .925E 10 | .879E 10 | .114E 10 |
| 34 | .124E 12 | .116E 12 | .727E 11 | .606E 10 | .576E 10 | .523E 10 |
| 35 | .409E 11 | .384E 11 | .207E 11 | .0 | .0 | .0 |
| 37 | .155E 11 | .145E 11 | .0 | .0 | .0 | .0 |
| 99 | .267E 11 | .251E 11 | .641E 10 | .0 | .0 | .0 |
| | .120E 13 | .103E 13 | .426E 12 | .153E 11 | .145E 11 | .637E 10 |

CC =30400799--STEEL FOUNDR OTHER/NOT CLASSIFIED---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 118

```
TEMP RANGE   COUNT
                      ------------------------------------------------------------------------------------------------------
   0.- 100.  .597E 12  !HHHHH
 101.- 200.  .929E 11  !H
 201.- 300.  .243E 12  !HH
 301.- 400.  .895E 11  !H
 401.- 500.  .0        !
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .243E 10  !H
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .980E 10  !H
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400799--STEEL FOUNDR OTHER/NOT CLASSIFIED -TOTAL SCC -SIC = 0 -TOT RECS :: 243

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .820E 12 | .769E 12 | .375E 12 | .0 | .0 | .0 |
| 101.- 200. | .752E 12 | .597E 12 | .287E 12 | .0 | .0 | .0 |
| 201.- 300. | .650E 12 | .492E 12 | .133E 12 | .0 | .0 | .0 |
| 301.- 400. | .225E 13 | .175E 13 | .428E 12 | .127E 12 | .121E 12 | .599E 11 |
| 401.- 500. | .210E 12 | .166E 12 | .163E 11 | .234E 11 | .222E 11 | .313E 10 |
| 501.- 600. | .588E 12 | .476E 12 | .514E 11 | .133E 12 | .126E 12 | .198E 11 |
| 601.- 700. | .112E 13 | .913E 12 | .543E 12 | .292E 12 | .277E 12 | .227E 12 |
| 701.- 800. | .242E 12 | .200E 12 | .136E 12 | .761E 11 | .724E 11 | .662E 11 |
| 801.- 900. | .336E 12 | .281E 12 | .199E 12 | .128E 12 | .122E 12 | .111E 12 |
| 901.-1000. | .396E 12 | .334E 12 | .240E 12 | .163E 12 | .155E 12 | .142E 12 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .942E 11 | .804E 11 | .594E 11 | .444E 11 | .422E 11 | .384E 11 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .113E 11 | .980E 10 | .744E 10 | .603E 10 | .573E 10 | .521E 10 |
| 1401.-1500. | .109E 11 | .945E 10 | .722E 10 | .596E 10 | .567E 10 | .515E 10 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .749E 13 | .608E 13 | .248E 13 | .999E 12 | .950E 12 | .678E 12 |

SCC = 30400799--STEEL FOUNDROTHER/NOT CLASSIFIED -TOTAL SCC -TOT RECS = 243

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .702E 13 | .568E 13 | .232E 13 | .984E 12 | .936E 12 | .667E 12 |
| 34 | .296E 12 | .249E 12 | .815E 11 | .932E 10 | .885E 10 | .552E 10 |
| 35 | .950E 11 | .890E 11 | .618E 11 | .0 | .0 | .0 |
| 36 | .109E 11 | .945E 10 | .722E 10 | .596E 10 | .567E 10 | .515E 10 |
| 37 | .323E 11 | .303E 11 | .355E 10 | .0 | .0 | .0 |
| 99 | .267E 11 | .251E 11 | .641E 10 | .0 | .0 | .0 |
| | .749E 13 | .608E 13 | .248E 13 | .999E 12 | .950E 12 | .678E 12 |

CC 30400799--STEEL FOUNDR OTHER/NOT CLASSIFIED--TOTAL SCC -SIC = 0 -TOT RECS = 243

```
EMP RANGE    COUNT
                        -----------------------------------------------------------------------------------------------------
   0.- 100.  .769E 12  !HHHHHHH
 101.- 200.  .597E 12  !HHHHH
 201.- 300.  .492E 12  !HHHH
 301.- 400.  .175E 13  !HHHHHHHHHHHHHHHHH
 401.- 500.  .166E 12  !H
 501.- 600.  .476E 12  !HHHH
 601.- 700.  .913E 12  !HHHHHHHHH
 701.- 800.  .200E 12  !H
 801.- 900.  .281E 12  !HH
 901.-1000.  .334E 12  !HHH
1001.-1100.  .0        !
1101.-1200.  .804E 11  !H
1201.-1300.  .0        !
1301.-1400.  .980E 10  !H
1401.-1500.  .945E 10  !H
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400801--ZINC SEC RETORT FURNACE -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 3

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .104E 12 | .779E 11 | .382E 11 | .0 | .0 | .0 |
| 201.- 300. | .113E 12 | .852E 11 | .0 | .0 | .0 | .0 |
| 301.- 400. | .122E 12 | .937E 11 | .0 | .222E 10 | .211E 10 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .339E 12 | .257E 12 | .382E 11 | .222E 10 | .211E 10 | .0 |

SCC = 30400801--ZINC SEC RETORT FURNACE -NO CONTROL EQUIPMENT -TOT RECS = 3

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .104E 12 | .779E 11 | .382E 11 | .0 | .0 | .0 |
| 33 | .234E 12 | .179E 12 | .0 | .222E 10 | .211E 10 | .0 |
| | .339E 12 | .257E 12 | .382E 11 | .222E 10 | .211E 10 | .0 |

CC = 30400801--ZINC SEC RETORT FURNACE -- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 3

```
TEMP RANGE   COUNT
                     -------------------------------------------------------------------------------------------------------
   0.- 100.  .0        !
 101.- 200.  .779E 11  !H
 201.- 300.  .852E 11  !H
 301.- 400.  .937E 11  !H
 401.- 500.  .0        !
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400801--ZINC SEC RETORT FURNACE -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 2

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .889E 11 | .663E 11 | .164E 11 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .889E 11 | .663E 11 | .164E 11 | .0 | .0 | .0 |

SCC = 30400801--ZINC SEC RETORT FURNACE -WITH CONTROL EQUIPMENT -TOT RECS = 2

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .889E 11 | .663E 11 | .164E 11 | .0 | .0 | .0 |
| | .889E 11 | .663E 11 | .164E 11 | .0 | .0 | .0 |

CC =30400801--ZINC SEC RETORT FURNACE ---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 2

```
TEMP RANGE   COUNT
                         ------------------------------------------------------------------------------------------------------
   0.- 100.  .0          !
 101.- 200.  .663E 11    !H
 201.- 300.  .0          !
 301.- 400.  .0          !
 401.- 500.  .0          !
 501.- 600.  .0          !
 601.- 700.  .0          !
 701.- 800.  .0          !
 801.- 900.  .0          !
 901.-1000.  .0          !
1001.-1100.  .0          !
1101.-1200.  .0          !
1201.-1300.  .0          !
1301.-1400.  .0          !
1401.-1500.  .0          !
1501.-1600.  .0          !
1601.-1700.  .0          !
1701.-1800.  .0          !
1801.-1900.  .0          !
1901.-2000.  .0          !
2001.-2100.  .0          !
2101.-2200.  .0          !
2201.-2300.  .0          !
2301.-2400.  .0          !
2401.-2500.  .0          !
2501.-2600.  .0          !
2601.-2700.  .0          !
2701.-2800.  .0          !
2801.-2900.  .0          !
2901.-3000.  .0          !
                         0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400801--ZINC SEC RETORT FURNACE -TOTAL SCC -SIC = 0 -TOT RECS = 5

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .193E 12 | .144E 12 | .547E 11 | .0 | .0 | .0 |
| 201.- 300. | .113E 12 | .852E 11 | .0 | .0 | .0 | .0 |
| 301.- 400. | .122E 12 | .937E 11 | .0 | .222E 10 | .211E 10 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .427E 12 | .323E 12 | .547E 11 | .222E 10 | .211E 10 | .0 |

SCC = 30400801--ZINC SEC RETORT FURNACE -TOTAL SCC -TOT RECS = 5

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .104E 12 | .779E 11 | .382E 11 | .0 | .0 | .0 |
| 33 | .323E 12 | .245E 12 | .164E 11 | .222E 10 | .211E 10 | .0 |
| | .427E 12 | .323E 12 | .547E 11 | .222E 10 | .211E 10 | .0 |

CC 30400801--ZINC SEC RETORT FURNACE --TOTAL SCC -SIC = 0 -TOT RECS = 5

```
EMP RANGE   COUNT
                      -----------------------------------------------------------------------------------------------------
   0.- 100.   .0       !
 101.- 200.   .144E 12 !H
 201.- 300.   .852E 11 !H
 301.- 400.   .937E 11 !H
 401.- 500.   .0       !
 501.- 600.   .0       !
 601.- 700.   .0       !
 701.- 800.   .0       !
 801.- 900.   .0       !
 901.-1000.   .0       !
1001.-1100.   .0       !
1101.-1200.   .0       !
1201.-1300.   .0       !
1301.-1400.   .0       !
1401.-1500.   .0       !
1501.-1600.   .0       !
1601.-1700.   .0       !
1701.-1800.   .0       !
1801.-1900.   .0       !
1901.-2000.   .0       !
2001.-2100.   .0       !
2101.-2200.   .0       !
2201.-2300.   .0       !
2301.-2400.   .0       !
2401.-2500.   .0       !
2501.-2600.   .0       !
2601.-2700.   .0       !
2701.-2800.   .0       !
2801.-2900.   .0       !
2901.-3000.   .0       !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400802--ZINC SEC HORIZONTAL MUFFLE FU -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 5

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .445E 11 | .398E 11 | .322E 11 | .339E 11 | .299E 11 | .307E 11 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .445E 11 | .398E 11 | .322E 11 | .339E 11 | .299E 11 | .307E 11 |

SCC = 30400802--ZINC SEC    HORIZONTAL MUFFLE FU -NO CONTROL EQUIPMENT -TOT RECS =    5

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .445E 11 | .398E 11 | .322E 11 | .339E 11 | .299E 11 | .307E 11 |
| | .445E 11 | .398E 11 | .322E 11 | .339E 11 | .299E 11 | .307E 11 |

CC = 30400802--ZINC SEC    HORIZONTAL MUFFLE FU--  -NO CONTROL EQUIPMENT  -SIC=   ) -TOTAL RECS =    5

```
TEMP RANGE   COUNT

                          -----------------------------------------------------------------------------------------------------
   0.- 100.   .0          !
 101.- 200.   .0          !
 201.- 300.   .0          !
 301.- 400.   .0          !
 401.- 500.   .0          !
 501.- 600.   .0          !
 601.- 700.   .0          !
 701.- 800.   .0          !
 801.- 900.   .0          !
 901.-1000.   .0          !
1001.-1100.   .0          !
1101.-1200.   .0          !
1201.-1300.   .0          !
1301.-1400.   .0          !
1401.-1500.   .0          !
1501.-1600.   .0          !
1601.-1700.   .0          !
1701.-1800.   .0          !
1801.-1900.   .0          !
1901.-2000.   .0          !
2001.-2100.   .0          !
2101.-2200.   .0          !
2201.-2300.   .0          !
2301.-2400.   .0          !
2401.-2500.   .0          !
2501.-2600.   .0          !
2601.-2700.   .0          !
2701.-2800.   .398E 11    !H
2801.-2900.   .0          !
2901.-3000.   .0          !
                          0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400802--ZINC SEC HORIZONTAL MUFFLE FU -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 1

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .216E 11 | .203E 11 | .165E 11 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .216E 11 | .203E 11 | .165E 11 | .0 | .0 | .0 |

SCC = 30400802--ZINC SEC    HORIZONTAL MUFFLE FU -WITH CONTROL EQUIPMENT -TOT RECS =    1

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .216E 11 | .203E 11 | .165E 11 | .0 | .0 | .0 |
| | .216E 11 | .203E 11 | .165E 11 | .0 | .0 | .0 |

CC =30400802--ZINC SEC    HORIZONTAL MUFFLE FU---WITH CONTROL EQUIPMENT  -SIC=   0 -TOTAL RECS =    1

```
TEMP RANGE   COUNT
                       ----------------------------------------------------------------------------------------------------
   0.- 100.  .203E 11  !H
 101.- 200.  .0        !
 201.- 300.  .0        !
 301.- 400.  .0        !
 401.- 500.  .0        !
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400802--ZINC SEC    HORIZONTAL MUFFLE FU -TOTAL SCC -SIC =    0 -TOT RECS =    6

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .216E 11 | .203E 11 | .165E 11 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .445E 11 | .398E 11 | .322E 11 | .339E 11 | .299E 11 | .307E 11 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .661E 11 | .601E 11 | .488E 11 | .339E 11 | .299E 11 | .307E 11 |

SCC = 30400802--ZINC SEC    HORIZONTAL MUFFLE FU -TOTAL SCC -TOT RECS =      6

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .661E 11 | .601E 11 | .488E 11 | .339E 11 | .299E 11 | .307E 11 |
| | .661E 11 | .601E 11 | .488E 11 | .339E 11 | .299E 11 | .307E 11 |

CC 30400802--ZINC SEC     HORIZONTAL MUFFLE FU--TOTAL SCC  -SIC =    0 -TOT RECS =      6

```
EMP RANGE   COUNT
                      ----------------------------------------------------------------------------------------------------
   0.- 100.  .203E 11  !H
 101.- 200.  .0        !
 201.- 300.  .0        !
 301.- 400.  .0        !
 401.- 500.  .0        !
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .398E 11  !H
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400803--ZINC SEC POT FURNACE -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 21

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .672E 11 | .630E 11 | .514E 11 | .0 | .0 | .0 |
| 101.- 200. | .964E 12 | .720E 12 | .791E 11 | .0 | .0 | .0 |
| 201.- 300. | .231E 11 | .175E 11 | .914E 10 | .0 | .0 | .0 |
| 301.- 400. | .180E 12 | .140E 12 | .691E 10 | .116E 11 | .110E 11 | .982E 09 |
| 401.- 500. | .861E 11 | .676E 11 | .0 | .837E 10 | .795E 10 | .0 |
| 501.- 600. | .951E 11 | .763E 11 | .0 | .183E 11 | .174E 11 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .142E 13 | .108E 13 | .147E 12 | .382E 11 | .363E 11 | .982E 09 |

SCC = 30400803--ZINC SEC POT FURNACE -NO CONTROL EQUIPMENT -TOT RECS = 21

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .230E 12 | .172E 12 | .847E 11 | .0 | .0 | .0 |
| 33 | .733E 12 | .566E 12 | .618E 11 | .194E 11 | .184E 11 | .982E 09 |
| 34 | .168E 12 | .131E 12 | .0 | .126E 11 | .119E 11 | .0 |
| 36 | .134E 12 | .100E 12 | .0 | .0 | .0 | .0 |
| 39 | .838E 11 | .654E 11 | .0 | .622E 10 | .591E 10 | .0 |
| 99 | .682E 11 | .509E 11 | .0 | .0 | .0 | .0 |
| | .142E 13 | .108E 13 | .147E 12 | .382E 11 | .363E 11 | .982E 09 |

CC = 30400803--ZINC SEC POT FURNACE -- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 21

```
TEMP RANGE   COUNT
              ---------------------------------------------------------------------------------------------------
   0.- 100.  .630E 11  !H
 101.- 200.  .720E 12  !HHHHHHH
 201.- 300.  .175E 11  !H
 301.- 400.  .140E 12  !H
 401.- 500.  .676E 11  !H
 501.- 600.  .763E 11  !H
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400803--ZINC SEC POT FURNACE -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 4

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .102E 12 | .954E 11 | .486E 11 | .0 | .0 | .0 |
| 101.- 200. | .288E 11 | .215E 11 | .107E 11 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .165E 12 | .139E 12 | .992E 11 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .666E 11 | .634E 11 | .578E 11 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .295E 12 | .256E 12 | .158E 12 | .666E 11 | .634E 11 | .578E 11 |

SCC = 30400803--ZINC SEC POT FURNACE -WITH CONTROL EQUIPMENT -TOT RECS = 4

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .267E 12 | .234E 12 | .148E 12 | .666E 11 | .634E 11 | .578E 11 |
| 34 | .288E 11 | .215E 11 | .107E 11 | .0 | .0 | .0 |
| | .295E 12 | .256E 12 | .158E 12 | .666E 11 | .634E 11 | .578E 11 |

CC =30400803--ZINC SEC POT FURNACE ---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 4

```
TEMP RANGE   COUNT
                        ----------------------------------------------------------------------------------------------------
   0.- 100.  .954E 11  !H
 101.- 200.  .215E 11  !H
 201.- 300.  .0        !
 301.- 400.  .0        !
 401.- 500.  .0        !
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .139E 12  !H
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400803--ZINC SEC POT FURNACE -TOTAL SCC -SIC = 0 -TOT RECS = 25

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .169E 12 | .158E 12 | .100E 12 | .0 | .0 | .0 |
| 101.- 200. | .993E 12 | .741E 12 | .898E 11 | .0 | .0 | .0 |
| 201.- 300. | .231E 11 | .175E 11 | .914E 10 | .0 | .0 | .0 |
| 301.- 400. | .180E 12 | .140E 12 | .691E 10 | .0 | .0 | .0 |
| 401.- 500. | .861E 11 | .676E 11 | .0 | .116E 11 | .110E 11 | .982E 09 |
| 501.- 600. | .951E 11 | .763E 11 | .0 | .837E 10 | .795E 10 | .0 |
| 601.- 700. | .0 | .0 | .0 | .183E 11 | .174E 11 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .165E 12 | .139E 12 | .992E 11 | .666E 11 | .634E 11 | .578E 11 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .171E 13 | .134E 13 | .305E 12 | .105E 12 | .997E 11 | .588E 11 |

SCC = 30400803--ZINC SEC    POT FURNACE    -TOTAL SCC -TOT RECS =    25

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .230E 12 | .172E 12 | .847E 11 | .0 | .0 | .0 |
| 33 | .999E 12 | .800E 12 | .210E 12 | .860E 11 | .818E 11 | .588E 11 |
| 34 | .196E 12 | .152E 12 | .107E 11 | .126E 11 | .119E 11 | .0 |
| 36 | .134E 12 | .100E 12 | .0 | .0 | .0 | .0 |
| 39 | .838E 11 | .654E 11 | .0 | .622E 10 | .591E 10 | .0 |
| 99 | .682E 11 | .509E 11 | .0 | .0 | .0 | .0 |
| | .171E 13 | .134E 13 | .305E 12 | .105E 12 | .997E 11 | .588E 11 |

CC 30400803--ZINC SEC    POT FURNACE    --TOTAL SCC  -SIC =    0 -TOT RECS =    25

```
EMP RANGE   COUNT

                         -----------------------------------------------------------------------------------------------------
   0.- 100.  .158E 12   !H
 101.- 200.  .741E 12   !HHHHHHH
 201.- 300.  .175E 11   !H
 301.- 400.  .140E 12   !H
 401.- 500.  .676E 11   !H
 501.- 600.  .763E 11   !H
 601.- 700.  .0         !
 701.- 800.  .0         !
 801.- 900.  .0         !
 901.-1000.  .139E 12   !H
1001.-1100.  .0         !
1101.-1200.  .0         !
1201.-1300.  .0         !
1301.-1400.  .0         !
1401.-1500.  .0         !
1501.-1600.  .0         !
1601.-1700.  .0         !
1701.-1800.  .0         !
1801.-1900.  .0         !
1901.-2000.  .0         !
2001.-2100.  .0         !
2101.-2200.  .0         !
2201.-2300.  .0         !
2301.-2400.  .0         !
2401.-2500.  .0         !
2501.-2600.  .0         !
2601.-2700.  .0         !
2701.-2800.  .0         !
2801.-2900.  .0         !
2901.-3000.  .0         !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400804--ZINC SEC KETTLE-SWEATING FURN -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 4

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .519E 09 | .389E 09 | .191E 09 | .0 | .0 | .0 |
| 201.- 300. | .461E 11 | .349E 11 | .183E 11 | .0 | .0 | .0 |
| 301.- 400. | .507E 11 | .391E 11 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .113E 10 | .108E 10 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .973E 11 | .744E 11 | .185E 11 | .113E 10 | .108E 10 | .0 |

SCC = 30400804--ZINC SEC    KETTLE-SWEATING FURN -NO CONTROL EQUIPMENT -TOT RECS =    4

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .461E 11 | .349E 11 | .183E 11 | .0 | .0 | .0 |
| 33 | .512E 11 | .395E 11 | .191E 09 | .113E 10 | .108E 10 | .0 |
| | .973E 11 | .744E 11 | .185E 11 | .113E 10 | .108E 10 | .0 |

CC = 30400804--ZINC SEC    KETTLE-SWEATING FURN--  -NO CONTROL EQUIPMENT  -SIC=   0 -TOTAL RECS =    4

```
TEMP RANGE   COUNT
                     ------------------------------------------------------------------------------------------------------
    0.- 100.  .0        !
  101.- 200.  .389E 09  !
  201.- 300.  .349E 11  !H
  301.- 400.  .391E 11  !H
  401.- 500.  .0        !
  501.- 600.  .0        !
  601.- 700.  .0        !
  701.- 800.  .0        !
  801.- 900.  .0        !
  901.-1000.  .0        !
 1001.-1100.  .0        !
 1101.-1200.  .0        !
 1201.-1300.  .0        !
 1301.-1400.  .0        !
 1401.-1500.  .0        !
 1501.-1600.  .0        !
 1601.-1700.  .0        !
 1701.-1800.  .0        !
 1801.-1900.  .0        !
 1901.-2000.  .0        !
 2001.-2100.  .0        !
 2101.-2200.  .0        !
 2201.-2300.  .0        !
 2301.-2400.  .0        !
 2401.-2500.  .0        !
 2501.-2600.  .0        !
 2601.-2700.  .0        !
 2701.-2800.  .0        !
 2801.-2900.  .0        !
 2901.-3000.  .0        !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400804--ZINC SEC KETTLE-SWEATING FURN -WITH CONTROL EQUIPMENT -SIC = ) -TOT RECS = 7

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .177E 11 | .132E 11 | .0 | .0 | .0 | .0 |
| 201.- 300. | .980E 10 | .751E 10 | .0 | .0 | .0 | .0 |
| 301.- 400. | .217E 11 | .169E 11 | .493E 10 | .161E 10 | .153E 10 | .700E 09 |
| 401.- 500. | .237E 11 | .188E 11 | .0 | .360E 10 | .342E 10 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .729E 11 | .565E 11 | .493E 10 | .521E 10 | .495E 10 | .700E 09 |

SCC = 30400804--ZINC SEC    KETTLE-SWEATING FURN -WITH CONTROL EQUIPMENT -TOT RECS =     7

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .729E 11 | .565E 11 | .493E 10 | .521E 10 | .495E 10 | .700E 09 |
| | .729E 11 | .565E 11 | .493E 10 | .521E 10 | .495E 10 | .700E 09 |

CC =30400804--ZINC SEC     KETTLE-SWEATING FURN---WITH CONTROL EQUIPMENT  -SIC=    0 -TOTAL RECS =      7

```
TEMP RANGE   COUNT

                         ----------------------------------------------------------------------------------------------------
   0.- 100.  .0          !
 101.- 200.  .132E 11    !H
 201.- 300.  .751E 10    !H
 301.- 400.  .169E 11    !H
 401.- 500.  .188E 11    !H
 501.- 600.  .0          !
 601.- 700.  .0          !
 701.- 800.  .0          !
 801.- 900.  .0          !
 901.-1000.  .0          !
1001.-1100.  .0          !
1101.-1200.  .0          !
1201.-1300.  .0          !
1301.-1400.  .0          !
1401.-1500.  .0          !
1501.-1600.  .0          !
1601.-1700.  .0          !
1701.-1800.  .0          !
1801.-1900.  .0          !
1901.-2000.  .0          !
2001.-2100.  .0          !
2101.-2200.  .0          !
2201.-2300.  .0          !
2301.-2400.  .0          !
2401.-2500.  .0          !
2501.-2600.  .0          !
2601.-2700.  .0          !
2701.-2800.  .0          !
2801.-2900.  .0          !
2901.-3000.  .0          !
                         0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400804--ZINC SEC KETTLE-SWEATING FURN -TOTAL SCC -SIC = 0 -TOT RECS = 11

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .182E 11 | .136E 11 | .191E 09 | .0 | .0 | .0 |
| 201.- 300. | .559E 11 | .424E 11 | .183E 11 | .0 | .0 | .0 |
| 301.- 400. | .724E 11 | .560E 11 | .493E 10 | .274E 10 | .261E 10 | .700E 09 |
| 401.- 500. | .237E 11 | .183E 11 | .0 | .360E 10 | .342E 10 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .170E 12 | .131E 12 | .234E 11 | .634E 10 | .602E 10 | .700E 09 |

SCC = 30400804--ZINC SEC KETTLE-SWEATING FURN -TOTAL SCC -TOT RECS = 11

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .461E 11 | .349E 11 | .183E 11 | .0 | .0 | .0 |
| 33 | .124E 12 | .959E 11 | .512E 10 | .634E 10 | .602E 10 | .700E 09 |
| | .170E 12 | .131E 12 | .234E 11 | .634E 10 | .602E 10 | .700E 09 |

CC 30400804--ZINC SEC KETTLE-SWEATING FURN--TOTAL SCC -SIC = 0 -TOT RECS = 11

```
EMP RANGE    COUNT
                     ------------------------------------------------------------------------------------------------------
   0.- 100.   .0        !
 101.- 200.   .136E 11  !H
 201.- 300.   .424E 11  !H
 301.- 400.   .560E 11  !H
 401.- 500.   .188E 11  !H
 501.- 600.   .0        !
 601.- 700.   .0        !
 701.- 800.   .0        !
 801.- 900.   .0        !
 901.-1000.   .0        !
1001.-1100.   .0        !
1101.-1200.   .0        !
1201.-1300.   .0        !
1301.-1400.   .0        !
1401.-1500.   .0        !
1501.-1600.   .0        !
1601.-1700.   .0        !
1701.-1800.   .0        !
1801.-1900.   .0        !
1901.-2000.   .0        !
2001.-2100.   .0        !
2101.-2200.   .0        !
2201.-2300.   .0        !
2301.-2400.   .0        !
2401.-2500.   .0        !
2501.-2600.   .0        !
2601.-2700.   .0        !
2701.-2800.   .0        !
2801.-2900.   .0        !
2901.-3000.   .0        !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400805--ZINC SEC GALVANIZING KETTLE -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 31

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .905E 11 | .849E 11 | .367E 11 | .0 | .0 | .0 |
| 101.- 200. | .517E 12 | .398E 12 | .505E 11 | .0 | .0 | .0 |
| 201.- 300. | .288E 12 | .219E 12 | .0 | .0 | .0 | .0 |
| 301.- 400. | .866E 11 | .674E 11 | .913E 10 | .565E 10 | .536E 10 | .666E 09 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .103E 12 | .867E 11 | .0 | .423E 11 | .403E 11 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .108E 13 | .856E 12 | .963E 11 | .480E 11 | .456E 11 | .666E 09 |

SCC = 30400805--ZINC SEC GALVANIZING KETTLE -NO CONTROL EQUIPMENT -TOT RECS = 31

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 14 | .101E 12 | .762E 11 | .0 | .0 | .0 | .0 |
| 24 | .564E 11 | .427E 11 | .0 | .0 | .0 | .0 |
| 32 | .327E 11 | .307E 11 | .250E 11 | .0 | .0 | .0 |
| 33 | .202E 12 | .167E 12 | .559E 11 | .453E 09 | .430E 09 | .394E 09 |
| 34 | .576E 12 | .452E 12 | .154E 11 | .475E 11 | .452E 11 | .273E 09 |
| 35 | .564E 11 | .427E 11 | .0 | .0 | .0 | .0 |
| 50 | .593E 11 | .455E 11 | .0 | .0 | .0 | .0 |
| | .108E 13 | .856E 12 | .963E 11 | .480E 11 | .456E 11 | .666E 09 |

CC = 30400805--ZINC SEC GALVANIZING KETTLE -- -NO CONTROL EQUIPMENT -SIC= ) -TOTAL RECS = 31

```
TEMP RANGE     COUNT
                         ------------------------------------------------------------------------------------------------
   0.- 100.   .849E 11  !H
 101.- 200.   .398E 12  !HHH
 201.- 300.   .219E 12  !HH
 301.- 400.   .674E 11  !H
 401.- 500.   .0        !
 501.- 600.   .0        !
 601.- 700.   .0        !
 701.- 800.   .0        !
 801.- 900.   .0        !
 901.-1000.   .867E 11  !H
1001.-1100.   .0        !
1101.-1200.   .0        !
1201.-1300.   .0        !
1301.-1400.   .0        !
1401.-1500.   .0        !
1501.-1600.   .0        !
1601.-1700.   .0        !
1701.-1800.   .0        !
1801.-1900.   .0        !
1901.-2000.   .0        !
2001.-2100.   .0        !
2101.-2200.   .0        !
2201.-2300.   .0        !
2301.-2400.   .0        !
2401.-2500.   .0        !
2501.-2600.   .0        !
2601.-2700.   .0        !
2701.-2800.   .0        !
2801.-2900.   .0        !
2901.-3000.   .0        !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400805--ZINC SEC GALVANIZING KETTLE -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 8

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .419E 11 | .313E 11 | .155E 11 | .0 | .0 | .0 |
| 201.- 300. | .485E 11 | .367E 11 | .0 | .0 | .0 | .0 |
| 301.- 400. | .829E 10 | .647E 10 | .376E 10 | .616E 09 | .584E 09 | .535E 09 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .666E 11 | .539E 11 | .0 | .155E 11 | .147E 11 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .143E 11 | .121E 11 | .865E 10 | .589E 10 | .560E 10 | .511E 10 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .180E 12 | .140E 12 | .279E 11 | .220E 11 | .209E 11 | .564E 10 |

SCC = 30400805--ZINC SEC    GALVANIZING KETTLE   -WITH CONTROL EQUIPMENT -TOT RECS =     8

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .180E 12 | .140E 12 | .279E 11 | .220E 11 | .209E 11 | .564E 10 |
| 34 | .254E 08 | .190E 08 | .934E 07 | .0 | .0 | .0 |
| | .180E 12 | .140E 12 | .279E 11 | .220E 11 | .209E 11 | .564E 10 |

CC =30400805--ZINC SEC    GALVANIZING KETTLE  ---WITH CONTROL EQUIPMENT  -SIC=    0 -TOTAL RECS =     8

```
TEMP RANGE   COUNT
                        ------------------------------------------------------------------------------------------------------
   0.- 100.  .0         !
 101.- 200.  .313E 11   !H
 201.- 300.  .367E 11   !H
 301.- 400.  .647E 10   !H
 401.- 500.  .0         !
 501.- 600.  .539E 11   !H
 601.- 700.  .0         !
 701.- 800.  .0         !
 801.- 900.  .0         !
 901.-1000.  .121E 11   !H
1001.-1100.  .0         !
1101.-1200.  .0         !
1201.-1300.  .0         !
1301.-1400.  .0         !
1401.-1500.  .0         !
1501.-1600.  .0         !
1601.-1700.  .0         !
1701.-1800.  .0         !
1801.-1900.  .0         !
1901.-2000.  .0         !
2001.-2100.  .0         !
2101.-2200.  .0         !
2201.-2300.  .0         !
2301.-2400.  .0         !
2401.-2500.  .0         !
2501.-2600.  .0         !
2601.-2700.  .0         !
2701.-2800.  .0         !
2801.-2900.  .0         !
2901.-3000.  .0         !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400805--ZINC SEC GALVANIZING KETTLE -TOTAL SCC -SIC = 0 -TOT RECS = 39

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .905E 11 | .849E 11 | .367E 11 | .0 | .0 | .0 |
| 101.- 200. | .558E 12 | .429E 12 | .660E 11 | .0 | .0 | .0 |
| 201.- 300. | .336E 12 | .256E 12 | .0 | .0 | .0 | .0 |
| 301.- 400. | .949E 11 | .739E 11 | .129E 11 | .626E 10 | .595E 10 | .120E 10 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .666E 11 | .539E 11 | .0 | .155E 11 | .147E 11 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .117E 12 | .987E 11 | .865E 10 | .482E 11 | .459E 11 | .511E 10 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .126E 13 | .997E 12 | .124E 12 | .700E 11 | .666E 11 | .631E 10 |

SCC = 30400805--ZINC SEC    GALVANIZING KETTLE   -TOTAL SCC -TOT RECS =     39

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 14 | .101E 12 | .762E 11 | .0 | .0 | .0 | .0 |
| 24 | .564E 11 | .427E 11 | .0 | .0 | .0 | .0 |
| 32 | .327E 11 | .307E 11 | .250E 11 | .0 | .0 | .0 |
| 33 | .381E 12 | .307E 12 | .838E 11 | .225E 11 | .214E 11 | .604E 10 |
| 34 | .577E 12 | .452E 12 | .154E 11 | .475E 11 | .452E 11 | .273E 09 |
| 35 | .564E 11 | .427E 11 | .0 | .0 | .0 | .0 |
| 50 | .593E 11 | .455E 11 | .0 | .0 | .0 | .0 |
| | .126E 13 | .997E 12 | .124E 12 | .700E 11 | .666E 11 | .631E 10 |

CC 30400805--ZINC SEC     GALVANIZING KETTLE  --TOTAL SCC  -SIC =    0 -TOT RECS =     39

```
EMP RANGE   COUNT

                        ----------------------------------------------------------------------------------------------------
   0.- 100.  .849E 11  !H
 101.- 200.  .429E 12  !HHHH
 201.- 300.  .256E 12  !HH
 301.- 400.  .739E 11  !H
 401.- 500.  .0        !
 501.- 600.  .539E 11  !H
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .987E 11  !H
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400806--ZINC SEC CALCINING KILN -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 4

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .270E 13 | .225E 13 | .117E 13 | .959E 12 | .913E 12 | .623E 12 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .270E 13 | .225E 13 | .117E 13 | .959E 12 | .913E 12 | .623E 12 |

SCC = 30400806--ZINC SEC    CALCINING KILN    -NO CONTROL EQUIPMENT -TOT RECS =    4

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .270E 13 | .225E 13 | .117E 13 | .959E 12 | .913E 12 | .623E 12 |
| | .270E 13 | .225E 13 | .117E 13 | .959E 12 | .913E 12 | .623E 12 |

CC = 30400806--ZINC SEC    CALCINING KILN    --  -NO CONTROL EQUIPMENT  -SIC=   0 -TOTAL RECS =    4

```
TEMP RANGE   COUNT
                     ------------------------------------------------------------------------------------------------------
   0.- 100.   .0         !
 101.- 200.   .0         !
 201.- 300.   .0         !
 301.- 400.   .0         !
 401.- 500.   .0         !
 501.- 600.   .0         !
 601.- 700.   .0         !
 701.- 800.   .0         !
 801.- 900.   .225E 13   !HHHHHHHHHHHHHHHHHHHHHHH
 901.-1000.   .0         !
1001.-1100.   .0         !
1101.-1200.   .0         !
1201.-1300.   .0         !
1301.-1400.   .0         !
1401.-1500.   .0         !
1501.-1600.   .0         !
1601.-1700.   .0         !
1701.-1800.   .0         !
1801.-1900.   .0         !
1901.-2000.   .0         !
2001.-2100.   .0         !
2101.-2200.   .0         !
2201.-2300.   .0         !
2301.-2400.   .0         !
2401.-2500.   .0         !
2501.-2600.   .0         !
2601.-2700.   .0         !
2701.-2800.   .0         !
2801.-2900.   .0         !
2901.-3000.   .0         !
                         0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400806--ZINC SEC CALCINING KILN -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 2

| | | | | | | |
|---|---|---|---|---|---|---|
| TEMP | MAXIMUM | EXPECTED | MINIMUM | MAXIMUM | EXPECTED | MINIMUM |
| | 60 DEG | 60 DEG | 60 DEG | 300 DEG | 300 DEG | 300 DEG |

0 RECORDS FOR THIS SECTION OF SCC

SCC = 30400806--ZINC SEC    CALCINING KILN    -WITH CONTROL EQUIPMENT -TOT RECS = 2

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| TEMP OUTSIDE | CURVES | 0.0 | | | | |
| TEMP OUTSIDE | CURVES | 0.0 | | | | |
| TEMP OUTSIDE | CURVES | 0.0 | | | | |
| TEMP OUTSIDE | CURVES | 0.0 | | | | |
| TEMP OUTSIDE | CURVES | 0.0 | | | | |
| TEMP OUTSIDE | CURVES | 0.0 | | | | |
| TEMP OUTSIDE | CURVES | 0.0 | | | | |
| TEMP OUTSIDE | CURVES | 0.0 | | | | |
| TEMP OUTSIDE | CURVES | 0.0 | | | | |

SCC= 30400808--ZINC SEC     REVERBERATORY-SWEATI -NO CONTROL EQUIPMENT -SIC =    0  -TOT RECS =     3

| TEMP | MAXIMUM | EXPECTED | MINIMUM | MAXIMUM | EXPECTED | MINIMUM |
|---|---|---|---|---|---|---|
| | 60 DEG | 60 DEG | 60 DEG | 300 DEG | 300 DEG | 300 DEG |

0 RECORDS FOR THIS SECTION OF SCC

SCC = 30400808--ZINC SEC REVERBERATORY-SWEATI -NO CONTROL EQUIPMENT -TOT RECS = 3

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|

SCC= 30400808--ZINC SEC REVERBERATORY-SWEATI -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 3

| | | | | | | |
|---|---|---|---|---|---|---|
| TEMP | MAXIMUM | EXPECTED | MINIMUM | MAXIMUM | EXPECTED | MINIMUM |
| | 60 DEG | 60 DEG | 60 DEG | 300 DEG | 300 DEG | 300 DEG |

0 RECORDS FOR THIS SECTION OF SCC

SCC = 30400808--ZINC SEC REVERBERATORY-SWEATI -WITH CONTROL EQUIPMENT -TOT RECS = 3

| SIC | MAXIMUM | EXPECTED | MINIMUM | MAXIMUM | EXPECTED | MINIMUM |
|---|---|---|---|---|---|---|
| | 60 DEG | 60 DEG | 60 DEG | 300DEG | 300 DEG | 300 DEG |

SCC= 30400899--ZINC SEC OTHER/NOT CLASSIFIED -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 32

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .727E 11 | .682E 11 | .555E 11 | .0 | .0 | .0 |
| 101.- 200. | .855E 11 | .638E 11 | .313E 11 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .958E 12 | .755E 12 | .157E 11 | .109E 12 | .104E 12 | .425E 10 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .118E 13 | .986E 12 | .0 | .450E 12 | .428E 12 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .134E 12 | .114E 12 | .828E 11 | .591E 11 | .563E 11 | .513E 11 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .158E 12 | .137E 12 | .0 | .840E 11 | .799E 11 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .259E 13 | .212E 13 | .185E 12 | .702E 12 | .668E 12 | .555E 11 |

SCC = 30400899--ZINC SEC    OTHER/NOT CLASSIFIED -NO CONTROL EQUIPMENT -TOT RECS =    32

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 19 | .189E 11 | .177E 11 | .144E 11 | .0 | .0 | .0 |
| 32 | .855E 11 | .638E 11 | .313E 11 | .0 | .0 | .0 |
| 33 | .221E 13 | .183E 13 | .126E 12 | .674E 12 | .641E 12 | .555E 11 |
| 34 | .842E 11 | .663E 11 | .0 | .949E 10 | .901E 10 | .0 |
| 36 | .842E 11 | .663E 11 | .0 | .949E 10 | .901E 10 | .0 |
| 37 | .181E 11 | .170E 11 | .138E 11 | .0 | .0 | .0 |
| 99 | .842E 11 | .663E 11 | .0 | .949E 10 | .901E 10 | .0 |
| | .259E 13 | .212E 13 | .185E 12 | .702E 12 | .668E 12 | .555E 11 |

CC = 30400899--ZINC SEC    OTHER/NOT CLASSIFIED--  -NO CONTROL EQUIPMENT  -SIC=    0 -TOTAL RECS =    32

```
TEMP RANGE   COUNT
                     ------------------------------------------------------------------------------------------------------
   0.- 100.  .682E 11  !H
 101.- 200.  .638E 11  !H
 201.- 300.  .0        !
 301.- 400.  .0        !
 401.- 500.  .755E 12  !HHHHHHH
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .986E 12  !HHHHHHHHH
 901.-1000.  .0        !
1001.-1100.  .114E 12  !H
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .137E 12  !H
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400899--ZINC SEC OTHER/NOT CLASSIFIED -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 17

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .360E 11 | .338E 11 | .829E 10 | .0 | .0 | .0 |
| 101.- 200. | .112E 13 | .894E 12 | .452E 12 | .0 | .0 | .0 |
| 201.- 300. | .296E 11 | .224E 11 | .118E 11 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .315E 11 | .250E 11 | .154E 11 | .478E 10 | .454E 10 | .415E 10 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .121E 13 | .975E 12 | .487E 12 | .478E 10 | .454E 10 | .415E 10 |

SCC = 30400899--ZINC SEC    OTHER/NOT CLASSIFIED -WITH CONTROL EQUIPMENT -TOT RECS =    17

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 10 | .750E 10 | .703E 10 | .573E 10 | .0 | .0 | .0 |
| 33 | .104E 13 | .845E 12 | .420E 12 | .478E 10 | .454E 10 | .415E 10 |
| 37 | .336E 10 | .315E 10 | .256E 10 | .0 | .0 | .0 |
| 38 | .160E 12 | .120E 12 | .589E 11 | .0 | .0 | .0 |
| | .121E 13 | .975E 12 | .487E 12 | .478E 10 | .454E 10 | .415E 10 |

CC =30400899--ZINC SEC    OTHER/NOT CLASSIFIED---WITH CONTROL EQUIPMENT  -SIC=    0 -TOTAL RECS =     17

```
TEMP RANGE   COUNT
                    ------------------------------------------------------------------------------------------------------
   0.- 100.  .338E 11  !H
 101.- 200.  .894E 12  !HHHHHHHH
 201.- 300.  .224E 11  !H
 301.- 400.  .0        !
 401.- 500.  .250E 11  !H
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400899--ZINC SEC OTHER/NOT CLASSIFIED -TOTAL SCC -SIC = 0 -TOT RECS = 49

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .109E 12 | .102E 12 | .638E 11 | .0 | .0 | .0 |
| 101.- 200. | .120E 13 | .958E 12 | .483E 12 | .0 | .0 | .0 |
| 201.- 300. | .296E 11 | .224E 11 | .118E 11 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .990E 12 | .780E 12 | .311E 11 | .114E 12 | .108E 12 | .840E 10 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .118E 13 | .986E 12 | .0 | .450E 12 | .428E 12 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .134E 12 | .114E 12 | .828E 11 | .591E 11 | .563E 11 | .513E 11 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .158E 12 | .137E 12 | .0 | .840E 11 | .799E 11 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .380E 13 | .310E 13 | .672E 12 | .707E 12 | .673E 12 | .597E 11 |

SCC = 30400899--ZINC SEC OTHER/NOT CLASSIFIED -TOTAL SCC -TOT RECS = 49

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 10 | .750E 10 | .703E 10 | .573E 10 | .0 | .0 | .0 |
| 19 | .189E 11 | .177E 11 | .144E 11 | .0 | .0 | .0 |
| 32 | .855E 11 | .638E 11 | .313E 11 | .0 | .0 | .0 |
| 33 | .325E 13 | .267E 13 | .546E 12 | .678E 12 | .646E 12 | .597E 11 |
| 34 | .842E 11 | .663E 11 | .0 | .949E 10 | .901E 10 | .0 |
| 36 | .842E 11 | .663E 11 | .0 | .949E 10 | .901E 10 | .0 |
| 37 | .215E 11 | .201E 11 | .164E 11 | .0 | .0 | .0 |
| 38 | .160E 12 | .120E 12 | .589E 11 | .0 | .0 | .0 |
| 99 | .842E 11 | .663E 11 | .0 | .949E 10 | .901E 10 | .0 |
| | .380E 13 | .310E 13 | .672E 12 | .707E 12 | .673E 12 | .597E 11 |

CC 30400899--ZINC SEC OTHER/NOT CLASSIFIED--TOTAL SCC -SIC = 0 -TOT RECS = 49

```
EMP RANGE     COUNT
                       ------------------------------------------------------------------------------------------------------
    0.- 100.  .102E 12 !H
  101.- 200.  .958E 12 !HHHHHHHHH
  201.- 300.  .224E 11 !H
  301.- 400.  .0       !
  401.- 500.  .780E 12 !HHHHHHH
  501.- 600.  .0       !
  601.- 700.  .0       !
  701.- 800.  .0       !
  801.- 900.  .986E 12 !HHHHHHHHH
  901.-1000.  .0       !
 1001.-1100.  .114E 12 !H
 1101.-1200.  .0       !
 1201.-1300.  .0       !
 1301.-1400.  .137E 12 !H
 1401.-1500.  .0       !
 1501.-1600.  .0       !
 1601.-1700.  .0       !
 1701.-1800.  .0       !
 1801.-1900.  .0       !
 1901.-2000.  .0       !
 2001.-2100.  .0       !
 2101.-2200.  .0       !
 2201.-2300.  .0       !
 2301.-2400.  .0       !
 2401.-2500.  .0       !
 2501.-2600.  .0       !
 2601.-2700.  .0       !
 2701.-2800.  .0       !
 2801.-2900.  .0       !
 2901.-3000.  .0       !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400901--MALLEABLE IR ANNEALING OPERATION -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 5

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .148E 12 | .116E 12 | .334E 11 | .167E 11 | .159E 11 | .585E 10 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .516E 11 | .432E 11 | .0 | .197E 11 | .188E 11 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .199E 12 | .159E 12 | .334E 11 | .365E 11 | .347E 11 | .585E 10 |

SCC = 30400901--MALLEABLE IRANNEALING OPERATION -NO CONTROL EQUIPMENT -TOT RECS = 5

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .199E 12 | .159E 12 | .334E 11 | .365E 11 | .347E 11 | .585E 10 |
| | .199E 12 | .159E 12 | .334E 11 | .365E 11 | .347E 11 | .585E 10 |

CC = 30400901--MALLEABLE IR ANNEALING OPERATION -- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 5

```
TEMP RANGE    COUNT
                         ------------------------------------------------------------------------------------------------
    0.- 100.  .0         !
  101.- 200.  .0         !
  201.- 300.  .0         !
  301.- 400.  .0         !
  401.- 500.  .116E 12   !H
  501.- 600.  .0         !
  601.- 700.  .0         !
  701.- 800.  .0         !
  801.- 900.  .432E 11   !H
  901.-1000.  .0         !
 1001.-1100.  .0         !
 1101.-1200.  .0         !
 1201.-1300.  .0         !
 1301.-1400.  .0         !
 1401.-1500.  .0         !
 1501.-1600.  .0         !
 1601.-1700.  .0         !
 1701.-1800.  .0         !
 1801.-1900.  .0         !
 1901.-2000.  .0         !
 2001.-2100.  .0         !
 2101.-2200.  .0         !
 2201.-2300.  .0         !
 2301.-2400.  .0         !
 2401.-2500.  .0         !
 2501.-2600.  .0         !
 2601.-2700.  .0         !
 2701.-2800.  .0         !
 2801.-2900.  .0         !
 2901.-3000.  .0         !
                         0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400901--MALLEABLE IR ANNEALING OPERATION -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 1

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .122E 11 | .915E 10 | .449E 10 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .122E 11 | .915E 10 | .449E 10 | .0 | .0 | .0 |

SCC = 30400901--MALLEABLE IRANNEALING OPERATION -WITH CONTROL EQUIPMENT -TOT RECS = 1

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 99 | .122E 11 | .915E 10 | .449E 10 | .0 | .0 | .0 |
| | .122E 11 | .915E 10 | .449E 10 | .0 | .0 | .0 |

CC =30400901--MALLEABLE IR ANNEALING OPERATION ---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 1

```
TEMP RANGE   COUNT

                       ------------------------------------------------------------------------------------------------------
   0.- 100.   .0       !
 101.- 200.   .915E 10 !H
 201.- 300.   .0       !
 301.- 400.   .0       !
 401.- 500.   .0       !
 501.- 600.   .0       !
 601.- 700.   .0       !
 701.- 800.   .0       !
 801.- 900.   .0       !
 901.-1000.   .0       !
1001.-1100.   .0       !
1101.-1200.   .0       !
1201.-1300.   .0       !
1301.-1400.   .0       !
1401.-1500.   .0       !
1501.-1600.   .0       !
1601.-1700.   .0       !
1701.-1800.   .0       !
1801.-1900.   .0       !
1901.-2000.   .0       !
2001.-2100.   .0       !
2101.-2200.   .0       !
2201.-2300.   .0       !
2301.-2400.   .0       !
2401.-2500.   .0       !
2501.-2600.   .0       !
2601.-2700.   .0       !
2701.-2800.   .0       !
2801.-2900.   .0       !
2901.-3000.   .0       !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400901--MALLEABLE IR ANNEALING OPERATION -TOTAL SCC -SIC = 0 -TOT RECS = 6

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .122E 11 | .915E 10 | .449E 10 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .148E 12 | .116E 12 | .334E 11 | .167E 11 | .159E 11 | .585E 10 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .516E 11 | .432E 11 | .0 | .197E 11 | .188E 11 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .211E 12 | .169E 12 | .379E 11 | .365E 11 | .347E 11 | .585E 10 |

SCC = 30400901--MALLEABLE IRANNEALING OPERATION  -TOTAL SCC -TOT RECS =      6

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .199E 12 | .159E 12 | .334E 11 | .365E 11 | .347E 11 | .585E 10 |
| 99 | .122E 11 | .915E 10 | .449E 10 | .0 | .0 | .0 |
| | .211E 12 | .169E 12 | .379E 11 | .365E 11 | .347E 11 | .585E 10 |

CC 30400901--MALLEABLE IR ANNEALING OPERATION --TOTAL SCC  -SIC =    0 -TOT RECS =      6

```
EMP RANGE   COUNT

   0.- 100.  .0         !
 101.- 200.  .915E 10   !H
 201.- 300.  .0         !
 301.- 400.  .0         !
 401.- 500.  .116E 12   !H
 501.- 600.  .0         !
 601.- 700.  .0         !
 701.- 800.  .0         !
 801.- 900.  .432E 11   !H
 901.-1000.  .0         !
1001.-1100.  .0         !
1101.-1200.  .0         !
1201.-1300.  .0         !
1301.-1400.  .0         !
1401.-1500.  .0         !
1501.-1600.  .0         !
1601.-1700.  .0         !
1701.-1800.  .0         !
1801.-1900.  .0         !
1901.-2000.  .0         !
2001.-2100.  .0         !
2101.-2200.  .0         !
2201.-2300.  .0         !
2301.-2400.  .0         !
2401.-2500.  .0         !
2501.-2600.  .0         !
2601.-2700.  .0         !
2701.-2800.  .0         !
2801.-2900.  .0         !
2901.-3000.  .0         !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400999--MALLEABLE IR OTHER/NOT CLASSIFIED -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 6

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .175E 12 | .138E 12 | .209E 11 | .210E 11 | .200E 11 | .460E 10 |
| 501.- 600. | .238E 11 | .193E 11 | .125E 11 | .556E 10 | .528E 10 | .483E 10 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .199E 12 | .157E 12 | .334E 11 | .266E 11 | .253E 11 | .943E 10 |

SCC = 30400999--MALLEABLE IROTHER/NOT CLASSIFIED -NO CONTROL EQUIPMENT -TOT RECS = 6

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .440E 11 | .347E 11 | .209E 11 | .530E 10 | .503E 10 | .460E 10 |
| 33 | .155E 12 | .122E 12 | .125E 11 | .213E 11 | .202E 11 | .483E 10 |
| | .199E 12 | .157E 12 | .334E 11 | .266E 11 | .253E 11 | .943E 10 |

CC = 30400999--MALLEABLE IR OTHER/NOT CLASSIFIED-- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 6

```
TEMP RANGE   COUNT

                         ------------------------------------------------------------------------------------------------
   0.- 100.   .0         !
 101.- 200.   .0         !
 201.- 300.   .0         !
 301.- 400.   .0         !
 401.- 500.   .138E 12   !H
 501.- 600.   .193E 11   !H
 601.- 700.   .0         !
 701.- 800.   .0         !
 801.- 900.   .0         !
 901.-1000.   .0         !
1001.-1100.   .0         !
1101.-1200.   .0         !
1201.-1300.   .0         !
1301.-1400.   .0         !
1401.-1500.   .0         !
1501.-1600.   .0         !
1601.-1700.   .0         !
1701.-1800.   .0         !
1801.-1900.   .0         !
1901.-2000.   .0         !
2001.-2100.   .0         !
2101.-2200.   .0         !
2201.-2300.   .0         !
2301.-2400.   .0         !
2401.-2500.   .0         !
2501.-2600.   .0         !
2601.-2700.   .0         !
2701.-2800.   .0         !
2801.-2900.   .0         !
2901.-3000.   .0         !
                         0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400999--MALLEABLE IR OTHER/NOT CLASSIFIED -WITH CONTROL EQUIPMENT -SIC = J -TOT RECS = 11

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .168E 12 | .158E 12 | .826E 11 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .709E 10 | .556E 10 | .328E 10 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .662E 09 | .629E 09 | .575E 09 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .176E 12 | .164E 12 | .859E 11 | .662E 09 | .629E 09 | .575E 09 |

SCC = 30400999--MALLEABLE IROTHER/NOT CLASSIFIED -WITH CONTROL EQUIPMENT -TOT RECS = 11

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .176E 12 | .164E 12 | .859E 11 | .662E 09 | .629E 09 | .575E 09 |
| | .176E 12 | .164E 12 | .859E 11 | .662E 09 | .629E 09 | .575E 09 |

CC =30400999--MALLEABLE IR OTHER/NOT CLASSIFIED---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 11

```
TEMP RANGE   COUNT
                       ------------------------------------------------------------------------------------------------------
   0.- 100.  .158E 12  !H
 101.- 200.  .0        !
 201.- 300.  .0        !
 301.- 400.  .0        !
 401.- 500.  .556E 10  !H
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30400999--MALLEABLE IR OTHER/NOT CLASSIFIED -TOTAL SCC -SIC = 0 -TOT RECS = 17

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .168E 12 | .158E 12 | .826E 11 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .182E 12 | .143E 12 | .242E 11 | .217E 11 | .206E 11 | .518E 10 |
| 501.- 600. | .238E 11 | .193E 11 | .125E 11 | .556E 10 | .528E 10 | .483E 10 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .374E 12 | .321E 12 | .119E 12 | .273E 11 | .259E 11 | .100E 11 |

SCC = 30400999--MALLEABLE IROTHER/NOT CLASSIFIED -TOTAL SCC -TOT RECS = 17

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .440E 11 | .347E 11 | .209E 11 | .530E 10 | .503E 10 | .460E 10 |
| 33 | .330E 12 | .286E 12 | .984E 11 | .220E 11 | .209E 11 | .540E 10 |
| | .374E 12 | .321E 12 | .119E 12 | .273E 11 | .259E 11 | .100E 11 |

CC 30400999--MALLEABLE IR OTHER/NOT CLASSIFIED--TOTAL SCC -SIC = 0 -TOT RECS = 17

```
EMP RANGE   COUNT
                      ----------------------------------------------------------------------------------------------------
   0.- 100.  .158E 12 !H
 101.- 200.  .0       !
 201.- 300.  .0       !
 301.- 400.  .0       !
 401.- 500.  .143E 12 !H
 501.- 600.  .193E 11 !H
 601.- 700.  .0       !
 701.- 800.  .0       !
 801.- 900.  .0       !
 901.-1000.  .0       !
1001.-1100.  .0       !
1101.-1200.  .0       !
1201.-1300.  .0       !
1301.-1400.  .0       !
1401.-1500.  .0       !
1501.-1600.  .0       !
1601.-1700.  .0       !
1701.-1800.  .0       !
1801.-1900.  .0       !
1901.-2000.  .0       !
2001.-2100.  .0       !
2101.-2200.  .0       !
2201.-2300.  .0       !
2301.-2400.  .0       !
2401.-2500.  .0       !
2501.-2600.  .0       !
2601.-2700.  .0       !
2701.-2800.  .0       !
2801.-2900.  .0       !
2901.-3000.  .0       !
                      0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30401001--NICKEL FLUX FURNACE -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 7

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .868E 11 | .814E 11 | .0 | .0 | .0 | .0 |
| 101.- 200. | .795E 12 | .597E 12 | .0 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .353E 11 | .289E 11 | .193E 11 | .995E 10 | .946E 10 | .865E 10 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .763E 13 | .668E 13 | .522E 13 | .456E 13 | .433E 13 | .376E 13 |
| 1701.-1800. | .421E 13 | .370E 13 | .291E 13 | .259E 13 | .246E 13 | .209E 13 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .128E 14 | .111E 14 | .815E 13 | .716E 13 | .680E 13 | .586E 13 |

SCC = 30401001--NICKEL FLUX FURNACE -NO CONTROL EQUIPMENT -TOT RECS = 7

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .353E 11 | .289E 11 | .193E 11 | .995E 10 | .946E 10 | .865E 10 |
| 34 | .127E 14 | .111E 14 | .813E 13 | .715E 13 | .679E 13 | .585E 13 |
| | .128E 14 | .111E 14 | .815E 13 | .716E 13 | .680E 13 | .586E 13 |

CC = 30401001--NICKEL FLUX FURNACE -- -NO CONTROL EQUIPMENT -SIC= ) -TOTAL RECS = 7

```
TEMP RANGE   COUNT
                      ----------------------------------------------------------------------------------------------------
   0.- 100.  .814E 11 !H
 101.- 200.  .597E 12 !HHHHH
 201.- 300.  .0       !
 301.- 400.  .0       !
 401.- 500.  .0       !
 501.- 600.  .0       !
 601.- 700.  .289E 11 !H
 701.- 800.  .0       !
 801.- 900.  .0       !
 901.-1000.  .0       !
1001.-1100.  .0       !
1101.-1200.  .0       !
1201.-1300.  .0       !
1301.-1400.  .0       !
1401.-1500.  .0       !
1501.-1600.  .0       !
1601.-1700.  .668E 13 !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
1701.-1800.  .370E 13 !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
1801.-1900.  .0       !
1901.-2000.  .0       !
2001.-2100.  .0       !
2101.-2200.  .0       !
2201.-2300.  .0       !
2301.-2400.  .0       !
2401.-2500.  .0       !
2501.-2600.  .0       !
2601.-2700.  .0       !
2701.-2800.  .0       !
2801.-2900.  .0       !
2901.-3000.  .0       !
                      0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30401001--NICKEL FLUX FURNACE -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 1

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .218E 11 | .164E 11 | .805E 10 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .218E 11 | .164E 11 | .805E 10 | .0 | .0 | .0 |

SCC = 30401001--NICKEL FLUX FURNACE -WITH CONTROL EQUIPMENT -TOT RECS = 1

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .218E 11 | .164E 11 | .805E 10 | .0 | .0 | .0 |
| | .218E 11 | .164E 11 | .805E 10 | .0 | .0 | .0 |

CC =30401001--NICKEL FLUX FURNACE ---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 1

| TEMP RANGE | COUNT |
|---|---|
| 0.- 100. | .0 |
| 101.- 200. | .164E 11 |
| 201.- 300. | .0 |
| 301.- 400. | .0 |
| 401.- 500. | .0 |
| 501.- 600. | .0 |
| 601.- 700. | .0 |
| 701.- 800. | .0 |
| 801.- 900. | .0 |
| 901.-1000. | .0 |
| 1001.-1100. | .0 |
| 1101.-1200. | .0 |
| 1201.-1300. | .0 |
| 1301.-1400. | .0 |
| 1401.-1500. | .0 |
| 1501.-1600. | .0 |
| 1601.-1700. | .0 |
| 1701.-1800. | .0 |
| 1801.-1900. | .0 |
| 1901.-2000. | .0 |
| 2001.-2100. | .0 |
| 2101.-2200. | .0 |
| 2201.-2300. | .0 |
| 2301.-2400. | .0 |
| 2401.-2500. | .0 |
| 2501.-2600. | .0 |
| 2601.-2700. | .0 |
| 2701.-2800. | .0 |
| 2801.-2900. | .0 |
| 2901.-3000. | .0 |

SCC= 30401001--NICKEL FLUX FURNACE -TOTAL SCC -SIC = 0 -TOT RECS = 8

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .868E 11 | .814E 11 | .0 | .0 | .0 | .0 |
| 101.- 200. | .816E 12 | .614E 12 | .805E 10 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .353E 11 | .289E 11 | .193E 11 | .995E 10 | .946E 10 | .865E 10 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .763E 13 | .668E 13 | .522E 13 | .456E 13 | .433E 13 | .376E 13 |
| 1701.-1800. | .421E 13 | .370E 13 | .291E 13 | .259E 13 | .246E 13 | .209E 13 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .128E 14 | .111E 14 | .816E 13 | .716E 13 | .680E 13 | .586E 13 |

SCC = 30401001--NICKEL FLUX FURNACE -TOTAL SCC -TOT RECS = 8

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .571E 11 | .453E 11 | .274E 11 | .995E 10 | .946E 10 | .865E 10 |
| 34 | .127E 14 | .111E 14 | .813E 13 | .715E 13 | .679E 13 | .585E 13 |
| | .128E 14 | .111E 14 | .816E 13 | .716E 13 | .680E 13 | .586E 13 |

CC 30401001--NICKEL FLUX FURNACE --TOTAL SCC -SIC = 0 -TOT RECS = 8

```
EMP RANGE    COUNT

                        ---------------------------------------------------------------------------------------------------
   0.- 100.  .814E 11  !H
 101.- 200.  .614E 12  !HHHHHH
 201.- 300.  .0        !
 301.- 400.  .0        !
 401.- 500.  .0        !
 501.- 600.  .0        !
 601.- 700.  .289E 11  !H
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .668E 13  !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
1701.-1800.  .370E 13  !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30401099--NICKEL OTHER/NOT CLASSIFIED -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 8

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .176E 11 | .165E 11 | .134E 11 | .0 | .0 | .0 |
| 101.- 200. | .510E 11 | .383E 11 | .188E 11 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .445E 11 | .373E 11 | .0 | .170E 11 | .162E 11 | .0 |
| 901.-1000. | .476E 11 | .402E 11 | .0 | .196E 11 | .187E 11 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .437E 11 | .386E 11 | .306E 11 | .277E 11 | .263E 11 | .219E 11 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .204E 12 | .171E 12 | .628E 11 | .643E 11 | .612E 11 | .219E 11 |

SCC = 30401099--NICKEL OTHER/NOT CLASSIFIED -NO CONTROL EQUIPMENT -TOT RECS = 8

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 28 | .448E 11 | .376E 11 | .192E 09 | .170E 11 | .162E 11 | .0 |
| 33 | .160E 12 | .133E 12 | .626E 11 | .473E 11 | .449E 11 | .219E 11 |
| | .204E 12 | .171E 12 | .628E 11 | .643E 11 | .612E 11 | .219E 11 |

CC = 30401099--NICKEL OTHER/NOT CLASSIFIED-- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 8

```
TEMP RANGE   COUNT
                      ----------------------------------------------------------------------------------------------------
   0.- 100.  .165E 11 !H
 101.- 200.  .383E 11 !H
 201.- 300.  .0       !
 301.- 400.  .0       !
 401.- 500.  .0       !
 501.- 600.  .0       !
 601.- 700.  .0       !
 701.- 800.  .0       !
 801.- 900.  .373E 11 !H
 901.-1000.  .402E 11 !H
1001.-1100.  .0       !
1101.-1200.  .0       !
1201.-1300.  .0       !
1301.-1400.  .0       !
1401.-1500.  .0       !
1501.-1600.  .0       !
1601.-1700.  .0       !
1701.-1800.  .0       !
1801.-1900.  .386E 11 !H
1901.-2000.  .0       !
2001.-2100.  .0       !
2101.-2200.  .0       !
2201.-2300.  .0       !
2301.-2400.  .0       !
2401.-2500.  .0       !
2501.-2600.  .0       !
2601.-2700.  .0       !
2701.-2800.  .0       !
2801.-2900.  .0       !
2901.-3000.  .0       !
                      0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30401099--NICKEL OTHER/NOT CLASSIFIED -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 7

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .337E 11 | .316E 11 | .258E 11 | .0 | .0 | .0 |
| 101.- 200. | .254E 12 | .224E 12 | .102E 12 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .380E 11 | .292E 11 | .162E 11 | .398E 09 | .378E 09 | .345E 09 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .326E 12 | .285E 12 | .144E 12 | .398E 09 | .378E 09 | .345E 09 |

SCC = 30401099--NICKEL OTHER/NOT CLASSIFIED -WITH CONTROL EQUIPMENT -TOT RECS = 7

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .175E 12 | .148E 12 | .583E 11 | .146E 09 | .139E 09 | .127E 09 |
| 34 | .120E 12 | .112E 12 | .727E 11 | .0 | .0 | .0 |
| 99 | .314E 11 | .241E 11 | .133E 11 | .251E 09 | .239E 09 | .218E 09 |
| | .326E 12 | .285E 12 | .144E 12 | .398E 09 | .378E 09 | .345E 09 |

CC =30401099--NICKEL OTHER/NOT CLASSIFIED---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 7

```
TEMP RANGE   COUNT
                      ----------------------------------------------------------------------------------------------------
   0.- 100.  .316E 11  !H
 101.- 200.  .224E 12  !HH
 201.- 300.  .0        !
 301.- 400.  .292E 11  !H
 401.- 500.  .0        !
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30401099--NICKEL OTHER/NOT CLASSIFIED -TOTAL SCC -SIC = 0 -TOT RECS = 15

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .513E 11 | .481E 11 | .392E 11 | .0 | .0 | .0 |
| 101.- 200. | .305E 12 | .262E 12 | .121E 12 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .380E 11 | .292E 11 | .162E 11 | .398E 09 | .378E 09 | .345E 09 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .445E 11 | .373E 11 | .0 | .170E 11 | .162E 11 | .0 |
| 901.-1000. | .476E 11 | .402E 11 | .0 | .196E 11 | .187E 11 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .437E 11 | .386E 11 | .306E 11 | .277E 11 | .263E 11 | .219E 11 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .530E 12 | .456E 12 | .207E 12 | .647E 11 | .615E 11 | .222E 11 |

SCC = 30401099--NICKEL OTHER/NOT CLASSIFIED -TOTAL SCC -TOT RECS = 15

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 28 | .448E 11 | .376E 11 | .192E 09 | .170E 11 | .162E 11 | .0 |
| 33 | .334E 12 | .282E 12 | .121E 12 | .475E 11 | .451E 11 | .220E 11 |
| 34 | .120E 12 | .112E 12 | .727E 11 | .0 | .0 | .0 |
| 99 | .314E 11 | .241E 11 | .133E 11 | .251E 09 | .239E 09 | .218E 09 |
| | .530E 12 | .456E 12 | .207E 12 | .647E 11 | .615E 11 | .222E 11 |

CC 30401099--NICKEL OTHER/NOT CLASSIFIED--TOTAL SCC -SIC = 0 -TOT RECS = 15

```
EMP RANGE    COUNT
                     ----------------------------------------------------------------------------------------------------
   0.- 100.  .481E 11  !H
 101.- 200.  .262E 12  !HH
 201.- 300.  .0        !
 301.- 400.  .292E 11  !H
 401.- 500.  .0        !
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .373E 11  !H
 901.-1000.  .402E 11  !H
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .386E 11  !H
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30401101--ZIRCONIUM OXIDE KILN -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 1

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .351E 11 | .264E 11 | .129E 11 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .351E 11 | .264E 11 | .129E 11 | .0 | .0 | .0 |

SCC = 30401101--ZIRCONIUM OXIDE KILN -NO CONTROL EQUIPMENT -TOT RECS = 1

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 39 | .351E 11 | .264E 11 | .129E 11 | .0 | .0 | .0 |
| | .351E 11 | .264E 11 | .129E 11 | .0 | .0 | .0 |

CC = 30401101--ZIRCONIUM OXIDE KILN -- -NO CONTROL EQUIPMENT -SIC= ) -TOTAL RECS = 1

```
TEMP RANGE   COUNT
                      ----------------------------------------------------------------------------------------------------
   0.- 100.  .0       !
 101.- 200.  .264E 11 !H
 201.- 300.  .0       !
 301.- 400.  .0       !
 401.- 500.  .0       !
 501.- 600.  .0       !
 601.- 700.  .0       !
 701.- 800.  .0       !
 801.- 900.  .0       !
 901.-1000.  .0       !
1001.-1100.  .0       !
1101.-1200.  .0       !
1201.-1300.  .0       !
1301.-1400.  .0       !
1401.-1500.  .0       !
1501.-1600.  .0       !
1601.-1700.  .0       !
1701.-1800.  .0       !
1801.-1900.  .0       !
1901.-2000.  .0       !
2001.-2100.  .0       !
2101.-2200.  .0       !
2201.-2300.  .0       !
2301.-2400.  .0       !
2401.-2500.  .0       !
2501.-2600.  .0       !
2601.-2700.  .0       !
2701.-2800.  .0       !
2801.-2900.  .0       !
2901.-3000.  .0       !
                      0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30401101--ZIRCONIUM OXIDE KILN -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 0

| TEMP | MAXIMUM | EXPECTED | MINIMUM | MAXIMUM | EXPECTED | MINIMUM |
|---|---|---|---|---|---|---|
| | 60 DEG | 60 DEG | 60 DEG | 300 DEG | 300 DEG | 300 DEG |

0 RECORDS FOR THIS SECTION OF SCC

SCC = 30401101--ZIRCONIUM OXIDE KILN -WITH CONTROL EQUIPMENT -TOT RECS = 0

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| TEMP OUTSIDE | CURVES | 50.0 | | | | |
| TEMP OUTSIDE | CURVES | 50.0 | | | | |
| TEMP OUTSIDE | CURVES | 50.0 | | | | |

SCC= 30401199--ZIRCONIUM OTHER/NOT CLASSIFIED -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 1

| | | | | | | |
|---|---|---|---|---|---|---|
| TEMP | MAXIMUM | EXPECTED | MINIMUM | MAXIMUM | EXPECTED | MINIMUM |
| | 60 DEG | 60 DEG | 60 DEG | 300 DEG | 300 DEG | 300 DEG |

0 RECORDS FOR THIS SECTION OF SCC

SCC = 30401199--ZIRCONIUM   OTHER/NOT CLASSIFIED -NO CONTROL EQUIPMENT -TOT RECS =   1

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|

SCC= 30401199--ZIRCONIUM OTHER/NOT CLASSIFIED -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 1

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .662E 11 | .504E 11 | .269E 11 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .662E 11 | .504E 11 | .269E 11 | .0 | .0 | .0 |

SCC = 30401199--ZIRCONIUM OTHER/NOT CLASSIFIED -WITH CONTROL EQUIPMENT -TOT RECS = 1

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 99 | .662E 11 | .504E 11 | .269E 11 | .0 | .0 | .0 |
| | .662E 11 | .504E 11 | 269E 11 | .0 | .0 | .0 |

CC =30401199--ZIRCONIUM OTHER/NOT CLASSIFIED---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 1

```
TEMP RANGE    COUNT
                       ------------------------------------------------------------------------------------------------------
   0.- 100.   .0       !
 101.- 200.   .0       !
 201.- 300.   .504E 11 !H
 301.- 400.   .0       !
 401.- 500.   .0       !
 501.- 600.   .0       !
 601.- 700.   .0       !
 701.- 800.   .0       !
 801.- 900.   .0       !
 901.-1000.   .0       !
1001.-1100.   .0       !
1101.-1200.   .0       !
1201.-1300.   .0       !
1301.-1400.   .0       !
1401.-1500.   .0       !
1501.-1600.   .0       !
1601.-1700.   .0       !
1701.-1800.   .0       !
1801.-1900.   .0       !
1901.-2000.   .0       !
2001.-2100.   .0       !
2101.-2200.   .0       !
2201.-2300.   .0       !
2301.-2400.   .0       !
2401.-2500.   .0       !
2501.-2600.   .0       !
2601.-2700.   .0       !
2701.-2800.   .0       !
2801.-2900.   .0       !
2901.-3000.   .0       !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30402001--FURNACE ELEC CALCINATION -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 0

| | | | | | | |
|---|---|---|---|---|---|---|
| TEMP | MAXIMUM | EXPECTED | MINIMUM | MAXIMUM | EXPECTED | MINIMUM |
| | 60 DEG | 60 DEG | 60 DEG | 300 DEG | 300 DEG | 300 DEG |

0 RECORDS FOR THIS SECTION OF SCC

SCC = 30402001--FURNACE ELECCALCINATION -NO CONTROL EQUIPMENT -TOT RECS = 0

| SIC | MAXIMUM | EXPECTED | MINIMUM | MAXIMUM | EXPECTED | MINIMUM |
|---|---|---|---|---|---|---|
| | 60 DEG | 60 DEG | 60 DEG | 300 DEG | 300 DEG | 300 DEG |

SCC= 30402001--FURNACE ELEC CALCINATION -WITH CONTROL EQUIPMENT -SIC = ) -TOT RECS = 14

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .424E 12 | .318E 12 | .160E 12 | .0 | .0 | .0 |
| 301.- 400. | .859E 11 | .664E 11 | .375E 11 | .315E 10 | .300E 10 | .274E 10 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .511E 12 | .436E 12 | .322E 12 | .241E 12 | .229E 12 | .209E 12 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .354E 11 | .311E 11 | .244E 11 | .215E 11 | .204E 11 | .175E 11 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .106E 13 | .852E 12 | .544E 12 | .266E 12 | .253E 12 | .229E 12 |

SCC = 30402001--FURNACE ELECCALCINATION -WITH CONTROL EQUIPMENT -TOT RECS = 14

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 28 | .459E 12 | .349E 12 | .185E 12 | .215E 11 | .204E 11 | .175E 11 |
| 33 | .597E 12 | .503E 12 | .360E 12 | .244E 12 | .232E 12 | .211E 12 |
| | .106E 13 | .852E 12 | .544E 12 | .266E 12 | .253E 12 | .229E 12 |

CC =30402001--FURNACE ELEC CALCINATION ---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 14

```
TEMP RANGE     COUNT
                         ----------------------------------------------------------------------------------------------------
   0.- 100.   .0         !
 101.- 200.   .0         !
 201.- 300.   .318E 12   !HHH
 301.- 400.   .664E 11   !H
 401.- 500.   .0         !
 501.- 600.   .0         !
 601.- 700.   .0         !
 701.- 800.   .0         !
 801.- 900.   .0         !
 901.-1000.   .0         !
1001.-1100.   .0         !
1101.-1200.   .436E 12   !HHHH
1201.-1300.   .0         !
1301.-1400.   .0         !
1401.-1500.   .0         !
1501.-1600.   .0         !
1601.-1700.   .0         !
1701.-1800.   .311E 11   !H
1801.-1900.   .0         !
1901.-2000.   .0         !
2001.-2100.   .0         !
2101.-2200.   .0         !
2201.-2300.   .0         !
2301.-2400.   .0         !
2401.-2500.   .0         !
2501.-2600.   .0         !
2601.-2700.   .0         !
2701.-2800.   .0         !
2801.-2900.   .0         !
2901.-3000.   .0         !
                         0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30402002--FURNACE ELEC MIXING -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 3

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .375E 10 | .352E 10 | .287E 10 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .375E 10 | .352E 10 | .287E 10 | .0 | .0 | .0 |

SCC = 30402002--FURNACE ELECMIXING -NO CONTROL EQUIPMENT -TOT RECS = 3

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 36 | .375E 10 | .352E 10 | .287E 10 | .0 | .0 | .0 |
| | .375E 10 | .352E 10 | .287E 10 | .0 | .0 | .0 |

CC = 30402002--FURNACE ELEC MIXING -- -NO CONTROL EQUIPMENT -SIC= ) -TOTAL RECS = 3

| TEMP RANGE | COUNT | |
|---|---|---|
| 0.= 100. | .352E 10 | !H |
| 101.= 200. | .0 | ! |
| 201.= 300. | .0 | ! |
| 301.= 400. | .0 | ! |
| 401.= 500. | .0 | ! |
| 501.= 600. | .0 | ! |
| 601.= 700. | .0 | ! |
| 701.= 800. | .0 | ! |
| 801.= 900. | .0 | ! |
| 901.=1000. | .0 | ! |
| 1001.=1100. | .0 | ! |
| 1101.=1200. | .0 | ! |
| 1201.=1300. | .0 | ! |
| 1301.=1400. | .0 | ! |
| 1401.=1500. | .0 | ! |
| 1501.=1600. | .0 | ! |
| 1601.=1700. | .0 | ! |
| 1701.=1800. | .0 | ! |
| 1801.=1900. | .0 | ! |
| 1901.=2000. | .0 | ! |
| 2001.=2100. | .0 | ! |
| 2101.=2200. | .0 | ! |
| 2201.=2300. | .0 | ! |
| 2301.=2400. | .0 | ! |
| 2401.=2500. | .0 | ! |
| 2501.=2600. | .0 | ! |
| 2601.=2700. | .0 | ! |
| 2701.=2800. | .0 | ! |
| 2801.=2900. | .0 | ! |
| 2901.=3000. | .0 | ! |

0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100

SCC= 30402002--FURNACE ELEC MIXING -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 8

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.= 100. | .637E 10 | .598E 10 | .487E 10 | .0 | .0 | .0 |
| 101.= 200. | .373E 11 | .279E 11 | .137E 11 | .0 | .0 | .0 |
| 201.= 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.= 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.= 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.= 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.= 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.= 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.= 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.=1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.=1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.=1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.=1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.=1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.=1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.=1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.=1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.=1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.=1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.=2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.=2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.=2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.=2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.=2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.=2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.=2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.=2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.=2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.=2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.=3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .437E 11 | .338E 11 | .185E 11 | .0 | .0 | .0 |

SCC = 30402002--FURNACE ELECMIXING -WITH CONTROL EQUIPMENT -TOT RECS = 8

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .424E 10 | .398E 10 | .324E 10 | .0 | .0 | .0 |
| 33 | .394E 11 | .298E 11 | .153E 11 | .0 | .0 | .0 |
| | .437E 11 | .338E 11 | .185E 11 | .0 | .0 | .0 |

CC =30402002--FURNACE ELEC MIXING ---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 8

```
TEMP RANGE    COUNT
                         ----------------------------------------------------------------------------------------------------
    0.= 100.   .598E 10  !H
  101.= 200.   .279E 11  !H
  201.= 300.   .0        !
  301.= 400.   .0        !
  401.= 500.   .0        !
  501.= 600.   .0        !
  601.= 700.   .0        !
  701.= 800.   .0        !
  801.= 900.   .0        !
  901.=1000.   .0        !
 1001.=1100.   .0        !
 1101.=1200.   .0        !
 1201.=1300.   .0        !
 1301.=1400.   .0        !
 1401.=1500.   .0        !
 1501.=1600.   .0        !
 1601.=1700.   .0        !
 1701.=1800.   .0        !
 1801.=1900.   .0        !
 1901.=2000.   .0        !
 2001.=2100.   .0        !
 2101.=2200.   .0        !
 2201.=2300.   .0        !
 2301.=2400.   .0        !
 2401.=2500.   .0        !
 2501.=2600.   .0        !
 2601.=2700.   .0        !
 2701.=2800.   .0        !
 2801.=2900.   .0        !
 2901.=3000.   .0        !
                         0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30402002--FURNACE ELEC MIXING -TOTAL SCC -SIC = 0 -TOT RECS = 11

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .101E 11 | .950E 10 | .774E 10 | .0 | .0 | .0 |
| 101.- 200. | .373E 11 | .279E 11 | .137E 11 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .476E 11 | .373E 11 | .214E 11 | .0 | .0 | .0 |

SCC = 30402002--FURNACE ELECMIXING -TOTAL SCC -TOT RECS = 11

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .426E 10 | .398E 10 | .324E 10 | .0 | .0 | .0 |
| 36 | .432E 11 | .334E 11 | .182E 11 | .0 | .0 | .0 |
| | .474E 11 | .373E 11 | .214E 11 | .0 | .0 | .0 |

CC 30402002--FURNACE ELEC MIXING --TOTAL SCC -SIC = 0 -TOT RECS = 11

| EMP RANGE | COUNT | |
|---|---|---|
| 0.- 100. | .950E 10 | *H |
| 101.- 200. | .279E 11 | *H |
| 201.- 300. | .0 | * |
| 301.- 400. | .0 | * |
| 401.- 500. | .0 | * |
| 501.- 600. | .0 | * |
| 601.- 700. | .0 | * |
| 701.- 800. | .0 | * |
| 801.- 900. | .0 | * |
| 901.-1000. | .0 | * |
| 1001.-1100. | .0 | * |
| 1101.-1200. | .0 | * |
| 1201.-1300. | .0 | * |
| 1301.-1400. | .0 | * |
| 1401.-1500. | .0 | * |
| 1501.-1600. | .0 | * |
| 1601.-1700. | .0 | * |
| 1701.-1800. | .0 | * |
| 1801.-1900. | .0 | * |
| 1901.-2000. | .0 | * |
| 2001.-2100. | .0 | * |
| 2101.-2200. | .0 | * |
| 2201.-2300. | .0 | * |
| 2301.-2400. | .0 | * |
| 2401.-2500. | .0 | * |
| 2501.-2600. | .0 | * |
| 2601.-2700. | .0 | * |
| 2701.-2800. | .0 | * |
| 2801.-2900. | .0 | * |
| 2901.-3000. | .0 | * |

0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100

SCC= 30402003--FURNACE ELEC PITCH TREATING -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 2

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.= 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.= 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.= 300. | .417E 12 | .316E 12 | .165E 12 | .0 | .0 | .0 |
| 301.= 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.= 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.= 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.= 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.= 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.= 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.=1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.=1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.=1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.=1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.=1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.=1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.=1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.=1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.=1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.=1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.=2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.=2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.=2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.=2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.=2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.=2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.=2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.=2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.=2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.=2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.=3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .417E 12 | .316E 12 | .165E 12 | .0 | .0 | .0 |

SCC = 30402003--FURNACE ELECPITCH TREATING -NO CONTROL EQUIPMENT -TOT RECS = 2

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .374E 12 | .283E 12 | .148E 12 | .0 | .0 | .0 |
| 36 | .424E 11 | .322E 11 | .171E 11 | .0 | .0 | .0 |
| | .417E 12 | .316E 12 | .165E 12 | .0 | .0 | .0 |

SCC = 30402003--FURNACE ELEC PITCH TREATING -- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 2

```
TEMP RANGE     COUNT
                        ---------------------------------------------------------------------------------------------------
   0.- 100.   .0        !
 101.- 200.   .0        !
 201.- 300.   .316E 12  !HHH
 301.- 400.   .0        !
 401.- 500.   .0        !
 501.- 600.   .0        !
 601.- 700.   .0        !
 701.- 800.   .0        !
 801.- 900.   .0        !
 901.-1000.   .0        !
1001.-1100.   .0        !
1101.-1200.   .0        !
1201.-1300.   .0        !
1301.-1400.   .0        !
1401.-1500.   .0        !
1501.-1600.   .0        !
1601.-1700.   .0        !
1701.-1800.   .0        !
1801.-1900.   .0        !
1901.-2000.   .0        !
2001.-2100.   .0        !
2101.-2200.   .0        !
2201.-2300.   .0        !
2301.-2400.   .0        !
2401.-2500.   .0        !
2501.-2600.   .0        !
2601.-2700.   .0        !
2701.-2800.   .0        !
2801.-2900.   .0        !
2901.-3000.   .0        !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90--------100
```

SCC= 30402003--FURNACE ELEC PITCH TREATING -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 6

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .398E 07 | .373E 07 | .304E 07 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .398E 07 | .373E 07 | .304E 07 | .0 | .0 | .0 |

SCC = 30402003--FURNACE ELECPITCH TREATING -WITH CONTROL EQUIPMENT -TOT RECS = 6

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 29 | .398E 07 | .373E 07 | .304E 07 | .0 | .0 | .0 |
| | .398E 07 | .373E 07 | .304E 07 | .0 | .0 | .0 |

CC =30402003--FURNACE ELEC PITCH TREATING ---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 6

| TEMP RANGE | COUNT |
|---|---|
| 0.- 100. | .373E 07 |
| 101.- 200. | .0 |
| 201.- 300. | .0 |
| 301.- 400. | .0 |
| 401.- 500. | .0 |
| 501.- 600. | .0 |
| 601.- 700. | .0 |
| 701.- 800. | .0 |
| 801.- 900. | .0 |
| 901.-1000. | .0 |
| 1001.-1100. | .0 |
| 1101.-1200. | .0 |
| 1201.-1300. | .0 |
| 1301.-1400. | .0 |
| 1401.-1500. | .0 |
| 1501.-1600. | .0 |
| 1601.-1700. | .0 |
| 1701.-1800. | .0 |
| 1801.-1900. | .0 |
| 1901.-2000. | .0 |
| 2001.-2100. | .0 |
| 2101.-2200. | .0 |
| 2201.-2300. | .0 |
| 2301.-2400. | .0 |
| 2401.-2500. | .0 |
| 2501.-2600. | .0 |
| 2601.-2700. | .0 |
| 2701.-2800. | .0 |
| 2801.-2900. | .0 |
| 2901.-3000. | .0 |

SCC= 30402003--FURNACE ELEC PITCH TREATING -TOTAL SCC -SIC = 0 -TOT RECS = 8

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .398E 07 | .373E 07 | .304E 07 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .417E 12 | .316E 12 | .165E 12 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .417E 12 | .316E 12 | .165E 12 | .0 | .0 | .0 |

SCC = 30402003--FURNACE ELECPITCH TREATING -TOTAL SCC -TOT RECS = 8

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 29 | .398E 07 | .373E 07 | .304E 07 | .0 | .0 | .0 |
| 33 | .374E 12 | .283E 12 | .148E 12 | .0 | .0 | .0 |
| 36 | .424E 11 | .322E 11 | .171E 11 | .0 | .0 | .0 |
| | .417E 12 | .316E 12 | .165E 12 | .0 | .0 | .0 |

CC 30402003--FURNACE ELEC PITCH TREATING --TOTAL SCC -SIC = 0 -TOT RECS = 8

```
EMP RANGE    COUNT
                   ----------------------------------------------------------------------------------------------------
   0.- 100.  .373E 07  !
 101.- 200.  .0        !
 201.- 300.  .316E 12  !HHH
 301.- 400.  .0        !
 401.- 500.  .0        !
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30402004--FURNACE ELEC BAKING FURNACE -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 7

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .220E 12 | .206E 12 | .168E 12 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .770E 10 | .583E 10 | .305E 10 | .0 | .0 | .0 |
| 301.- 400. | .634E 09 | .490E 09 | .277E 09 | .233E 08 | .221E 08 | .202E 08 |
| 401.- 500. | .227E 13 | .179E 13 | .723E 11 | .251E 12 | .238E 12 | .112E 11 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .174E 10 | .142E 10 | .945E 09 | .477E 09 | .453E 09 | .414E 09 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .250E 13 | .200E 13 | .244E 12 | .251E 12 | .239E 12 | .117E 11 |

SCC = 30402004--FURNACE ELECBAKING FURNACE -NO CONTROL EQUIPMENT -TOT RECS = 7

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .770E 10 | .583E 10 | .305E 10 | .0 | .0 | .0 |
| 34 | .634E 09 | .490E 09 | .277E 09 | .233E 08 | .221E 08 | .202E 08 |
| 36 | .249E 13 | .199E 13 | .241E 12 | .251E 12 | .239E 12 | .117E 11 |
| | .250E 13 | .200E 13 | .244E 12 | .251E 12 | .239E 12 | .117E 11 |

CC = 30402004--FURNACE ELEC BAKING FURNACE -- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 7

```
TEMP RANGE     COUNT
                        ----------------------------------------------------------------------------------------------------
    0.- 100.  .206E 12  !HH
  101.- 200.  .0        !
  201.- 300.  .583E 10  !H
  301.- 400.  .490E 09  !
  401.- 500.  .179E 13  !HHHHHHHHHHHHHHHHH
  501.- 600.  .0        !
  601.- 700.  .142E 10  !H
  701.- 800.  .0        !
  801.- 900.  .0        !
  901.-1000.  .0        !
 1001.-1100.  .0        !
 1101.-1200.  .0        !
 1201.-1300.  .0        !
 1301.-1400.  .0        !
 1401.-1500.  .0        !
 1501.-1600.  .0        !
 1601.-1700.  .0        !
 1701.-1800.  .0        !
 1801.-1900.  .0        !
 1901.-2000.  .0        !
 2001.-2100.  .0        !
 2101.-2200.  .0        !
 2201.-2300.  .0        !
 2301.-2400.  .0        !
 2401.-2500.  .0        !
 2501.-2600.  .0        !
 2601.-2700.  .0        !
 2701.-2800.  .0        !
 2801.-2900.  .0        !
 2901.-3000.  .0        !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30402004--FURNACE ELEC BAKING FURNACE -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 7

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .195E 10 | .183E 10 | .976E 09 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .306E 11 | .239E 11 | .182E 08 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .227E 10 | .216E 10 | .541E 06 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .740E 11 | .602E 11 | .395E 11 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .186E 11 | .176E 11 | .161E 11 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .107E 12 | .859E 11 | .405E 11 | .208E 11 | .198E 11 | .161E 11 |

SCC = 30402004--FURNACE ELECBAKING FURNACE -WITH CONTROL EQUIPMENT -TOT RECS = 7

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .306E 11 | .239E 11 | .0 | .227E 10 | .216E 10 | .0 |
| 36 | .760E 11 | .621E 11 | .405E 11 | .186E 11 | .176E 11 | .161E 11 |
| | .107E 12 | .859E 11 | .405E 11 | .208E 11 | .198E 11 | .161E 11 |

CC =30402004--FURNACE ELEC BAKING FURNACE ---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 7

```
TEMP RANGE    COUNT
                     ----------------------------------------------------------------------------------------------------
   0.- 100.   .0        !
 101.- 200.   .183E 10  !H
 201.- 300.   .0        !
 301.- 400.   .239E 11  !H
 401.- 500.   .0        !
 501.- 600.   .0        !
 601.- 700.   .602E 11  !H
 701.- 800.   .0        !
 801.- 900.   .0        !
 901.-1000.   .0        !
1001.-1100.   .0        !
1101.-1200.   .0        !
1201.-1300.   .0        !
1301.-1400.   .0        !
1401.-1500.   .0        !
1501.-1600.   .0        !
1601.-1700.   .0        !
1701.-1800.   .0        !
1801.-1900.   .0        !
1901.-2000.   .0        !
2001.-2100.   .0        !
2101.-2200.   .0        !
2201.-2300.   .0        !
2301.-2400.   .0        !
2401.-2500.   .0        !
2501.-2600.   .0        !
2601.-2700.   .0        !
2701.-2800.   .0        !
2801.-2900.   .0        !
2901.-3000.   .0        !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30402004--FURNACE ELEC BAKING FURNACE -TOTAL SCC -SIC = 0 -TOT RECS = 14

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .220E 12 | .206E 12 | .168E 12 | .0 | .0 | .0 |
| 101.- 200. | .195E 10 | .183E 10 | .976E 09 | .0 | .0 | .0 |
| 201.- 300. | .770E 10 | .583E 10 | .305E 10 | .0 | .0 | .0 |
| 301.- 400. | .313E 11 | .244E 11 | .295E 09 | .230E 10 | .218E 10 | .208E 08 |
| 401.- 500. | .227E 13 | .179E 13 | .723E 11 | .251E 12 | .238E 12 | .112E 11 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .758E 11 | .616E 11 | .404E 11 | .190E 11 | .181E 11 | .165E 11 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .261E 13 | .209E 13 | .285E 12 | .272E 12 | .258E 12 | .278E 11 |

SCC = 30402004--FURNACE ELECBAKING FURNACE -TOTAL SCC -TOT RECS = 14

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .383E 11 | .297E 11 | .305E 10 | .227E 10 | .216E 10 | .0 |
| 34 | .634E 09 | .490E 09 | .277E 09 | .233E 08 | .221E 08 | .202E 08 |
| 36 | .257E 13 | .206E 13 | .282E 12 | .270E 12 | .256E 12 | .278E 11 |
| | .261E 13 | .209E 13 | .285E 12 | .272E 12 | .258E 12 | .278E 11 |

CC 30402004--FURNACE ELEC BAKING FURNACE --TOTAL SCC -SIC = 0 -TOT RECS = 14

```
EMP RANGE    COUNT

                          ----------------------------------------------------------------------------------------------------
   0.- 100.  .206E 12    !HH
 101.- 200.  .183E 10    !H
 201.- 300.  .583E 10    !H
 301.- 400.  .244E 11    !H
 401.- 500.  .179E 13    !HHHHHHHHHHHHHHHHH
 501.- 600.  .0          !
 601.- 700.  .616E 11    !H
 701.- 800.  .0          !
 801.- 900.  .0          !
 901.-1000.  .0          !
1001.-1100.  .0          !
1101.-1200.  .0          !
1201.-1300.  .0          !
1301.-1400.  .0          !
1401.-1500.  .0          !
1501.-1600.  .0          !
1601.-1700.  .0          !
1701.-1800.  .0          !
1801.-1900.  .0          !
1901.-2000.  .0          !
2001.-2100.  .0          !
2101.-2200.  .0          !
2201.-2300.  .0          !
2301.-2400.  .0          !
2401.-2500.  .0          !
2501.-2600.  .0          !
2601.-2700.  .0          !
2701.-2800.  .0          !
2801.-2900.  .0          !
2901.-3000.  .0          !
                         0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30402099--FURNACE ELEC OTHER/NOT CLASSIFIED -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 5

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .394E 07 | .369E 07 | .301E 07 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .583E 08 | .459E 08 | .275E 08 | .657E 07 | .624E 07 | .571E 07 |
| 501.- 600. | .633E 08 | .508E 08 | .0 | .122E 08 | .115E 08 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .737E 08 | .607E 08 | .412E 08 | .226E 08 | .215E 08 | .196E 08 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .103E 09 | .869E 08 | .626E 08 | .431E 08 | .411E 08 | .374E 08 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .302E 09 | .248E 09 | .134E 09 | .845E 08 | .803E 08 | .628E 08 |

SCC = 30402099--FURNACE ELECOTHER/NOT CLASSIFIED -NO CONTROL EQUIPMENT -TOT RECS = 5

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .195E 09 | .157E 09 | .686E 08 | .413E 08 | .393E 08 | .253E 08 |
| 36 | .107E 09 | .906E 08 | .656E 08 | .431E 08 | .411E 08 | .374E 08 |
| | .302E 09 | .248E 09 | .134E 09 | .845E 08 | .803E 08 | .628E 08 |

CC = 30402099--FURNACE ELEC OTHER/NOT CLASSIFIED-- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 5

| TEMP RANGE | COUNT |
|---|---|
| 0.- 100. | .369E 07 |
| 101.- 200. | .0 |
| 201.- 300. | .0 |
| 301.- 400. | .0 |
| 401.- 500. | .459E 08 |
| 501.- 600. | .508E 08 |
| 601.- 700. | .0 |
| 701.- 800. | .607E 08 |
| 801.- 900. | .0 |
| 901.-1000. | .0 |
| 1001.-1100. | .869E 08 |
| 1101.-1200. | .0 |
| 1201.-1300. | .0 |
| 1301.-1400. | .0 |
| 1401.-1500. | .0 |
| 1501.-1600. | .0 |
| 1601.-1700. | .0 |
| 1701.-1800. | .0 |
| 1801.-1900. | .0 |
| 1901.-2000. | .0 |
| 2001.-2100. | .0 |
| 2101.-2200. | .0 |
| 2201.-2300. | .0 |
| 2301.-2400. | .0 |
| 2401.-2500. | .0 |
| 2501.-2600. | .0 |
| 2601.-2700. | .0 |
| 2701.-2800. | .0 |
| 2801.-2900. | .0 |
| 2901.-3000. | .0 |

0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100

SCC= 30402099--FURNACE ELEC OTHER/NOT CLASSIFIED -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 10

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .239E 11 | .224E 11 | .512E 10 | .0 | .0 | .0 |
| 101.- 200. | .392E 11 | .298E 11 | .147E 11 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .527E 11 | .419E 11 | .257E 11 | .800E 10 | .760E 10 | .695E 10 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .116E 12 | .941E 11 | .456E 11 | .800E 10 | .760E 10 | .695E 10 |

SCC = 30402099--FURNACE ELECOTHER/NOT CLASSIFIED -WITH CONTROL EQUIPMENT -TOT RECS = 10

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .899E 11 | .699E 11 | .395E 11 | .800E 10 | .760E 10 | .695E 10 |
| 36 | .258E 11 | .242E 11 | .610E 10 | .0 | .0 | .0 |
| | .116E 12 | .941E 11 | .456E 11 | .800E 10 | .760E 10 | .695E 10 |

CC =30402099--FURNACE ELEC OTHER/NOT CLASSIFIED---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 10

```
TEMP RANGE   COUNT
                      ------------------------------------------------------------------------------------------------
   0.- 100.  .224E 11 !H
 101.- 200.  .298E 11 !H
 201.- 300.  .0       !
 301.- 400.  .0       !
 401.- 500.  .419E 11 !H
 501.- 600.  .0       !
 601.- 700.  .0       !
 701.- 800.  .0       !
 801.- 900.  .0       !
 901.-1000.  .0       !
1001.-1100.  .0       !
1101.-1200.  .0       !
1201.-1300.  .0       !
1301.-1400.  .0       !
1401.-1500.  .0       !
1501.-1600.  .0       !
1601.-1700.  .0       !
1701.-1800.  .0       !
1801.-1900.  .0       !
1901.-2000.  .0       !
2001.-2100.  .0       !
2101.-2200.  .0       !
2201.-2300.  .0       !
2301.-2400.  .0       !
2401.-2500.  .0       !
2501.-2600.  .0       !
2601.-2700.  .0       !
2701.-2800.  .0       !
2801.-2900.  .0       !
2901.-3000.  .0       !
                      0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30402099--FURNACE ELEC OTHER/NOT CLASSIFIED -TOTAL SCC -SIC = 0 -TOT RECS = 15

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .239E 11 | .224E 11 | .512E 10 | .0 | .0 | .0 |
| 101.- 200. | .392E 11 | .298E 11 | .147E 11 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .527E 11 | .419E 11 | .258E 11 | .801E 10 | .761E 10 | .696E 10 |
| 501.- 600. | .633E 08 | .508E 08 | .0 | .122E 08 | .115E 08 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .737E 08 | .607E 08 | .412E 08 | .226E 08 | .215E 08 | .196E 08 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .103E 09 | .869E 08 | .626E 08 | .431E 08 | .411E 08 | .374E 08 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .116E 12 | .943E 11 | .457E 11 | .809E 10 | .768E 10 | .702E 10 |

SCC = 30402099--FURNACE ELECOTHER/NOT CLASSIFIED -TOTAL SCC -TOT RECS = 15

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .901E 11 | .700E 11 | .396E 11 | .805E 10 | .764E 10 | .698E 10 |
| 36 | .259E 11 | .243E 11 | .616E 10 | .431E 08 | .411E 08 | .374E 08 |
| | .116E 12 | .943E 11 | .457E 11 | .809E 10 | .768E 10 | .702E 10 |

CC 30402099--FURNACE ELEC OTHER/NOT CLASSIFIED--TOTAL SCC -SIC = 0 -TOT RECS = 15

```
EMP RANGE    COUNT
                      ----------------------------------------------------------------------------------------------------
   0.- 100.  .224E 11 !H
 101.- 200.  .298E 11 !H
 201.- 300.  .0       !
 301.- 400.  .0       !
 401.- 500.  .419E 11 !H
 501.- 600.  .508E 08 !
 601.- 700.  .0       !
 701.- 800.  .607E 08 !
 801.- 900.  .0       !
 901.-1000.  .0       !
1001.-1100.  .869E 08 !
1101.-1200.  .0       !
1201.-1300.  .0       !
1301.-1400.  .0       !
1401.-1500.  .0       !
1501.-1600.  .0       !
1601.-1700.  .0       !
1701.-1800.  .0       !
1801.-1900.  .0       !
1901.-2000.  .0       !
2001.-2100.  .0       !
2101.-2200.  .0       !
2201.-2300.  .0       !
2301.-2400.  .0       !
2401.-2500.  .0       !
2501.-2600.  .0       !
2601.-2700.  .0       !
2701.-2800.  .0       !
2801.-2900.  .0       !
2901.-3000.  .0       !
                      0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30405001--MISC CASTING SPECIFY IN REMARK -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 34

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .240E 13 | .225E 13 | .329E 12 | .0 | .0 | .0 |
| 101.- 200. | .836E 10 | .623E 10 | .307E 10 | .0 | .0 | .0 |
| 201.- 300. | .115E 09 | .873E 08 | .457E 08 | .0 | .0 | .0 |
| 301.- 400. | .364E 12 | .284E 12 | .165E 12 | .270E 11 | .256E 11 | .235E 11 |
| 401.- 500. | .986E 12 | .781E 12 | .474E 12 | .131E 12 | .124E 12 | .114E 12 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .359E 11 | .297E 11 | .204E 11 | .119E 11 | .113E 11 | .103E 11 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .768E 12 | .652E 12 | .475E 12 | .339E 12 | .323E 12 | .294E 12 |
| 1101.-1200. | .792E 12 | .674E 12 | .494E 12 | .361E 12 | .344E 12 | .313E 12 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .536E 13 | .468E 13 | .196E 13 | .870E 12 | .827E 12 | .754E 12 |

SCC = 30405001--MISC CASTINGSPECIFY IN REMARK -NO CONTROL EQUIPMENT -TOT RECS = 34

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .126E 13 | .118E 13 | .330E 12 | .119E 11 | .113E 11 | .103E 11 |
| 34 | .357E 13 | .301E 13 | .161E 13 | .858E 12 | .816E 12 | .744E 12 |
| 35 | .115E 09 | .873E 08 | .457E 08 | .0 | .0 | .0 |
| 36 | .680E 10 | .507E 10 | .249E 10 | .0 | .0 | .0 |
| 37 | .328E 12 | .308E 12 | .0 | .0 | .0 | .0 |
| 38 | .156E 10 | .116E 10 | .576E 09 | .0 | .0 | .0 |
| 99 | .190E 12 | .178E 12 | .194E 11 | .0 | .0 | .0 |
| | .536E 13 | .468E 13 | .196E 13 | .870E 12 | .827E 12 | .754E 12 |

CC = 30405001--MISC CASTING SPECIFY IN REMARK -- -NO CONTROL EQUIPMENT -SIC= ) -TOTAL RECS = 34

```
TEMP RANGE   COUNT
                        ---------------------------------------------------------------------------------
   0.- 100.  .225E 13  !HHHHHHHHHHHHHHHHHHHHHH
 101.- 200.  .623E 10  !H
 201.- 300.  .873E 08  !
 301.- 400.  .284E 12  !HH
 401.- 500.  .781E 12  !HHHHHHH
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .297E 11  !H
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .652E 12  !HHHHHH
1101.-1200.  .674E 12  !HHHHHH
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30405001--MISC CASTING SPECIFY IN REMARK -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 41

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .210E 12 | .197E 12 | .380E 11 | .0 | .0 | .0 |
| 101.- 200. | .437E 11 | .410E 11 | .265E 11 | .0 | .0 | .0 |
| 201.- 300. | .614E 11 | .471E 11 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .315E 12 | .285E 12 | .645E 11 | .0 | .0 | .0 |

SCC = 30405001--MISC CASTINGSPECIFY IN REMARK -WITH CONTROL EQUIPMENT -TOT RECS = 41

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 28 | .500E 10 | .469E 10 | .382E 10 | .0 | .0 | .0 |
| 32 | .117E 11 | .109E 11 | .0 | .0 | .0 | .0 |
| 33 | .758E 11 | .711E 11 | .835E 10 | .0 | .0 | .0 |
| 34 | .522E 11 | .490E 11 | .128E 10 | .0 | .0 | .0 |
| 35 | .430E 11 | .404E 11 | .753E 10 | .0 | .0 | .0 |
| 36 | .743E 10 | .697E 10 | .568E 10 | .0 | .0 | .0 |
| 37 | .207E 10 | .194E 10 | .158E 10 | .0 | .0 | .0 |
| 38 | .986E 09 | .925E 09 | .754E 09 | .0 | .0 | .0 |
| 39 | .614E 11 | .471E 11 | .0 | .0 | .0 | .0 |
| 99 | .554E 11 | .520E 11 | .355E 11 | .0 | .0 | .0 |
| | .315E 12 | .285E 12 | .645E 11 | .0 | .0 | .0 |

CC =30405001--MISC CASTING SPECIFY IN REMARK ---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 41

| TEMP RANGE | COUNT | |
|---|---|---|
| 0.- 100. | .197E 12 | !H |
| 101.- 200. | .410E 11 | !H |
| 201.- 300. | .471E 11 | !H |
| 301.- 400. | .0 | ! |
| 401.- 500. | .0 | ! |
| 501.- 600. | .0 | ! |
| 601.- 700. | .0 | ! |
| 701.- 800. | .0 | ! |
| 801.- 900. | .0 | ! |
| 901.-1000. | .0 | ! |
| 1001.-1100. | .0 | ! |
| 1101.-1200. | .0 | ! |
| 1201.-1300. | .0 | ! |
| 1301.-1400. | .0 | ! |
| 1401.-1500. | .0 | ! |
| 1501.-1600. | .0 | ! |
| 1601.-1700. | .0 | ! |
| 1701.-1800. | .0 | ! |
| 1801.-1900. | .0 | ! |
| 1901.-2000. | .0 | ! |
| 2001.-2100. | .0 | ! |
| 2101.-2200. | .0 | ! |
| 2201.-2300. | .0 | ! |
| 2301.-2400. | .0 | ! |
| 2401.-2500. | .0 | ! |
| 2501.-2600. | .0 | ! |

SCC= 30405001--MISC CASTING SPECIFY IN REMARK -TOTAL SCC -SIC = 0 -TOT RECS = 75

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .261E 13 | .245E 13 | .367E 12 | .0 | .0 | .0 |
| 101.- 200. | .521E 11 | .472E 11 | .296E 11 | .0 | .0 | .0 |
| 201.- 300. | .615E 11 | .471E 11 | .457E 08 | .0 | .0 | .0 |
| 301.- 400. | .364E 12 | .284E 12 | .165E 12 | .270E 11 | .256E 11 | .235E 11 |
| 401.- 500. | .986E 12 | .781E 12 | .474E 12 | .131E 12 | .124E 12 | .114E 12 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .359E 11 | .297E 11 | .204E 11 | .119E 11 | .113E 11 | .103E 11 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .768E 12 | .652E 12 | .475E 12 | .339E 12 | .323E 12 | .294E 12 |
| 1101.-1200. | .792E 12 | .674E 12 | .494E 12 | .361E 12 | .344E 12 | .313E 12 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .567E 13 | .496E 13 | .202E 13 | .870E 12 | .827E 12 | .754E 12 |

SCC = 30405001--MISC CASTINGSPECIFY IN REMARK -TOTAL SCC -TOT RECS = 75

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 28 | .500E 10 | .469E 10 | .382E 10 | .0 | .0 | .0 |
| 32 | .117E 11 | .109E 11 | .0 | .0 | .0 | .0 |
| 33 | .134E 13 | .125E 13 | .339E 12 | .119E 11 | .113E 11 | .103E 11 |
| 34 | .362E 13 | .305E 13 | .161E 13 | .858E 12 | .816E 12 | .744E 12 |
| 35 | .432E 11 | .405E 11 | .758E 10 | .0 | .0 | .0 |
| 36 | .142E 11 | .120E 11 | .817E 10 | .0 | .0 | .0 |
| 37 | .330E 12 | .310E 12 | .158E 10 | .0 | .0 | .0 |
| 38 | .254E 10 | .209E 10 | .133E 10 | .0 | .0 | .0 |
| 39 | .614E 11 | .471E 11 | .0 | .0 | .0 | .0 |
| 99 | .245E 12 | .230E 12 | .548E 11 | .0 | .0 | .0 |
| | .567E 13 | .496E 13 | .202E 13 | .870E 12 | .827E 12 | .754E 12 |

CC 30405001--MISC CASTING SPECIFY IN REMARK --TOTAL SCC -SIC = 0 -TOT RECS = 75

| EMP RANGE | COUNT | |
|---|---|---|
| 0.- 100. | .245E 13 | !HHHHHHHHHHHHHHHHHHHHHHHHH |
| 101.- 200. | .472E 11 | !H |
| 201.- 300. | .471E 11 | !H |
| 301.- 400. | .284E 12 | !HH |
| 401.- 500. | .781E 12 | !HHHHHHH |
| 501.- 600. | .0 | ! |
| 601.- 700. | .0 | ! |
| 701.- 800. | .297E 11 | !H |
| 801.- 900. | .0 | ! |
| 901.-1000. | .0 | ! |
| 1001.-1100. | .652E 12 | !HHHHHH |
| 1101.-1200. | .674E 12 | !HHHHHH |
| 1201.-1300. | .0 | ! |
| 1301.-1400. | .0 | ! |
| 1401.-1500. | .0 | ! |
| 1501.-1600. | .0 | ! |
| 1601.-1700. | .0 | ! |
| 1701.-1800. | .0 | ! |
| 1801.-1900. | .0 | ! |
| 1901.-2000. | .0 | ! |
| 2001.-2100. | .0 | ! |
| 2101.-2200. | .0 | ! |
| 2201.-2300. | .0 | ! |
| 2301.-2400. | .0 | ! |
| 2401.-2500. | .0 | ! |
| 2501.-2600. | .0 | ! |

SCC= 30499999--OTHER/NOT CL SPECIFY IN REMARK -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 254

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .176E 13 | .165E 13 | .621E 12 | .0 | .0 | .0 |
| 101.- 200. | .121E 13 | .105E 13 | .420E 12 | .0 | .0 | .0 |
| 201.- 300. | .499E 12 | .380E 12 | .160E 12 | .0 | .0 | .0 |
| 301.- 400. | .244E 12 | .189E 12 | .802E 11 | .948E 10 | .900E 10 | .628E 10 |
| 401.- 500. | .132E 12 | .104E 12 | .310E 11 | .157E 11 | .149E 11 | .704E 10 |
| 501.- 600. | .682E 11 | .548E 11 | .348E 11 | .138E 11 | .131E 11 | .120E 11 |
| 601.- 700. | .164E 12 | .134E 12 | .0 | .462E 11 | .439E 11 | .0 |
| 701.- 800. | .260E 12 | .214E 12 | .0 | .827E 11 | .787E 11 | .0 |
| 801.- 900. | .108E 11 | .904E 10 | .639E 10 | .412E 10 | .393E 10 | .358E 10 |
| 901.-1000. | .158E 12 | .133E 12 | .950E 11 | .641E 11 | .610E 11 | .556E 11 |
| 1001.-1100. | .107E 12 | .909E 11 | .0 | .473E 11 | .450E 11 | .0 |
| 1101.-1200. | .936E 08 | .799E 08 | .590E 08 | .441E 08 | .420E 08 | .382E 08 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .461E 13 | .401E 13 | .145E 13 | .283E 12 | .270E 12 | .845E 11 |

SCC = 30499999--OTHER/NOT CLSPECIFY IN REMARK -NO CONTROL EQUIPMENT -TOT RECS = 254

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 20 | .833E 11 | .684E 11 | .0 | .243E 11 | .231E 11 | .0 |
| 28 | .916E 11 | .859E 11 | .0 | .0 | .0 | .0 |
| 32 | .687E 11 | .644E 11 | .0 | .0 | .0 | .0 |
| 33 | .250E 13 | .219E 13 | .825E 12 | .168E 12 | .160E 12 | .396E 11 |
| 34 | .637E 12 | .523E 12 | .164E 12 | .117E 11 | .111E 11 | .358E 10 |
| 35 | .949E 11 | .797E 11 | .171E 11 | .0 | .0 | .0 |
| 36 | .928E 11 | .860E 11 | .650E 11 | .328E 08 | .311E 08 | .285E 08 |
| 37 | .116E 12 | .987E 11 | .680E 10 | .225E 10 | .214E 10 | .0 |
| 39 | .103E 12 | .863E 11 | .140E 11 | .0 | .0 | .0 |
| 49 | .933E 10 | .875E 10 | .0 | .0 | .0 | .0 |
| 91 | .458E 11 | .429E 11 | .0 | .0 | .0 | .0 |
| 99 | .766E 12 | .677E 12 | .356E 12 | .767E 11 | .730E 11 | .413E 11 |
| | .461E 13 | .401E 13 | .145E 13 | .283E 12 | .270E 12 | .845E 11 |

CC = 30499999--OTHER/NOT CL SPECIFY IN REMARK -- -NO CONTROL EQUIPMENT -SIC= J -TOTAL RECS = 254

```
TEMP RANGE   COUNT
                       ------------------------------------------------------------------------------------------
   0.- 100.  .165E 13  !HHHHHHHHHHHHHHHH
 101.- 200.  .105E 13  !HHHHHHHHHH
 201.- 300.  .380E 12  !HHH
 301.- 400.  .189E 12  !H
 401.- 500.  .104E 12  !H
 501.- 600.  .548E 11  !H
 601.- 700.  .134E 12  !H
 701.- 800.  .214E 12  !HH
 801.- 900.  .904E 10  !H
 901.-1000.  .133E 12  !H
1001.-1100.  .909E 11  !H
1101.-1200.  .799E 08  !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
```

SCC= 30499999--OTHER/NOT CL SPECIFY IN REMARK -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 238

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .186E 13 | .175E 13 | .813E 12 | .0 | .0 | .0 |
| 101.- 200. | .117E 13 | .968E 12 | .457E 12 | .0 | .0 | .0 |
| 201.- 300. | .145E 12 | .109E 12 | .299E 11 | .0 | .0 | .0 |
| 301.- 400. | .154E 12 | .119E 12 | .212E 10 | .510E 10 | .484E 10 | .155E 09 |
| 401.- 500. | .162E 12 | .127E 12 | .751E 11 | .159E 11 | .151E 11 | .138E 11 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .266E 12 | .216E 12 | .142E 12 | .684E 11 | .649E 11 | .594E 11 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .127E 12 | .107E 12 | .762E 11 | .512E 11 | .488E 11 | .445E 11 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .388E 13 | .339E 13 | .160E 13 | .141E 12 | .134E 12 | .118E 12 |

SCC = 30499999--OTHER/NOT CLSPECIFY IN REMARK -WITH CONTROL EQUIPMENT -TOT RECS = 238

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 28 | .165E 12 | .138E 12 | .920E 10 | .0 | .0 | .0 |
| 32 | .730E 10 | .544E 10 | .268E 10 | .0 | .0 | .0 |
| 33 | .217E 13 | .188E 13 | .781E 12 | .128E 11 | .121E 11 | .870E 10 |
| 34 | .177E 12 | .166E 12 | .533E 11 | .0 | .0 | .0 |
| 35 | .120E 12 | .111E 12 | .862E 11 | .0 | .0 | .0 |
| 36 | .415E 12 | .344E 12 | .222E 12 | .767E 11 | .729E 11 | .666E 11 |
| 37 | .203E 12 | .179E 12 | .869E 11 | .489E 11 | .465E 11 | .425E 11 |
| 38 | .947E 08 | .888E 08 | .723E 08 | .0 | .0 | .0 |
| 39 | .132E 11 | .124E 11 | .0 | .0 | .0 | .0 |
| 49 | .663E 11 | .622E 11 | .507E 11 | .0 | .0 | .0 |
| 50 | .247E 12 | .228E 12 | .168E 12 | .0 | .0 | .0 |
| 91 | .743E 08 | .697E 08 | .568E 08 | .0 | .0 | .0 |
| 93 | .412E 10 | .387E 10 | .315E 10 | .0 | .0 | .0 |
| 99 | .293E 12 | .261E 12 | .132E 12 | .217E 10 | .206E 10 | .0 |
| | .388E 13 | .339E 13 | .160E 13 | .141E 12 | .134E 12 | .118E 12 |

CC =30499999--OTHER/NOT CL SPECIFY IN REMARK ---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 238

```
TEMP RANGE   COUNT
                     ----------------------------------------------------------------------------------------------------
   0.- 100.  .175E 13 !HHHHHHHHHHHHHHHHHH
 101.- 200.  .968E 12 !HHHHHHHHHH
 201.- 300.  .109E 12 !H
 301.- 400.  .119E 12 !H
 401.- 500.  .127E 12 !H
 501.- 600.  .0       !
 601.- 700.  .216E 12 !HH
 701.- 800.  .0       !
 801.- 900.  .0       !
 901.-1000.  .107E 12 !H
1001.-1100.  .0       !
1101.-1200.  .0       !
1201.-1300.  .0       !
1301.-1400.  .0       !
1401.-1500.  .0       !
1501.-1600.  .0       !
1601.-1700.  .0       !
1701.-1800.  .0       !
1801.-1900.  .0       !
1901.-2000.  .0       !
2001.-2100.  .0       !
2801.-2900.  .0       !
2901.-3000.  .0       !
                      0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30499999--OTHER/NOT CL SPECIFY IN REMARK -TOTAL SCC -SIC = 0 -TOT RECS = 492

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .362E 13 | .339E 13 | .143E 13 | .0 | .0 | .0 |
| 101.- 200. | .238E 13 | .202E 13 | .877E 12 | .0 | .0 | .0 |
| 201.- 300. | .644E 12 | .489E 12 | .190E 12 | .0 | .0 | .0 |
| 301.- 400. | .398E 12 | .308E 12 | .823E 11 | .146E 11 | .138E 11 | .643E 10 |
| 401.- 500. | .294E 12 | .231E 12 | .106E 12 | .315E 11 | .300E 11 | .208E 11 |
| 501.- 600. | .682E 11 | .548E 11 | .348E 11 | .138E 11 | .131E 11 | .120E 11 |
| 601.- 700. | .430E 12 | .351E 12 | .142E 12 | .115E 12 | .109E 12 | .594E 11 |
| 701.- 800. | .260E 12 | .214E 12 | .0 | .827E 11 | .787E 11 | .0 |
| 801.- 900. | .108E 11 | .904E 10 | .639E 10 | .412E 10 | .393E 10 | .358E 10 |
| 901.-1000. | .284E 12 | .239E 12 | .171E 12 | .115E 12 | .110E 12 | .100E 12 |
| 1001.-1100. | .107E 12 | .909E 11 | .0 | .473E 11 | .450E 11 | .0 |
| 1101.-1200. | .936E 08 | .799E 08 | .590E 08 | .441E 08 | .420E 08 | .382E 08 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .849E 13 | .740E 13 | .304E 13 | .424E 12 | .403E 12 | .202E 12 |

SCC = 30499999--OTHER/NOT CLSPECIFY IN REMARK -TOTAL SCC -TOT RECS = 492

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 20 | .833E 11 | .684E 11 | .0 | .243E 11 | .231E 11 | .0 |
| 28 | .257E 12 | .224E 12 | .920E 10 | .0 | .0 | .0 |
| 32 | .760E 11 | .698E 11 | .268E 10 | .0 | .0 | .0 |
| 33 | .467E 13 | .407E 13 | .161E 13 | .181E 12 | .172E 12 | .483E 11 |
| 34 | .814E 12 | .689E 12 | .218E 12 | .117E 11 | .111E 11 | .358E 10 |
| 35 | .215E 12 | .190E 12 | .103E 12 | .0 | .0 | .0 |
| 36 | .508E 12 | .430E 12 | .287E 12 | .767E 11 | .729E 11 | .667E 11 |
| 37 | .319E 12 | .278E 12 | .937E 11 | .511E 11 | .487E 11 | .425E 11 |
| 38 | .947E 08 | .888E 08 | .723E 08 | .0 | .0 | .0 |
| 39 | .116E 12 | .987E 11 | .140E 11 | .0 | .0 | .0 |
| 49 | .757E 11 | .710E 11 | .507E 11 | .0 | .0 | .0 |
| 50 | .247E 12 | .228E 12 | .168E 12 | .0 | .0 | .0 |
| 91 | .459E 11 | .430E 11 | .568E 08 | .0 | .0 | .0 |
| 93 | .412E 10 | .387E 10 | .315E 10 | .0 | .0 | .0 |
| 99 | .106E 13 | .938E 12 | .488E 12 | .789E 11 | .751E 11 | .413E 11 |
| | .849E 13 | .740E 13 | .304E 13 | .424E 12 | .403E 12 | .202E 12 |

CC 30499999--OTHER/NOT CL SPECIFY IN REMARK --TOTAL SCC -SIC = 0 -TOT RECS = 492

```
EMP RANGE    COUNT

                         ----------------------------------------------------------------------------------------------------
   0.- 100.  .339E 13   !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 101.- 200.  .202E 13   !HHHHHHHHHHHHHHHHHHHH
 201.- 300.  .489E 12   !HHHH
 301.- 400.  .308E 12   !HHH
 401.- 500.  .231E 12   !HH
 501.- 600.  .548E 11   !H
 601.- 700.  .351E 12   !HHH
 701.- 800.  .214E 12   !HH
 801.- 900.  .904E 10   !H
 901.-1000.  .239E 12   !HH
1001.-1100.  .909E 11   !H
1101.-1200.  .799E 08   !
1201.-1300.  .0         !
1301.-1400.  .0         !
1401.-1500.  .0         !
1501.-1600.  .0         !
1601.-1700.  .0         !
1701.-1800.  .0         !
1801.-1900.  .0         !
1901.-2000.  .0         !
2001.-2100.  .0         !
2101.-2200.  .0         !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500101--ASPHALT ROOF BLOWING OPERATION -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 15

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .292E 11 | .274E 11 | .0 | .0 | .0 | .0 |
| 101.- 200. | .123E 12 | .921E 11 | .457E 11 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .922E 11 | .719E 11 | .0 | .0 | .0 | .0 |
| 401.- 500. | .772E 12 | .608E 12 | .0 | .685E 10 | .650E 10 | .0 |
| 501.- 600. | .109E 12 | .880E 11 | .0 | .870E 11 | .826E 11 | .0 |
| 601.- 700. | .0 | .0 | .0 | .253E 11 | .240E 11 | .0 |
| 701.- 800. | .448E 11 | .371E 11 | .255E 11 | .0 | .0 | .0 |
| 801.- 900. | .135E 12 | .113E 12 | .0 | .148E 11 | .141E 11 | .129E 11 |
| 901.-1000. | .0 | .0 | .0 | .515E 11 | .491E 11 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .130E 13 | .104E 13 | .712E 11 | .186E 12 | .176E 12 | .129E 11 |

SCC = 30500101--ASPHALT ROOFBLOWING OPERATION -NO CONTROL EQUIPMENT -TOT RECS = 15

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 29 | .881E 12 | .696E 12 | .712E 11 | .101E 12 | .963E 11 | .129E 11 |
| 33 | .135E 12 | .113E 12 | .0 | .515E 11 | .491E 11 | .0 |
| 99 | .289E 12 | .228E 12 | .0 | .326E 11 | .310E 11 | .0 |
| | .130E 13 | .104E 13 | .712E 11 | .186E 12 | .176E 12 | .129E 11 |

CC = 30500101--ASPHALT ROOF BLOWING OPERATION -- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 15

```
TEMP RANGE   COUNT
                     ----------------------------------------------------------------------------------------------------
   0.- 100.  .274E 11  !H
 101.- 200.  .921E 11  !H
 201.- 300.  .0        !
 301.- 400.  .719E 11  !H
 401.- 500.  .608E 12  !HHHHHH
 501.- 600.  .880E 11  !H
 601.- 700.  .0        !
 701.- 800.  .371E 11  !H
 801.- 900.  .113E 12  !H
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                     0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500101--ASPHALT ROOF BLOWING OPERATION -WITH CONTROL EQUIPMENT -SIC = ) -TOT RECS = 32

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .195E 11 | .183E 11 | .833E 09 | .0 | .0 | .0 |
| 101.- 200. | .388E 11 | .313E 11 | .154E 11 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .344E 12 | .267E 12 | .182E 11 | .158E 11 | .150E 11 | .124E 10 |
| 401.- 500. | .455E 11 | .361E 11 | .221E 11 | .670E 10 | .636E 10 | .582E 10 |
| 501.- 600. | .104E 12 | .846E 11 | .372E 11 | .243E 11 | .231E 11 | .143E 11 |
| 601.- 700. | .110E 12 | .896E 11 | .596E 11 | .301E 11 | .286E 11 | .261E 11 |
| 701.- 800. | .270E 10 | .222E 10 | .149E 10 | .788E 09 | .750E 09 | .685E 09 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .228E 11 | .195E 11 | .144E 11 | .108E 11 | .102E 11 | .931E 10 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .688E 12 | .549E 12 | .169E 12 | .884E 11 | .840E 11 | .575E 11 |

SCC = 30500101--ASPHALT ROOFBLOWING OPERATION -WITH CONTROL EQUIPMENT -TOT RECS = 32

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 26 | .270E 10 | .222E 10 | .149E 10 | .788E 09 | .750E 09 | .685E 09 |
| 28 | .347E 11 | .281E 11 | .182E 11 | .810E 10 | .769E 10 | .704E 10 |
| 29 | .607E 12 | .483E 12 | .129E 12 | .710E 11 | .675E 11 | .424E 11 |
| 32 | .413E 11 | .341E 11 | .198E 11 | .841E 10 | .799E 10 | .731E 10 |
| 99 | .179E 10 | .139E 10 | .784E 09 | .659E 08 | .626E 08 | .573E 08 |
| | .688E 12 | .549E 12 | .169E 12 | .884E 11 | .840E 11 | .575E 11 |

CC =30500101--ASPHALT ROOF BLOWING OPERATION ---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 32

```
TEMP RANGE    COUNT
                      ------------------------------------------------------------------------------------------
    0.- 100.  .183E 11 !H
  101.- 200.  .313E 11 !H
  201.- 300.  .0       !
  301.- 400.  .267E 12 !HH
  401.- 500.  .361E 11 !H
  501.- 600.  .846E 11 !H
  601.- 700.  .896E 11 !H
  701.- 800.  .222E 10 !H
  801.- 900.  .0       !
  901.-1000.  .0       !
 1001.-1100.  .0       !
 1101.-1200.  .195E 11 !H
 1201.-1300.  .0       !
 1301.-1400.  .0       !
 1401.-1500.  .0       !
 1501.-1600.  .0       !
 1601.-1700.  .0       !
 1701.-1800.  .0       !
 1801.-1900.  .0       !
 1901.-2000.  .0       !
 2001.-2100.  .0       !
 2101.-2200.  .0       !
 2201.-2300.  .0       !
 2301.-2400.  .0       !
 2401.-2500.  .0       !
 2501.-2600.  .0       !
 2601.-2700.  .0       !
 2701.-2800.  .0       !
 2801.-2900.  .0       !
 2901.-3000.  .0       !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500101--ASPHALT ROOF BLOWING OPERATION -TOTAL SCC -SIC = 0 -TOT RECS = 47

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .487E 11 | .457E 11 | .833E 09 | .0 | .0 | .0 |
| 101.- 200. | .162E 12 | .123E 12 | .611E 11 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .437E 12 | .339E 12 | .182E 11 | .226E 11 | .215E 11 | .124E 10 |
| 401.- 500. | .817E 12 | .644E 12 | .221E 11 | .937E 11 | .889E 11 | .582E 10 |
| 501.- 600. | .213E 12 | .173E 12 | .372E 11 | .497E 11 | .472E 11 | .143E 11 |
| 601.- 700. | .110E 12 | .896E 11 | .596E 11 | .301E 11 | .286E 11 | .261E 11 |
| 701.- 800. | .475E 11 | .393E 11 | .270E 11 | .156E 11 | .149E 11 | .136E 11 |
| 801.- 900. | .135E 12 | .113E 12 | .0 | .515E 11 | .491E 11 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .228E 11 | .195E 11 | .144E 11 | .108E 11 | .102E 11 | .931E 10 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .199E 13 | .159E 13 | .240E 12 | .274E 12 | .260E 12 | .704E 11 |

SCC = 30500101--ASPHALT ROOFBLOWING OPERATION -TOTAL SCC -TOT RECS = 47

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 26 | .270E 10 | .222E 10 | .149E 10 | .788E 09 | .750E 09 | .685E 09 |
| 28 | .347E 11 | .281E 11 | .182E 11 | .810E 10 | .769E 10 | .704E 10 |
| 29 | .149E 13 | .118E 13 | .200E 12 | .172E 12 | .164E 12 | .553E 11 |
| 32 | .413E 11 | .341E 11 | .198E 11 | .841E 10 | .799E 10 | .731E 10 |
| 33 | .135E 12 | .113E 12 | .0 | .515E 11 | .491E 11 | .0 |
| 99 | .291E 12 | 229E 12 | .784E 09 | .327E 11 | .310E 11 | .573E 08 |
| | .199E 13 | .159E 13 | .240E 12 | .274E 12 | .260E 12 | .704E 11 |

CC 30500101--ASPHALT ROOF BLOWING OPERATION --TOTAL SCC -SIC = 0 -TOT RECS = 47

```
EMP RANGE     COUNT
                     -------------------------------------------------------------------------------------------------
    0.- 100.  .457E 11  !H
  101.- 200.  .123E 12  !H
  201.- 300.  .0        !
  301.- 400.  .339E 12  !HHH
  401.- 500.  .644E 12  !HHHHHH
  501.- 600.  .173E 12  !H
  601.- 700.  .896E 11  !H
  701.- 800.  .393E 11  !H
  801.- 900.  .113E 12  !H
  901.-1000.  .0        !
 1001.-1100.  .0        !
 1101.-1200.  .195E 11  !H
 1201.-1300.  .0        !
 1301.-1400.  .0        !
 1401.-1500.  .0        !
 1501.-1600.  .0        !
 1601.-1700.  .0        !
 1701.-1800.  .0        !
 1801.-1900.  .0        !
 1901.-2000.  .0        !
 2001.-2100.  .0        !
 2101.-2200.  .0        !
 2201.-2300.  .0        !
 2301.-2400.  .0        !
 2401.-2500.  .0        !
 2501.-2600.  .0        !
 2601.-2700.  .0        !
 2701.-2800.  .0        !
 2801.-2900.  .0        !
 2901.-3000.  .0        !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500102--ASPHALT ROOF DIPPING ONLY -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 9

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .132E 11 | .124E 11 | .354E 10 | .0 | .0 | .0 |
| 101.- 200. | .329E 12 | .255E 12 | .768E 11 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .342E 12 | .267E 12 | .804E 11 | .0 | .0 | .0 |

SCC = 30500102--ASPHALT ROOFDIPPING ONLY -NO CONTROL EQUIPMENT -TOT RECS = 9

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 26 | .890E 11 | .714E 11 | .174E 11 | .0 | .0 | .0 |
| 29 | .253E 12 | .196E 12 | .630E 11 | .0 | .0 | .0 |
| | .342E 12 | .267E 12 | .804E 11 | .0 | .0 | .0 |

CC = 30500102--ASPHALT ROOF DIPPING ONLY -- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 9

```
TEMP RANGE   COUNT
                   ---------------------------------------------------------------------------------------
   0.- 100.  .124E 11  !H
 101.- 200.  .255E 12  !HH
 201.- 300.  .0        !
 301.- 400.  .0        !
 401.- 500.  .0        !
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500102--ASPHALT ROOF DIPPING ONLY -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 36

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .153E 12 | .144E 12 | .782E 11 | .0 | .0 | .0 |
| 101.- 200. | .832E 12 | .757E 12 | .391E 12 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .521E 12 | .403E 12 | .179E 11 | .190E 11 | .181E 11 | .122E 10 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .379E 11 | .304E 11 | .192E 11 | .727E 10 | .690E 10 | .632E 10 |
| 601.- 700. | .167E 12 | .136E 12 | .896E 11 | .430E 11 | .409E 11 | .374E 11 |
| 701.- 800. | .208E 12 | .173E 12 | .119E 12 | .690E 11 | .657E 11 | .600E 11 |
| 801.- 900. | .248E 11 | .206E 11 | .144E 11 | .883E 10 | .840E 10 | .767E 10 |
| 901.-1000. | .150E 12 | .127E 12 | .909E 11 | .619E 11 | .589E 11 | .537E 11 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .209E 13 | .179E 13 | .820E 12 | .209E 12 | .199E 12 | .166E 12 |

SCC = 30500102--ASPHALT ROOFDIPPING ONLY -WITH CONTROL EQUIPMENT -TOT RECS = 36

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 26 | .417E 10 | .314E 10 | .154E 10 | .0 | .0 | .0 |
| 29 | .173E 13 | .145E 13 | .613E 12 | .209E 12 | .199E 12 | .166E 12 |
| 32 | .356E 12 | .334E 12 | .205E 12 | .0 | .0 | .0 |
| | .209E 13 | .179E 13 | .820E 12 | .209E 12 | .199E 12 | .166E 12 |

CC =30500102--ASPHALT ROOF DIPPING ONLY ---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 36

```
TEMP RANGE   COUNT

                       ----------------------------------------------------------------------------------------------------
  0.- 100.   .144E 12  !H
101.- 200.   .757E 12  !HHHHHHH
201.- 300.   .0        !
301.- 400.   .403E 12  !HHHH
401.- 500.   .0        !
501.- 600.   .304E 11  !H
601.- 700.   .136E 12  !H
701.- 800.   .173E 12  !H
801.- 900.   .206E 11  !H
901.-1000.   .127E 12  !H
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500102--ASPHALT ROOF DIPPING ONLY -TOTAL SCC -SIC = 0 -TOT RECS = 45

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .167E 12 | .156E 12 | .817E 11 | .0 | .0 | .0 |
| 101.- 200. | .116E 13 | .101E 13 | .468E 12 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .521E 12 | .403E 12 | .179E 11 | .190E 11 | .181E 11 | .122E 10 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .379E 11 | .304E 11 | .192E 11 | .727E 10 | .690E 10 | .632E 10 |
| 601.- 700. | .167E 12 | .136E 12 | .896E 11 | .430E 11 | .409E 11 | .374E 11 |
| 701.- 800. | .208E 12 | .173E 12 | .119E 12 | .690E 11 | .657E 11 | .600E 11 |
| 801.- 900. | .248E 11 | .206E 11 | .144E 11 | .883E 10 | .840E 10 | .767E 10 |
| 901.-1000. | .150E 12 | .127E 12 | .909E 11 | .619E 11 | .589E 11 | .537E 11 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .244E 13 | .206E 13 | .901E 12 | .209E 12 | .199E 12 | .166E 12 |

SCC = 30500102--ASPHALT ROOFDIPPING ONLY -TOTAL SCC -TOT RECS = 45

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 26 | .932E 11 | .745E 11 | .189E 11 | .0 | .0 | .0 |
| 29 | .199E 13 | .165E 13 | .676E 12 | .209E 12 | .199E 12 | .166E 12 |
| 32 | .356E 12 | .334E 12 | .205E 12 | .0 | .0 | .0 |
| | .244E 13 | .206E 13 | .901E 12 | .209E 12 | .199E 12 | .166E 12 |

CC 30500102--ASPHALT ROOF DIPPING ONLY --TOTAL SCC -SIC = 0 -TOT RECS = 45

```
EMP RANGE   COUNT
                     ------------------------------------------------------------------------------------------------------
   0.- 100.  .156E 12  !H
 101.- 200.  .101E 13  !HHHHHHHHHH
 201.- 300.  .0        !
 301.- 400.  .403E 12  !HHHH
 401.- 500.  .0        !
 501.- 600.  .304E 11  !H
 601.- 700.  .136E 12  !H
 701.- 800.  .173E 12  !H
 801.- 900.  .206E 11  !H
 901.-1000.  .127E 12  !H
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500103--ASPHALT ROOF SPRAYING ONLY -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 3

| | | | | | | |
|---|---|---|---|---|---|---|
| TEMP | MAXIMUM | EXPECTED | MINIMUM | MAXIMUM | EXPECTED | MINIMUM |
| | 60 DEG | 60 DEG | 60 DEG | 300 DEG | 300 DEG | 300 DEG |

0 RECORDS FOR THIS SECTION OF SCC

SCC = 30500103--ASPHALT ROOFSPRAYING ONLY -NO CONTROL EQUIPMENT -TOT RECS = 3

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
| --- | --- | --- | --- | --- | --- | --- |

SCC= 30500103--ASPHALT ROOF SPRAYING ONLY -WITH CONTROL EQUIPMENT -SIC = ) -TOT RECS = 3

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .102E 11 | .786E 10 | .441E 10 | .269E 09 | .255E 09 | .233E 09 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .202E 11 | .164E 11 | .0 | .472E 10 | .448E 10 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .344E 11 | .288E 11 | .203E 11 | .131E 11 | .125E 11 | .114E 11 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .648E 11 | .530E 11 | .248E 11 | .181E 11 | .172E 11 | .116E 11 |

SCC = 30500103--ASPHALT ROOFSPRAYING ONLY -WITH CONTROL EQUIPMENT -TOT RECS = 3

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 29 | .648E 11 | .530E 11 | .248E 11 | .181E 11 | .172E 11 | .116E 11 |
| | .648E 11 | .530E 11 | .248E 11 | .181E 11 | .172E 11 | .116E 11 |

CC =30500103--ASPHALT ROOF SPRAYING ONLY ---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 3

```
TEMP RANGE   COUNT
                       ------------------------------------------------------------------------------------------
   0.- 100.  .0        !
 101.- 200.  .0        !
 201.- 300.  .0        !
 301.- 400.  .786E 10  !H
 401.- 500.  .0        !
 501.- 600.  .164E 11  !H
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .288E 11  !H
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500104--ASPHALT ROOF DIPPING AND SPRAYING -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 6

| | | | | | | |
|---|---|---|---|---|---|---|
| TEMP | MAXIMUM<br>60 DEG | EXPECTED<br>60 DEG | MINIMUM<br>60 DEG | MAXIMUM<br>300 DEG | EXPECTED<br>300 DEG | MINIMUM<br>300 DEG |

0 RECORDS FOR THIS SECTION OF SCC

SCC = 30500104--ASPHALT ROOFDIPPING AND SPRAYING -NO CONTROL EQUIPMENT -TOT RECS = 6

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|

SCC= 30500104--ASPHALT ROOF DIPPING AND SPRAYING -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 20

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .561E 11 | .526E 11 | .429E 11 | .0 | .0 | .0 |
| 101.- 200. | .232E 12 | .203E 12 | .881E 11 | .0 | .0 | .0 |
| 201.- 300. | .353E 12 | .270E 12 | .349E 11 | .0 | .0 | .0 |
| 301.- 400. | .159E 12 | .124E 12 | .441E 10 | .114E 11 | .108E 11 | .233E 09 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .590E 11 | .494E 11 | .349E 11 | .225E 11 | .215E 11 | .196E 11 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .859E 12 | .699E 12 | .205E 12 | .339E 11 | .323E 11 | .198E 11 |

SCC = 30500104--ASPHALT ROOFDIPPING AND SPRAYING -WITH CONTROL EQUIPMENT -TOT RECS = 20

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 29 | .637E 12 | .514E 12 | .938E 11 | .196E 11 | .186E 11 | .739E 10 |
| 32 | .101E 12 | .902E 11 | .544E 11 | .0 | .0 | .0 |
| 99 | .120E 12 | .950E 11 | .571E 11 | .143E 11 | .136E 11 | .124E 11 |
| | .859E 12 | .699E 12 | .205E 12 | .339E 11 | .323E 11 | .198E 11 |

CC =30500104--ASPHALT ROOF DIPPING AND SPRAYING---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 20

| TEMP RANGE | COUNT | |
|---|---|---|
| 0.- 100. | .526E 11 | !H |
| 101.- 200. | .203E 12 | !HH |
| 201.- 300. | .270E 12 | !HH |
| 301.- 400. | .124E 12 | !H |
| 401.- 500. | .0 | ! |
| 501.- 600. | .0 | ! |
| 601.- 700. | .0 | ! |
| 701.- 800. | .0 | ! |
| 801.- 900. | .494E 11 | !H |
| 901.-1000. | .0 | ! |
| 1001.-1100. | .0 | ! |
| 1101.-1200. | .0 | ! |
| 1201.-1300. | .0 | ! |
| 1301.-1400. | .0 | ! |
| 1401.-1500. | .0 | ! |
| 1501.-1600. | .0 | ! |
| 1601.-1700. | .0 | ! |
| 1701.-1800. | .0 | ! |
| 1801.-1900. | .0 | ! |
| 1901.-2000. | .0 | ! |
| 2001.-2100. | .0 | ! |
| 2101.-2200. | .0 | ! |
| 2201.-2300. | .0 | ! |
| 2301.-2400. | .0 | ! |
| 2401.-2500. | .0 | ! |
| 2501.-2600. | .0 | ! |
| 2601.-2700. | .0 | ! |
| 2701.-2800. | .0 | ! |
| 2801.-2900. | .0 | ! |
| 2901.-3000. | .0 | ! |

0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100

SCC= 30500199--ASPHALT ROOF OTHER/NOT CLASSIFIED -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 23

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .641E 11 | .602E 11 | .316E 11 | .0 | .0 | .0 |
| 101.- 200. | .394E 12 | .326E 12 | .114E 12 | .0 | .0 | .0 |
| 201.- 300. | .547E 11 | .414E 11 | .0 | .0 | .0 | .0 |
| 301.- 400. | .639E 11 | .499E 11 | .0 | .475E 10 | .451E 10 | .0 |
| 401.- 500. | .709E 09 | .558E 09 | .334E 09 | .798E 08 | .758E 08 | .694E 08 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .816E 11 | .666E 11 | .827E 09 | .220E 11 | .209E 11 | .370E 09 |
| 701.- 800. | .879E 11 | .728E 11 | .500E 11 | .291E 11 | .277E 11 | .253E 11 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .747E 12 | .618E 12 | .197E 12 | .560E 11 | .532E 11 | .258E 11 |

SCC = 30500199--ASPHALT ROOFOTHER/NOT CLASSIFIED -NO CONTROL EQUIPMENT -TOT RECS = 23

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 14 | .493E 11 | .371E 11 | .0 | .0 | .0 | .0 |
| 26 | .117E 12 | .102E 12 | .501E 11 | .0 | .0 | .0 |
| 28 | .256E 10 | .205E 10 | .129E 10 | .506E 09 | .481E 09 | .440E 09 |
| 29 | .445E 12 | .368E 12 | .949E 11 | .363E 11 | .345E 11 | .860E 10 |
| 33 | .746E 11 | .608E 11 | .174E 11 | .0 | .0 | .0 |
| 46 | .580E 11 | .481E 11 | .330E 11 | .192E 11 | .183E 11 | .167E 11 |
| 99 | .489E 08 | .459E 08 | .374E 08 | .0 | .0 | .0 |
| | .747E 12 | .618E 12 | .197E 12 | .560E 11 | .532E 11 | .258E 11 |

CC = 30500199--ASPHALT ROOF OTHER/NOT CLASSIFIED-- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 23

```
TEMP RANGE   COUNT
                       ----------------------------------------------------------------------------------------------------
   0.- 100.  .602E 11  !H
 101.- 200.  .326E 12  !HHH
 201.- 300.  .414E 11  !H
 301.- 400.  .499E 11  !H
 401.- 500.  .558E 09  !
 501.- 600.  .0        !
 601.- 700.  .666E 11  !H
 701.- 800.  .728E 11  !H
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500199--ASPHALT ROOF OTHER/NOT CLASSIFIED -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 42

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .119E 12 | .111E 12 | .539E 11 | .0 | .0 | .0 |
| 101.- 200. | .250E 12 | .191E 12 | .829E 11 | .0 | .0 | .0 |
| 201.- 300. | .102E 11 | .784E 10 | .430E 10 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .246E 11 | .193E 11 | .114E 11 | .230E 10 | .218E 10 | .200E 10 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .138E 12 | .114E 12 | .784E 11 | .456E 11 | .434E 11 | .397E 11 |
| 801.- 900. | .265E 11 | .219E 11 | .151E 11 | .890E 10 | .847E 10 | .774E 10 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .173E 12 | .149E 12 | .113E 12 | .917E 11 | .872E 11 | .792E 11 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .740E 12 | .614E 12 | .359E 12 | .149E 12 | .141E 12 | .129E 12 |

SCC = 30500199--ASPHALT ROOFOTHER/NOT CLASSIFIED -WITH CONTROL EQUIPMENT -TOT RECS = 42

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 29 | .710E 12 | .589E 12 | .348E 12 | .149E 12 | .141E 12 | .129E 12 |
| 32 | .238E 11 | .186E 11 | .106E 11 | .0 | .0 | .0 |
| 99 | .687E 10 | .645E 10 | .598E 09 | .0 | .0 | .0 |
| | .740E 12 | .614E 12 | .359E 12 | .149E 12 | .141E 12 | .129E 12 |

CC =30500199--ASPHALT ROOF OTHER/NOT CLASSIFIED---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 42

| TEMP RANGE | COUNT | |
|---|---|---|
| 0.- 100. | .111E 12 | !H |
| 101.- 200. | .191E 12 | !H |
| 201.- 300. | .784E 10 | !H |
| 301.- 400. | .0 | ! |
| 401.- 500. | .193E 11 | !H |
| 501.- 600. | .0 | ! |
| 601.- 700. | .0 | ! |
| 701.- 800. | .114E 12 | !H |
| 801.- 900. | .219E 11 | !H |
| 901.-1000. | .0 | ! |
| 1001.-1100. | .0 | ! |
| 1101.-1200. | .0 | ! |
| 1201.-1300. | .0 | ! |
| 1301.-1400. | .149E 12 | !H |
| 1401.-1500. | .0 | ! |
| 1501.-1600. | .0 | ! |
| 1601.-1700. | .0 | ! |
| 1701.-1800. | .0 | ! |
| 1801.-1900. | .0 | ! |
| 1901.-2000. | .0 | ! |
| 2001.-2100. | .0 | ! |
| 2101.-2200. | .0 | ! |
| 2201.-2300. | .0 | ! |
| 2301.-2400. | .0 | ! |
| 2401.-2500. | .0 | ! |
| 2501.-2600. | .0 | ! |
| 2601.-2700. | .0 | ! |
| 2701.-2800. | .0 | ! |
| 2801.-2900. | .0 | ! |
| 2901.-3000. | .0 | ! |

```
0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500199--ASPHALT ROOF OTHER/NOT CLASSIFIED -TOTAL SCC -SIC = 0 -TOT RECS = 65

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .183E 12 | .171E 12 | .855E 11 | .0 | .0 | .0 |
| 101.- 200. | .644E 12 | .517E 12 | .197E 12 | .0 | .0 | .0 |
| 201.- 300. | .650E 11 | .493E 11 | .430E 10 | .0 | .0 | .0 |
| 301.- 400. | .639E 11 | .499E 11 | .0 | .475E 10 | .451E 10 | .0 |
| 401.- 500. | .253E 11 | .199E 11 | .117E 11 | .238E 10 | .226E 10 | .207E 10 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .816E 11 | .666E 11 | .827E 09 | .220E 11 | .209E 11 | .370E 09 |
| 701.- 800. | .226E 12 | .187E 12 | .128E 12 | .748E 11 | .711E 11 | .650E 11 |
| 801.- 900. | .265E 11 | .219E 11 | .151E 11 | .890E 10 | .847E 10 | .774E 10 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .173E 12 | .149E 12 | .113E 12 | .917E 11 | .872E 11 | .792E 11 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .149E 13 | .123E 13 | .556E 12 | .205E 12 | .195E 12 | .154E 12 |

SCC = 30500199--ASPHALT ROOFOTHER/NOT CLASSIFIED -TOTAL SCC -TOT RECS = 65

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 14 | .493E 11 | .371E 11 | .0 | .0 | .0 | .0 |
| 26 | .117E 12 | .102E 12 | .501E 11 | .0 | .0 | .0 |
| 28 | .256E 10 | .205E 10 | .129E 10 | .506E 09 | .481E 09 | .440E 09 |
| 29 | .115E 13 | .957E 12 | .443E 12 | .185E 12 | .176E 12 | .137E 12 |
| 32 | .238E 11 | .186E 11 | .106E 11 | .0 | .0 | .0 |
| 33 | .746E 11 | .608E 11 | .174E 11 | .0 | .0 | .0 |
| 46 | .580E 11 | .481E 11 | .330E 11 | .192E 11 | .183E 11 | .167E 11 |
| 99 | .692E 10 | .649E 10 | .636E 09 | .0 | .0 | .0 |
| | .149E 13 | .123E 13 | .556E 12 | .205E 12 | .195E 12 | .154E 12 |

CC 30500199--ASPHALT ROOF OTHER/NOT CLASSIFIED--TOTAL SCC -SIC = 0 -TOT RECS = 65

```
EMP RANGE    COUNT
                  ----------------------------------------------------------------------------------------------------
   0.- 100.  .171E 12  !H
 101.- 200.  .517E 12  !HHHHH
 201.- 300.  .493E 11  !H
 301.- 400.  .499E 11  !H
 401.- 500.  .199E 11  !H
 501.- 600.  .0        !
 601.- 700.  .666E 11  !H
 701.- 800.  .187E 12  !H
 801.- 900.  .219E 11  !H
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .149E 12  !H
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500201--ASPHALTIC CO ROTARY DRIER -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 187

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .456E 12 | .428E 12 | .666E 10 | .0 | .0 | .0 |
| 101.- 200. | .571E 12 | .445E 12 | .126E 12 | .0 | .0 | .0 |
| 201.- 300. | .171E 12 | .130E 12 | .491E 11 | .0 | .0 | .0 |
| 301.- 400. | .817E 11 | .634E 11 | .189E 11 | .401E 10 | .381E 10 | .191E 10 |
| 401.- 500. | .233E 11 | .185E 11 | .114E 11 | .350E 10 | .332E 10 | .304E 10 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .130E 13 | .109E 13 | .212E 12 | .751E 10 | .713E 10 | .495E 10 |

SCC = 30500201--ASPHALTIC COROTARY DRIER -NO CONTROL EQUIPMENT -TOT RECS = 187

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 14 | .105E 11 | .989E 10 | .0 | .0 | .0 | .0 |
| 16 | .750E 10 | .621E 10 | .178E 10 | .0 | .0 | .0 |
| 22 | .823E 10 | .636E 10 | .360E 10 | .302E 09 | .287E 09 | .263E 09 |
| 24 | .723E 10 | .678E 10 | .0 | .0 | .0 | .0 |
| 29 | .117E 13 | .964E 12 | .199E 12 | .594E 10 | .564E 10 | .359E 10 |
| 32 | .322E 11 | .275E 11 | .775E 10 | .127E 10 | .120E 10 | .110E 10 |
| 42 | .348E 10 | .327E 10 | .0 | .0 | .0 | .0 |
| 51 | .348E 10 | .327E 10 | .0 | .0 | .0 | .0 |
| 99 | .627E 11 | .588E 11 | .0 | .0 | .0 | .0 |
| | .130E 13 | .109E 13 | .212E 12 | .751E 10 | .713E 10 | .495E 10 |

CC = 30500201--ASPHALTIC CO ROTARY DRIER -- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 187

| TEMP RANGE | COUNT | |
|---|---|---|
| 0.- 100. | .428E 12 | !HHHH |
| 101.- 200. | .445E 12 | !HHHH |
| 201.- 300. | .130E 12 | !H |
| 301.- 400. | .634E 11 | !H |
| 401.- 500. | .185E 11 | !H |
| 501.- 600. | .0 | ! |
| 601.- 700. | .0 | ! |
| 701.- 800. | .0 | ! |
| 801.- 900. | .0 | ! |
| 901.-1000. | .0 | ! |
| 1001.-1100. | .0 | ! |
| 1101.-1200. | .0 | ! |
| 1201.-1300. | .0 | ! |
| 1301.-1400. | .0 | ! |
| 1401.-1500. | .0 | ! |
| 1501.-1600. | .0 | ! |
| 1601.-1700. | .0 | ! |
| 1701.-1800. | .0 | ! |
| 1801.-1900. | .0 | ! |
| 1901.-2000. | .0 | ! |
| 2001.-2100. | .0 | ! |
| 2101.-2200. | .0 | ! |
| 2201.-2300. | .0 | ! |
| 2301.-2400. | .0 | ! |
| 2401.-2500. | .0 | ! |
| 2501.-2600. | .0 | ! |
| 2601.-2700. | .0 | ! |
| 2701.-2800. | .0 | ! |
| 2801.-2900. | .0 | ! |
| 2901.-3000. | .0 | ! |

0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100

SCC= 30500201--ASPHALTIC CO ROTARY DRIER -WITH CONTROL EQUIPMENT -SIC = ) -TOT RECS = 2373

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .932E 12 | .874E 12 | .431E 12 | .0 | .0 | .0 |
| 101.- 200. | .446E 14 | .343E 14 | .984E 13 | .0 | .0 | .0 |
| 201.- 300. | .150E 14 | .114E 14 | .505E 13 | .0 | .0 | .0 |
| 301.- 400. | .246E 13 | .190E 13 | .913E 12 | .895E 11 | .849E 11 | .647E 11 |
| 401.- 500. | .539E 12 | .425E 12 | .236E 12 | .614E 11 | .583E 11 | .501E 11 |
| 501.- 600. | .145E 12 | .116E 12 | .740E 11 | .293E 11 | .278E 11 | .254E 11 |
| 601.- 700. | .259E 11 | .211E 11 | .139E 11 | .685E 10 | .651E 10 | .596E 10 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .791E 11 | .688E 11 | .0 | .445E 11 | .423E 11 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .638E 14 | .491E 14 | .166E 14 | .231E 12 | .220E 12 | .146E 12 |

SCC = 30500201--ASPHALTIC COROTARY DRIER -WITH CONTROL EQUIPMENT -TOT RECS = 2373

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 2 | .329E 11 | .249E 11 | .131E 11 | .0 | .0 | .0 |
| 10 | .312E 11 | .233E 11 | .0 | .0 | .0 | .0 |
| 12 | .606E 11 | .454E 11 | .109E 11 | .0 | .0 | .0 |
| 14 | .700E 12 | .541E 12 | .141E 12 | .438E 09 | .416E 09 | .381E 09 |
| 16 | .325E 12 | .251E 12 | .708E 11 | .371E 09 | .352E 09 | .322E 09 |
| 20 | .545E 11 | .410E 11 | .201E 11 | .0 | .0 | .0 |
| 25 | .684E 11 | .516E 11 | .256E 11 | .0 | .0 | .0 |
| 28 | .312E 11 | .233E 11 | .0 | .0 | .0 | .0 |
| 29 | .595E 14 | .458E 14 | .155E 14 | .214E 12 | .203E 12 | .131E 12 |
| 32 | .732E 12 | .566E 12 | .171E 12 | .0 | .0 | .0 |
| 35 | .155E 12 | .127E 12 | .441E 11 | .0 | .0 | .0 |
| 49 | .934E 11 | .706E 11 | .366E 11 | .0 | .0 | .0 |
| 50 | .254E 12 | .224E 12 | .123E 12 | .0 | .0 | .0 |
| 93 | .312E 11 | .233E 11 | .0 | .0 | .0 | .0 |
| 99 | .167E 13 | .127E 13 | .429E 12 | .164E 11 | .155E 11 | .142E 11 |
| | .638E 14 | .491E 14 | .166E 14 | .231E 12 | .220E 12 | .146E 12 |

CC =30500201--ASPHALTIC CO ROTARY DRIER ---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 2373

| TEMP RANGE | COUNT |
|---|---|
| 0.- 100. | .874E 12 |
| 101.- 200. | .343E 14 |
| 201.- 300. | .114E 14 |
| 301.- 400. | .190E 13 |
| 401.- 500. | .425E 12 |
| 501.- 600. | .116E 12 |
| 601.- 700. | .211E 11 |
| 701.- 800. | .0 |
| 801.- 900. | .0 |
| 901.-1000. | .0 |
| 1001.-1100. | .0 |
| 1101.-1200. | .0 |
| 1201.-1300. | .0 |
| 1301.-1400. | .0 |
| 1401.-1500. | .688E 11 |
| 1501.-1600. | .0 |
| 1601.-1700. | .0 |
| 1701.-1800. | .0 |
| 1801.-1900. | .0 |
| 1901.-2000. | .0 |
| 2001.-2100. | .0 |
| 2101.-2200. | .0 |

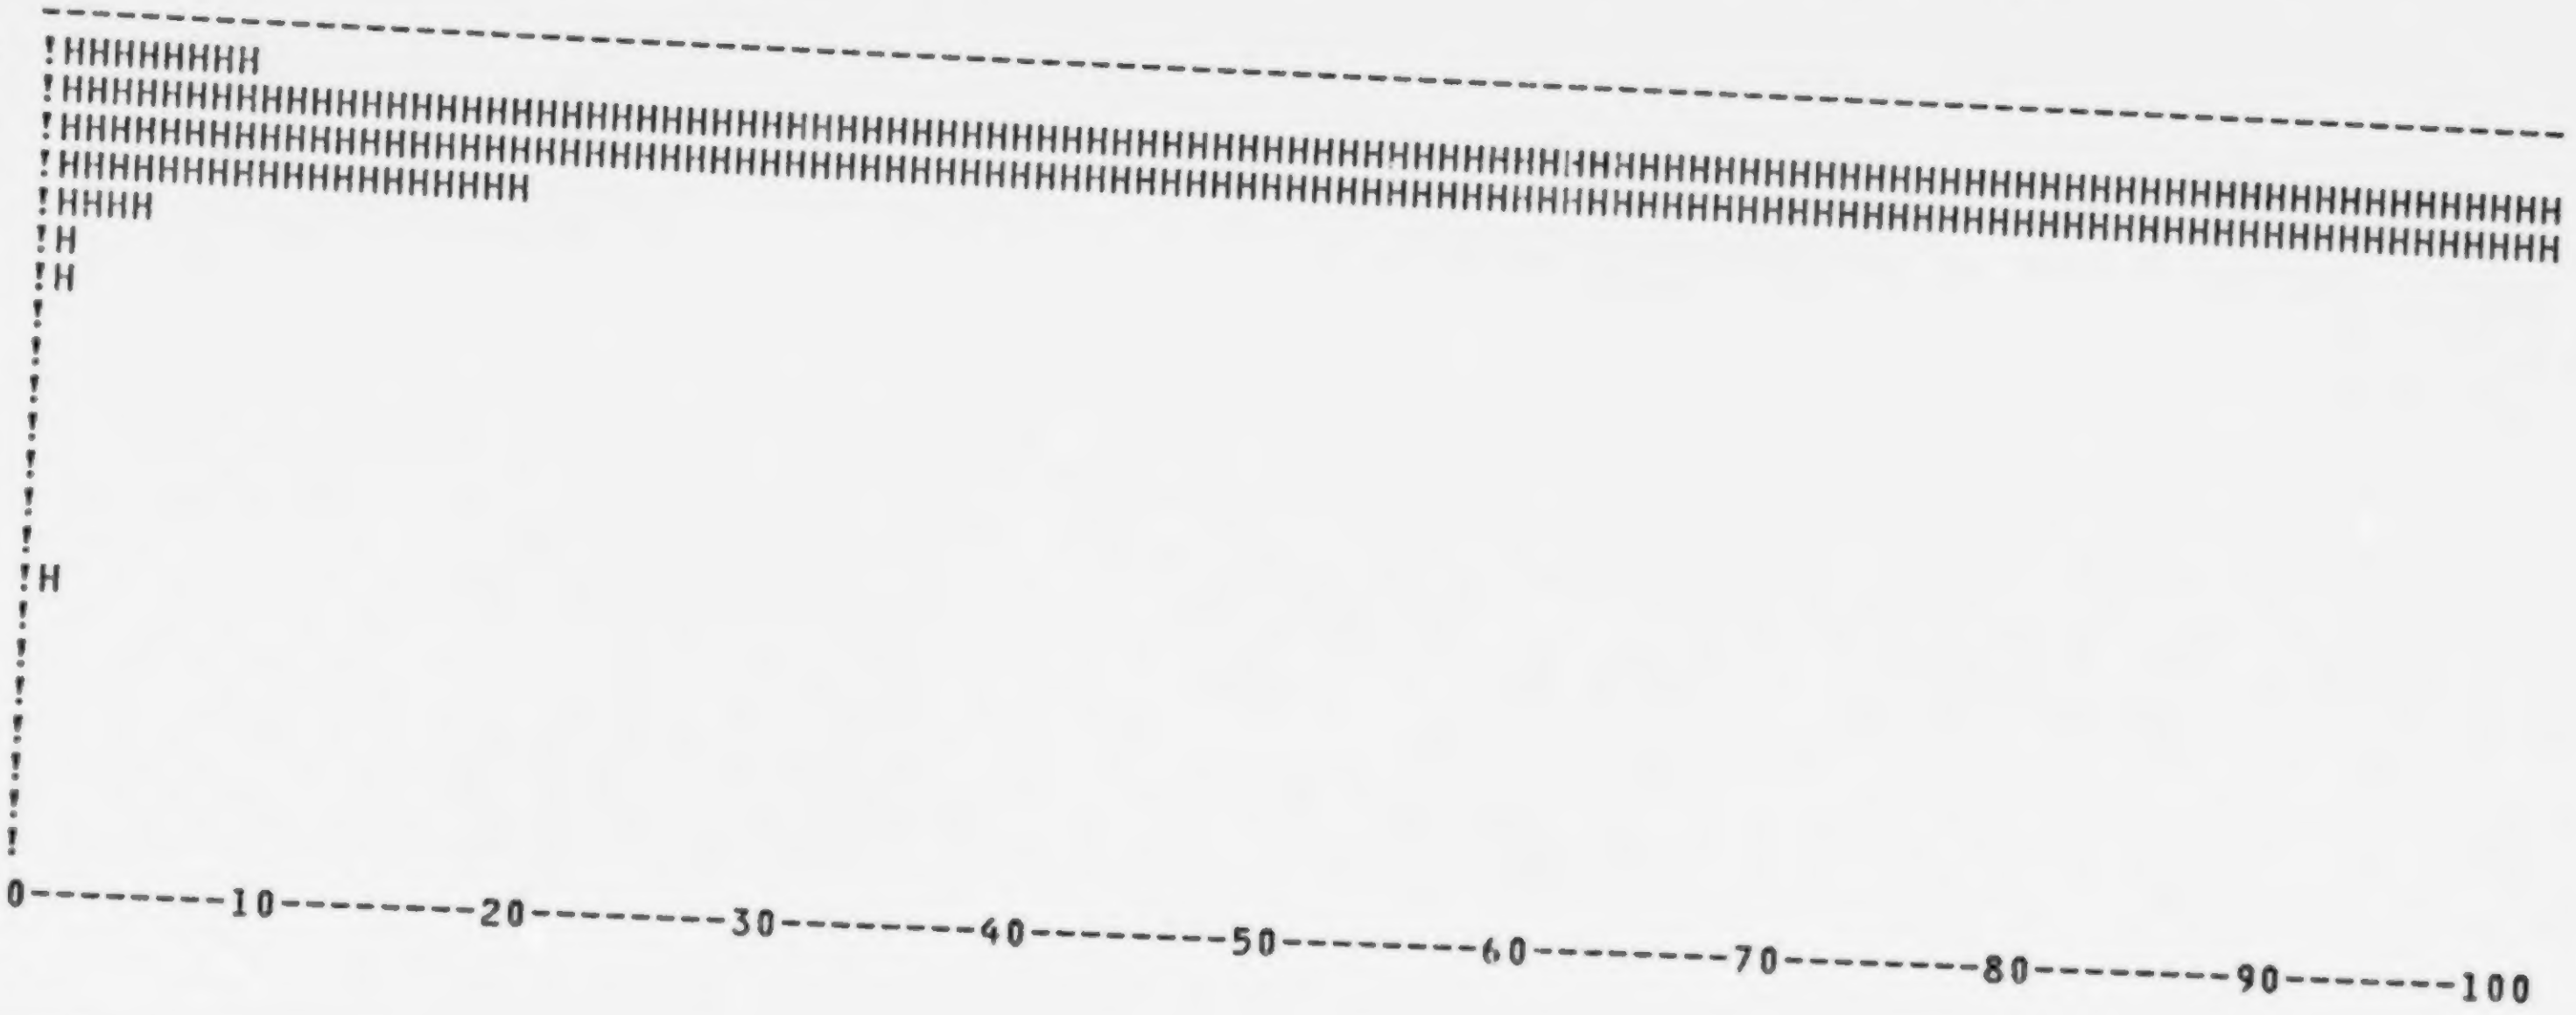

SCC= 30500201--ASPHALTIC CO ROTARY DRIER -TOTAL SCC -SIC = 0 -TOT RECS = 2560

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .139E 13 | .130E 13 | .438E 12 | .0 | .0 | .0 |
| 101.- 200. | .452E 14 | .347E 14 | .997E 13 | .0 | .0 | .0 |
| 201.- 300. | .152E 14 | .115E 14 | .510E 13 | .0 | .0 | .0 |
| 301.- 400. | .254E 13 | .196E 13 | .932E 12 | .935E 11 | .888E 11 | .666E 11 |
| 401.- 500. | .563E 12 | .443E 12 | .248E 12 | .649E 11 | .616E 11 | .532E 11 |
| 501.- 600. | .145E 12 | .116E 12 | .740E 11 | .293E 11 | .278E 11 | .254E 11 |
| 601.- 700. | .259E 11 | .211E 11 | .139E 11 | .685E 10 | .651E 10 | .596E 10 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .791E 11 | .688E 11 | .0 | .445E 11 | .423E 11 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .651E 14 | .501E 14 | .168E 14 | .239E 12 | .227E 12 | .151E 12 |

SCC = 30500201--ASPHALTIC COROTARY DRIER -TOTAL SCC -TOT RECS = 2560

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 2 | .329E 11 | .249E 11 | .131E 11 | .0 | .0 | .0 |
| 10 | .312E 11 | .233E 11 | .0 | .0 | .0 | .0 |
| 12 | .606E 11 | .454E 11 | .109E 11 | .0 | .0 | .0 |
| 14 | .710E 12 | .551E 12 | .141E 12 | .438E 09 | .416E 09 | .381E 09 |
| 16 | .332E 12 | .257E 12 | .726E 11 | .371E 09 | .352E 09 | .322E 09 |
| 20 | .545E 11 | .410E 11 | .201E 11 | .0 | .0 | .0 |
| 22 | .823E 10 | .636E 10 | .360E 10 | .302E 09 | .287E 09 | .263E 09 |
| 24 | .723E 10 | .678E 10 | .0 | .0 | .0 | .0 |
| 25 | .684E 11 | .516E 11 | .256E 11 | .0 | .0 | .0 |
| 28 | .312E 11 | .233E 11 | .0 | .0 | .0 | .0 |
| 29 | .607E 14 | .467E 14 | .157E 14 | .220E 12 | .209E 12 | .135E 12 |
| 32 | .764E 12 | .593E 12 | .179E 12 | .127E 10 | .120E 10 | .110E 10 |
| 35 | .155E 12 | .127E 12 | .441E 11 | .0 | .0 | .0 |
| 42 | .348E 10 | .327E 10 | .0 | .0 | .0 | .0 |
| 49 | .934E 11 | .706E 11 | .366E 11 | .0 | .0 | .0 |
| 50 | .254E 12 | .224E 12 | .123E 12 | .0 | .0 | .0 |
| 51 | .348E 10 | .327E 10 | .0 | .0 | .0 | .0 |
| 93 | .312E 11 | .233E 11 | .0 | .0 | .0 | .0 |
| 99 | .173E 13 | .133E 13 | .429E 12 | .164E 11 | .155E 11 | .142E 11 |
| | .651E 14 | .501E 14 | .168E 14 | .239E 12 | .227E 12 | .151E 12 |

CC 30500201--ASPHALTIC CO ROTARY DRIER --TOTAL SCC -SIC = 0 -TOT RECS = 2560

```
EMP RANGE    COUNT

                        ----------------------------------------------------------------------------------------------------
   0.- 100.  .130E 13  !HHHHHHHHHHHHHH
 101.- 200.  .347E 14  !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 201.- 300.  .115E 14  !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 301.- 400.  .196E 13  !HHHHHHHHHHHHHHHHHHHH
 401.- 500.  .443E 12  !HHHH
 501.- 600.  .116E 12  !H
 601.- 700.  .211E 11  !H
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .688E 11  !H
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500202--ASPHALTIC CO OTHER SOURCES -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 218

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .463E 12 | .434E 12 | .181E 11 | .0 | .0 | .0 |
| 101.- 200. | .135E 12 | .107E 12 | .458E 11 | .0 | .0 | .0 |
| 201.- 300. | .157E 12 | .119E 12 | .437E 11 | .0 | .0 | .0 |
| 301.- 400. | .701E 11 | .544E 11 | .311E 11 | .359E 10 | .341E 10 | .312E 10 |
| 401.- 500. | .399E 10 | .315E 10 | .190E 10 | .491E 09 | .466E 09 | .427E 09 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .829E 12 | .718E 12 | .141E 12 | .408E 10 | .387E 10 | .354E 10 |

SCC = 30500202--ASPHALTIC COOTHER SOURCES -NO CONTROL EQUIPMENT -TOT RECS = 218

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 14 | .205E 10 | .192E 10 | .0 | .0 | .0 | .0 |
| 21 | .119E 10 | .112E 10 | .0 | .0 | .0 | .0 |
| 22 | .371E 10 | .348E 10 | .0 | .0 | .0 | .0 |
| 29 | .746E 12 | .649E 12 | .117E 12 | .291E 10 | .277E 10 | .253E 10 |
| 32 | .318E 11 | .260E 11 | .107E 11 | .214E 09 | .203E 09 | .186E 09 |
| 35 | .172E 11 | .139E 11 | .589E 10 | .495E 09 | .470E 09 | .430E 09 |
| 99 | .264E 11 | .222E 11 | .663E 10 | .456E 09 | .433E 09 | .396E 09 |
| | .829E 12 | .718E 12 | .141E 12 | .408E 10 | .387E 10 | .354E 10 |

CC = 30500202--ASPHALTIC CO OTHER SOURCES -- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 218

| TEMP RANGE | COUNT | |
|---|---|---|
| 0.- 100. | .434E 12 | !HHHH |
| 101.- 200. | .107E 12 | !H |
| 201.- 300. | .119E 12 | !H |
| 301.- 400. | .544E 11 | !H |
| 401.- 500. | .315E 10 | !H |
| 501.- 600. | .0 | ! |
| 601.- 700. | .0 | ! |
| 701.- 800. | .0 | ! |
| 801.- 900. | .0 | ! |
| 901.-1000. | .0 | ! |
| 1001.-1100. | .0 | ! |
| 1101.-1200. | .0 | ! |
| 1201.-1300. | .0 | ! |
| 1301.-1400. | .0 | ! |
| 1401.-1500. | .0 | ! |
| 1501.-1600. | .0 | ! |
| 1601.-1700. | .0 | ! |
| 1701.-1800. | .0 | ! |
| 1801.-1900. | .0 | ! |
| 1901.-2000. | .0 | ! |
| 2001.-2100. | .0 | ! |
| 2101.-2200. | .0 | ! |
| 2201.-2300. | .0 | ! |
| 2301.-2400. | .0 | ! |
| 2401.-2500. | .0 | ! |
| 2501.-2600. | .0 | ! |
| 2601.-2700. | .0 | ! |
| 2701.-2800. | .0 | ! |
| 2801.-2900. | .0 | ! |
| 2901.-3000. | .0 | ! |

0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100

SCC= 30500202--ASPHALTIC CO OTHER SOURCES -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 656

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .711E 12 | .667E 12 | .123E 12 | .0 | .0 | .0 |
| 101.- 200. | .107E 14 | .822E 13 | .246E 13 | .0 | .0 | .0 |
| 201.- 300. | .336E 13 | .256E 13 | .118E 13 | .0 | .0 | .0 |
| 301.- 400. | .606E 12 | .470E 12 | .231E 12 | .255E 11 | .243E 11 | .176E 11 |
| 401.- 500. | .384E 12 | .302E 12 | .182E 12 | .452E 11 | .429E 11 | .392E 11 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .374E 11 | .303E 11 | .197E 11 | .878E 10 | .833E 10 | .762E 10 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .158E 14 | .122E 14 | .420E 13 | .795E 11 | .755E 11 | .644E 11 |

SCC = 30500202--ASPHALTIC COOTHER SOURCES -WITH CONTROL EQUIPMENT -TOT RECS = 656

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 2 | .344E 11 | .261E 11 | .136E 11 | .0 | .0 | .0 |
| 14 | .100E 12 | .770E 11 | .136E 11 | .0 | .0 | .0 |
| 15 | .928E 11 | .697E 11 | .0 | .0 | .0 | .0 |
| 16 | .437E 08 | .410E 08 | .334E 08 | .0 | .0 | .0 |
| 24 | .375E 11 | .298E 11 | .183E 11 | .0 | .0 | .0 |
| 25 | .877E 11 | .745E 11 | .265E 11 | .570E 10 | .541E 10 | .495E 10 |
| 28 | .309E 11 | .232E 11 | .0 | .0 | .0 | .0 |
| 29 | .142E 14 | .110E 14 | .373E 13 | .0 | .0 | .0 |
| 32 | .422E 12 | .346E 12 | .148E 12 | .720E 11 | .684E 11 | .580E 11 |
| 33 | .284E 11 | .213E 11 | .105E 11 | .0 | .0 | .0 |
| 49 | .685E 11 | .520E 11 | .275E 11 | .0 | .0 | .0 |
| 93 | .872E 08 | .818E 08 | .666E 08 | .0 | .0 | .0 |
| 99 | .689E 12 | .529E 12 | .212E 12 | .176E 10 | .167E 10 | .153E 10 |
| | .158E 14 | .122E 14 | .420E 13 | .795E 11 | .755E 11 | .644E 11 |

CC =30500202--ASPHALTIC CO OTHER SOURCES ---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 656

```
TEMP RANGE     COUNT
                         ----------------------------------------------------------------------------------------------------
   0.- 100.  .667E 12   !HHHHHH
 101.- 200.  .822E 13   !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 201.- 300.  .256E 13   !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 301.- 400.  .470E 12   !HHHH
 401.- 500.  .302E 12   !HHH
 501.- 600.  .0         !
 601.- 700.  .303E 11   !H
 701.- 800.  .0         !
 801.- 900.  .0         !
 901.-1000.  .0         !
1001.-1100.  .0         !
1101.-1200.  .0         !
1201.-1300.  .0         !
1301.-1400.  .0         !
1401.-1500.  .0         !
1501.-1600.  .0         !
1601.-1700.  .0         !
1701.-1800.  .0         !
1801.-1900.  .0         !
1901.-2000.  .0         !
2001.-2100.  .0         !
2101.-2200.  .0         !
2201.-2300.  .0         !
2301.-2400.  .0         !
                        !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500202--ASPHALTIC CO OTHER SOURCES -TOTAL SCC -SIC = 0 -TOT RECS = 874

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .117E 13 | .110E 13 | .141E 12 | .0 | .0 | .0 |
| 101.- 200. | .108E 14 | .833E 13 | .251E 13 | .0 | .0 | .0 |
| 201.- 300. | .352E 13 | .267E 13 | .123E 13 | .0 | .0 | .0 |
| 301.- 400. | .677E 12 | .524E 12 | .262E 12 | .291E 11 | .277E 11 | .207E 11 |
| 401.- 500. | .388E 12 | .306E 12 | .183E 12 | .456E 11 | .433E 11 | .397E 11 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .374E 11 | .303E 11 | .197E 11 | .878E 10 | .833E 10 | .762E 10 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .166E 14 | .130E 14 | .434E 13 | .836E 11 | .793E 11 | .680E 11 |

SCC = 30500202--ASPHALTIC COOTHER SOURCES -TOTAL SCC -TOT RECS = 874

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 2 | .344E 11 | .261E 11 | .136E 11 | .0 | .0 | .0 |
| 14 | .103E 12 | .790E 11 | .136E 11 | .0 | .0 | .0 |
| 15 | .928E 11 | .697E 11 | .0 | .0 | .0 | .0 |
| 16 | .437E 08 | .410E 08 | .334E 08 | .0 | .0 | .0 |
| 21 | .119E 10 | .112E 10 | .0 | .0 | .0 | .0 |
| 22 | .371E 10 | .348E 10 | .0 | .0 | .0 | .0 |
| 24 | .375E 11 | .298E 11 | .183E 11 | .0 | .0 | .0 |
| 25 | .877E 11 | .745E 11 | .265E 11 | .570E 10 | .541E 10 | .495E 10 |
| 28 | .309E 11 | .232E 11 | .0 | .0 | .0 | .0 |
| 29 | .150E 14 | .116E 14 | .385E 13 | .0 | .0 | .0 |
| 32 | .454E 12 | .372E 12 | .159E 12 | .749E 11 | .711E 11 | .605E 11 |
| 33 | .284E 11 | .213E 11 | .105E 11 | .214E 09 | .203E 09 | .186E 09 |
| 35 | .172E 11 | .139E 11 | .589E 10 | .0 | .0 | .0 |
| 49 | .685E 11 | .520E 11 | .275E 11 | .495E 09 | .470E 09 | .430E 09 |
| 93 | .872E 08 | .818E 08 | .666E 08 | .0 | .0 | .0 |
| 99 | .715E 12 | .551E 12 | .219E 12 | .221E 10 | .210E 10 | .192E 10 |
| | .166E 14 | .130E 14 | .434E 13 | .836E 11 | .793E 11 | .680E 11 |

CC 30500202--ASPHALTIC CO OTHER SOURCES --TOTAL SCC -SIC = 0 -TOT RECS = 874

```
EMP RANGE    COUNT

                        ----------------------------------------------------------------------------------------------------
   0.- 100.  .110E 13  !HHHHHHHHHHH
 101.- 200.  .833E 13  !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 201.- 300.  .267E 13  !HHHHHHHHHHHHHHHHHHHHHHHHHHH
 301.- 400.  .524E 12  !HHHHH
 401.- 500.  .306E 12  !HHH
 501.- 600.  .0        !
 601.- 700.  .303E 11  !H
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500299--ASPHALTIC CO OTHER/NOT CLASSIFIED -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 35

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .377E 11 | .354E 11 | .361E 09 | .0 | .0 | .0 |
| 101.- 200. | .174E 08 | .163E 08 | .856E 07 | .0 | .0 | .0 |
| 201.- 300. | .128E 11 | .968E 10 | .215E 10 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .505E 11 | .451E 11 | .252E 10 | .0 | .0 | .0 |

SCC = 30500299--ASPHALTIC COOTHER/NOT CLASSIFIED -NO CONTROL EQUIPMENT -TOT RECS = 35

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 14 | .157E 10 | .147E 10 | .135E 08 | .0 | .0 | .0 |
| 28 | .465E 10 | .436E 10 | .0 | .0 | .0 | .0 |
| 29 | .412E 11 | .363E 11 | .250E 10 | .0 | .0 | .0 |
| 32 | .155E 10 | .145E 10 | .0 | .0 | .0 | .0 |
| 99 | .157E 10 | .147E 10 | .856E 07 | .0 | .0 | .0 |
| | .505E 11 | .451E 11 | .252E 10 | .0 | .0 | .0 |

CC = 30500299--ASPHALTIC CO OTHER/NOT CLASSIFIED-- -NO CONTROL EQUIPMENT -SIC= ) -TOTAL RECS = 35

```
TEMP RANGE   COUNT
                      -------------------------------------------------------------------------------------------------------
   0.- 100.  .354E 11 !H
 101.- 200.  .163E 08 !
 201.- 300.  .968E 10 !H
 301.- 400.  .0       !
 401.- 500.  .0       !
 501.- 600.  .0       !
 601.- 700.  .0       !
 701.- 800.  .0       !
 801.- 900.  .0       !
 901.-1000.  .0       !
1001.-1100.  .0       !
1101.-1200.  .0       !
1201.-1300.  .0       !
1301.-1400.  .0       !
1401.-1500.  .0       !
1501.-1600.  .0       !
1601.-1700.  .0       !
1701.-1800.  .0       !
1801.-1900.  .0       !
1901.-2000.  .0       !
2001.-2100.  .0       !
2101.-2200.  .0       !
2201.-2300.  .0       !
2301.-2400.  .0       !
2401.-2500.  .0       !
2501.-2600.  .0       !
2601.-2700.  .0       !
2701.-2800.  .0       !
2801.-2900.  .0       !
2901.-3000.  .0       !
                      0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500299--ASPHALTIC CO OTHER/NOT CLASSIFIED -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 98

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .126E 12 | .118E 12 | .412E 11 | .0 | .0 | .0 |
| 101.- 200. | .101E 13 | .816E 12 | .307E 12 | .0 | .0 | .0 |
| 201.- 300. | .467E 12 | .355E 12 | .144E 12 | .0 | .0 | .0 |
| 301.- 400. | .104E 12 | .797E 11 | .323E 11 | .175E 10 | .166E 10 | .107E 10 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .171E 13 | .137E 13 | .525E 12 | .175E 10 | .166E 10 | .107E 10 |

SCC = 30500299--ASPHALTIC COOTHER/NOT CLASSIFIED -WITH CONTROL EQUIPMENT -TOT RECS = 98

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 14 | .438E 10 | .411E 10 | .0 | .0 | .0 | .0 |
| 25 | .389E 11 | .290E 11 | .144E 11 | .0 | .0 | .0 |
| 29 | .148E 13 | .119E 13 | .448E 12 | .175E 10 | .166E 10 | .107E 10 |
| 32 | .177E 12 | .144E 12 | .608E 11 | .0 | .0 | .0 |
| 35 | .370E 10 | .280E 10 | .147E 10 | .0 | .0 | .0 |
| 99 | .438E 10 | .411E 10 | .0 | .0 | .0 | .0 |
| | .171E 13 | .137E 13 | .525E 12 | .175E 10 | .166E 10 | .107E 10 |

CC =30500299--ASPHALTIC CO OTHER/NOT CLASSIFIED---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 98

```
TEMP RANGE   COUNT
                     ----------------------------------------------------------------------------------------------------
   0.- 100.  .118E 12  !H
 101.- 200.  .816E 12  !HHHHHHHH
 201.- 300.  .355E 12  !HHH
 301.- 400.  .797E 11  !H
 401.- 500.  .0        !
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500299--ASPHALTIC CO OTHER/NOT CLASSIFIED -TOTAL SCC -SIC = 0 -TOT RECS = 133

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .164E 12 | .154E 12 | .415E 11 | .0 | .0 | .0 |
| 101.- 200. | .101E 13 | .816E 12 | .307E 12 | .0 | .0 | .0 |
| 201.- 300. | .480E 12 | .365E 12 | .147E 12 | .0 | .0 | .0 |
| 301.- 400. | .104E 12 | .797E 11 | .323E 11 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .175E 10 | .166E 10 | .107E 10 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .176E 13 | .141E 13 | .527E 12 | .175E 10 | .166E 10 | .107E 10 |

SCC = 30500299--ASPHALTIC COOTHER/NOT CLASSIFIED -TOTAL SCC -TOT RECS = 133

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 14 | .595E 10 | .558E 10 | .135E 08 | .0 | .0 | .0 |
| 25 | .389E 11 | .290E 11 | .144E 11 | .0 | .0 | .0 |
| 28 | .465E 10 | .436E 10 | .0 | .0 | .0 | .0 |
| 29 | .152E 13 | .122E 13 | .451E 12 | .175E 10 | .166E 10 | .107E 10 |
| 32 | .179E 12 | .145E 12 | .608E 11 | .0 | .0 | .0 |
| 35 | .370E 10 | .280E 10 | .147E 10 | .0 | .0 | .0 |
| 99 | .595E 10 | .558E 10 | .856E 07 | .0 | .0 | .0 |
| | .176E 13 | .141E 13 | .527E 12 | .175E 10 | .166E 10 | .107E 10 |

CC 30500299--ASPHALTIC CO OTHER/NOT CLASSIFIED--TOTAL SCC -SIC = 0 -TOT RECS = 133

```
EMP RANGE   COUNT
                      ------------------------------------------------------------------------------------------------------
   0.- 100.  .154E 12  !H
 101.- 200.  .816E 12  !HHHHHHHH
 201.- 300.  .365E 12  !HHH
 301.- 400.  .797E 11  !H
 401.- 500.  .0        !
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500301--BRICK MANUF DRYING-RAW MATERIAL -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 64

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .556E 12 | .522E 12 | .122E 11 | .0 | .0 | .0 |
| 101.- 200. | .204E 12 | .171E 12 | .388E 11 | .0 | .0 | .0 |
| 201.- 300. | .390E 12 | .299E 12 | .629E 09 | .0 | .0 | .0 |
| 301.- 400. | .137E 12 | .107E 12 | .622E 11 | .102E 11 | .967E 10 | .885E 10 |
| 401.- 500. | .294E 12 | .232E 12 | .108E 12 | .379E 11 | .360E 11 | .241E 11 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .147E 12 | .123E 12 | .865E 11 | .545E 11 | .518E 11 | .473E 11 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .275E 11 | .237E 11 | .180E 11 | .144E 11 | .137E 11 | .125E 11 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .176E 13 | .148E 13 | .326E 12 | .117E 12 | .111E 12 | .927E 11 |

SCC = 30500301--BRICK MANUF DRYING-RAW MATERIAL -NO CONTROL EQUIPMENT -TOT RECS = 64

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .173E 13 | .146E 13 | .326E 12 | .117E 12 | .111E 12 | .927E 11 |
| 35 | .219E 11 | .205E 11 | .0 | .0 | .0 | .0 |
| | .176E 13 | .148E 13 | .326E 12 | .117E 12 | .111E 12 | .927E 11 |

CC = 30500301--BRICK MANUF DRYING-RAW MATERIAL -- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 64

```
TEMP RANGE   COUNT
                      ---------------------------------------------------------------------------------------------------
   0.- 100.  .522E 12  !HHHHH
 101.- 200.  .171E 12  !H
 201.- 300.  .299E 12  !HH
 301.- 400.  .107E 12  !H
 401.- 500.  .232E 12  !HH
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .123E 12  !H
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .237E 11  !H
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500301--BRICK MANUF DRYING-RAW MATERIAL -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 43

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .844E 11 | .791E 11 | .521E 10 | .0 | .0 | .0 |
| 101.- 200. | .104E 13 | .780E 12 | .315E 12 | .0 | .0 | .0 |
| 201.- 300. | .802E 12 | .611E 12 | .209E 12 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .209E 12 | .166E 12 | .102E 12 | .314E 11 | .299E 11 | .273E 11 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .856E 11 | .697E 11 | .459E 11 | .220E 11 | .209E 11 | .191E 11 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .222E 13 | .171E 13 | .677E 12 | .535E 11 | .508E 11 | .465E 11 |

SCC = 30500301--BRICK MANUF DRYING-RAW MATERIAL -WITH CONTROL EQUIPMENT -TOT RECS = 43

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 14 | .590E 12 | .446E 12 | .231E 12 | .0 | .0 | .0 |
| 29 | .147E 12 | .117E 12 | .483E 11 | .0 | .0 | .0 |
| 32 | .140E 13 | .107E 13 | .351E 12 | .314E 11 | .299E 11 | .273E 11 |
| 33 | .609E 09 | .571E 09 | .465E 09 | .0 | .0 | .0 |
| 37 | .856E 11 | .697E 11 | .459E 11 | .220E 11 | .209E 11 | .191E 11 |
| | .222E 13 | .171E 13 | .677E 12 | .535E 11 | .508E 11 | .465E 11 |

CC =30500301--BRICK MANUF DRYING-RAW MATERIAL ---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 43

```
TEMP RANGE     COUNT
                         ------------------------------------------------------------------------------------------------------
   0.- 100.   .791E 11   !H
 101.- 200.   .780E 12   !HHHHHHH
 201.- 300.   .611E 12   !HHHHHH
 301.- 400.   .0         !
 401.- 500.   .166E 12   !H
 501.- 600.   .0         !
 601.- 700.   .697E 11   !H
 701.- 800.   .0         !
 801.- 900.   .0         !
 901.-1000.   .0         !
1001.-1100.   .0         !
1101.-1200.   .0         !
1201.-1300.   .0         !
1301.-1400.   .0         !
1401.-1500.   .0         !
1501.-1600.   .0         !
1601.-1700.   .0         !
1701.-1800.   .0         !
1801.-1900.   .0         !
1901.-2000.   .0         !
2001.-2100.   .0         !
2101.-2200.   .0         !
2201.-2300.   .0         !
2301.-2400.   .0         !
2401.-2500.   .0         !
2501.-2600.   .0         !
2601.-2700.   .0         !
2701.-2800.   .0         !
2801.-2900.   .0         !
2901.-3000.   .0         !
                         0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500301--BRICK MANUF DRYING-RAW MATERIAL -TOTAL SCC -SIC = 0 -TOT RECS = 107

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .641E 12 | .601E 12 | .175E 11 | .0 | .0 | .0 |
| 101.- 200. | .124E 13 | .951E 12 | .353E 12 | .0 | .0 | .0 |
| 201.- 300. | .119E 13 | .910E 12 | .210E 12 | .0 | .0 | .0 |
| 301.- 400. | .137E 12 | .107E 12 | .622E 11 | .102E 11 | .967E 10 | .885E 10 |
| 401.- 500. | .503E 12 | .398E 12 | .210E 12 | .693E 11 | .658E 11 | .514E 11 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .856E 11 | .697E 11 | .459E 11 | .220E 11 | .209E 11 | .191E 11 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .147E 12 | .123E 12 | .865E 11 | .545E 11 | .518E 11 | .473E 11 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .275E 11 | .237E 11 | .180E 11 | .144E 11 | .137E 11 | .125E 11 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .398E 13 | .318E 13 | .100E 13 | .170E 12 | .162E 12 | .139E 12 |

SCC = 30500301--BRICK MANUF DRYING-RAW MATERIAL -TOTAL SCC -TOT RECS = 107

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 14 | .590E 12 | .446E 12 | .231E 12 | .0 | .0 | .0 |
| 29 | .147E 12 | .117E 12 | .483E 11 | .0 | .0 | .0 |
| 32 | .313E 13 | .253E 13 | .677E 12 | .148E 12 | .141E 12 | .120E 12 |
| 33 | .609E 09 | .571E 09 | .465E 09 | .0 | .0 | .0 |
| 35 | .219E 11 | .205E 11 | .0 | .0 | .0 | .0 |
| 37 | .856E 11 | .697E 11 | .459E 11 | .220E 11 | .209E 11 | .191E 11 |
| | .397E 13 | .318E 13 | .100E 13 | .170E 12 | .162E 12 | .139E 12 |

CC 30500301--BRICK MANUF DRYING-RAW MATERIAL --TOTAL SCC -SIC = 0 -TOT RECS = 107

```
EMP RANGE    COUNT

                        ------------------------------------------------------------------------------------------------------
   0.- 100.   .601E 12  !HHHHHH
 101.- 200.   .951E 12  !HHHHHHHHH
 201.- 300.   .910E 12  !HHHHHHHHH
 301.- 400.   .107E 12  !H
 401.- 500.   .398E 12  !HHH
 501.- 600.   .0        !
 601.- 700.   .697E 11  !H
 701.- 800.   .0        !
 801.- 900.   .123E 12  !H
 901.-1000.   .0        !
1001.-1100.   .0        !
1101.-1200.   .0        !
1201.-1300.   .0        !
1301.-1400.   .237E 11  !H
1401.-1500.   .0        !
1501.-1600.   .0        !
1601.-1700.   .0        !
1701.-1800.   .0        !
1801.-1900.   .0        !
1901.-2000.   .0        !
2001.-2100.   .0        !
2101.-2200.   .0        !
2201.-2300.   .0        !
2301.-2400.   .0        !
2401.-2500.   .0        !
2501.-2600.   .0        !
2601.-2700.   .0        !
2701.-2800.   .0        !
2801.-2900.   .0        !
2901.-3000.   .0        !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500302--BRICK MANUF  GRINDING-RAW MATERIA -NO CONTROL EQUIPMENT -SIC =    0  -TOT RECS =    63

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .418E 12 | .392E 12 | .121E 11 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .500E 11 | .384E 11 | .629E 09 | .0 | .0 | .0 |
| 301.- 400. | .137E 12 | .107E 12 | .622E 11 | .0 | .0 | .0 |
| 401.- 500. | .273E 11 | .217E 11 | .134E 11 | .102E 11 | .967E 10 | .885E 10 |
| 501.- 600. | .0 | .0 | .0 | .415E 10 | .394E 10 | .361E 10 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .632E 12 | .559E 12 | .883E 11 | .143E 11 | .136E 11 | .125E 11 |

SCC = 30500302--BRICK MANUF GRINDING-RAW MATERIA -NO CONTROL EQUIPMENT -TOT RECS = 63

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .596E 12 | .529E 12 | .750E 11 | .102E 11 | .967E 10 | .885E 10 |
| 35 | .922E 10 | .865E 10 | .0 | .0 | .0 | .0 |
| 99 | .273E 11 | .217E 11 | .134E 11 | .415E 10 | .394E 10 | .361E 10 |
| | .632E 12 | .559E 12 | .883E 11 | .143E 11 | .136E 11 | .125E 11 |

CC = 30500302--BRICK MANUF GRINDING-RAW MATERIA-- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 63

```
TEMP RANGE   COUNT
                   ------------------------------------------------------------------------------------------------------
   0.- 100.  .392E 12  !HHH
 101.- 200.  .0        !
 201.- 300.  .384E 11  !H
 301.- 400.  .107E 12  !H
 401.- 500.  .217E 11  !H
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500302--BRICK MANUF GRINDING-RAW MATERIA -WITH CONTROL EQUIPMENT -SIC = ) -TOT RECS = 100

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .107E 13 | .100E 13 | .988E 11 | .0 | .0 | .0 |
| 101.- 200. | .124E 12 | .937E 11 | .190E 11 | .0 | .0 | .0 |
| 201.- 300. | .135E 12 | .102E 12 | .219E 11 | .0 | .0 | .0 |
| 301.- 400. | .913E 11 | .706E 11 | .453E 09 | .339E 10 | .322E 10 | .644E 08 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .142E 13 | .127E 13 | .140E 12 | .339E 10 | .322E 10 | .644E 08 |

SCC = 30500302--BRICK MANUF GRINDING-RAW MATERIA -WITH CONTROL EQUIPMENT -TOT RECS = 100

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 29 | .113E 12 | .982E 11 | .194E 11 | .0 | .0 | .0 |
| 32 | .127E 13 | .114E 13 | .121E 12 | .339E 10 | .322E 10 | .644E 08 |
| 35 | .163E 11 | .153E 11 | .0 | .0 | .0 | .0 |
| 99 | .163E 11 | .153E 11 | .0 | .0 | .0 | .0 |
| | .142E 13 | .127E 13 | .140E 12 | .339E 10 | .322E 10 | .644E 08 |

CC =30500302--BRICK MANUF GRINDING-RAW MATERIA---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 100

```
TEMP RANGE    COUNT

                        -----------------------------------------------------------------------------------------------------
   0.- 100.   .100E 13  !HHHHHHHHHH
 101.- 200.   .937E 11  !H
 201.- 300.   .102E 12  !H
 301.- 400.   .706E 11  !H
 401.- 500.   .0        !
 501.- 600.   .0        !
 601.- 700.   .0        !
 701.- 800.   .0        !
 801.- 900.   .0        !
 901.-1000.   .0        !
1001.-1100.   .0        !
1101.-1200.   .0        !
1201.-1300.   .0        !
1301.-1400.   .0        !
1401.-1500.   .0        !
1501.-1600.   .0        !
1601.-1700.   .0        !
1701.-1800.   .0        !
1801.-1900.   .0        !
1901.-2000.   .0        !
2001.-2100.   .0        !
2101.-2200.   .0        !
2201.-2300.   .0        !
2301.-2400.   .0        !
2401.-2500.   .0        !
2501.-2600.   .0        !
2601.-2700.   .0        !
2701.-2800.   .0        !
2801.-2900.   .0        !
2901.-3000.   .0        !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500302--BRICK MANUF GRINDING-RAW MATERIA -TOTAL SCC -SIC = 0 -TOT RECS = 163

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .149E 13 | .139E 13 | .111E 12 | .0 | .0 | .0 |
| 101.- 200. | .124E 12 | .937E 11 | .190E 11 | .0 | .0 | .0 |
| 201.- 300. | .185E 12 | .141E 12 | .225E 11 | .0 | .0 | .0 |
| 301.- 400. | .228E 12 | .178E 12 | .627E 11 | .136E 11 | .129E 11 | .891E 10 |
| 401.- 500. | .273E 11 | .217E 11 | .134E 11 | .415E 10 | .394E 10 | .361E 10 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .205E 13 | .183E 13 | .228E 12 | .177E 11 | .168E 11 | .125E 11 |

SCC = 30500302--BRICK MANUF GRINDING-RAW MATERIA -TOTAL SCC -TOT RECS = 163

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 29 | .113E 12 | .982E 11 | .194E 11 | .0 | .0 | .0 |
| 32 | .187E 13 | .167E 13 | .196E 12 | .136E 11 | .129E 11 | .891E 10 |
| 35 | .255E 11 | .239E 11 | .0 | .0 | .0 | .0 |
| 99 | .436E 11 | .370E 11 | .134E 11 | .415E 10 | .394E 10 | .361E 10 |
| | .205E 13 | .183E 13 | .228E 12 | .177E 11 | .168E 11 | .125E 11 |

CC 30500302--BRICK MANUF GRINDING-RAW MATERIA--TOTAL SCC -SIC = 0 -TOT RECS = 163

```
EMP RANGE     COUNT

                           ------------------------------------------------------------------------------------------------------
    0.- 100.  .139E 13    !HHHHHHHHHHHHH
  101.- 200.  .937E 11    !H
  201.- 300.  .141E 12    !H
  301.- 400.  .178E 12    !H
  401.- 500.  .217E 11    !H
  501.- 600.  .0          !
  601.- 700.  .0          !
  701.- 800.  .0          !
  801.- 900.  .0          !
  901.-1000.  .0          !
 1001.-1100.  .0          !
 1101.-1200.  .0          !
 1201.-1300.  .0          !
 1301.-1400.  .0          !
 1401.-1500.  .0          !
 1501.-1600.  .0          !
 1601.-1700.  .0          !
 1701.-1800.  .0          !
 1801.-1900.  .0          !
 1901.-2000.  .0          !
 2001.-2100.  .0          !
 2101.-2200.  .0          !
 2201.-2300.  .0          !
 2301.-2400.  .0          !
 2401.-2500.  .0          !
 2501.-2600.  .0          !
 2601.-2700.  .0          !
 2701.-2800.  .0          !
 2801.-2900.  .0          !
 2901.-3000.  .0          !
                          0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500303--BRICK MANUF STORAGE-RAW MATERIAL -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 69

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .213E 12 | .200E 12 | .223E 09 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .150E 10 | .115E 10 | .629E 09 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .107E 12 | .854E 11 | .525E 11 | .163E 11 | .155E 11 | .142E 11 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .322E 12 | .287E 12 | .534E 11 | .163E 11 | .155E 11 | .142E 11 |

SCC = 30500303--BRICK MANUF STORAGE-RAW MATERIAL -NO CONTROL EQUIPMENT -TOT RECS = 69

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .322E 12 | .287E 12 | .534E 11 | .163E 11 | .155E 11 | .142E 11 |
| | .322E 12 | .287E 12 | .534E 11 | .163E 11 | .155E 11 | .142E 11 |

CC = 30500303--BRICK MANUF STORAGE-RAW MATERIAL-- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 69

```
TEMP RANGE   COUNT
                     ------------------------------------------------------------------------------------------------------
   0.- 100.  .200E 12  !HH
 101.- 200.  .0        !
 201.- 300.  .115E 10  !H
 301.- 400.  .0        !
 401.- 500.  .854E 11  !H
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500303--BRICK MANUF STORAGE-RAW MATERIAL -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 29

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .267E 11 | .251E 11 | .196E 10 | .0 | .0 | .0 |
| 101.- 200. | .125E 11 | .117E 11 | .577E 10 | .0 | .0 | .0 |
| 201.- 300. | .683E 10 | .517E 10 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .460E 11 | .420E 11 | .772E 10 | .0 | .0 | .0 |

SCC = 30500303--BRICK MANUF STORAGE-RAW MATERIAL -WITH CONTROL EQUIPMENT -TOT RECS = 29

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 29 | .125E 11 | .117E 11 | .577E 10 | .0 | .0 | .0 |
| 32 | .335E 11 | .302E 11 | .193E 10 | .0 | .0 | .0 |
| 36 | .344E 08 | .322E 08 | .263E 08 | .0 | .0 | .0 |
| | .460E 11 | .420E 11 | .772E 10 | .0 | .0 | .0 |

CC =30500303--BRICK MANUF STORAGE-RAW MATERIAL---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 29

| TEMP RANGE | COUNT |
|---|---|
| 0.- 100. | .251E 11 |
| 101.- 200. | .117E 11 |
| 201.- 300. | .517E 10 |
| 301.- 400. | .0 |
| 401.- 500. | .0 |
| 501.- 600. | .0 |
| 601.- 700. | .0 |
| 701.- 800. | .0 |
| 801.- 900. | .0 |
| 901.-1000. | .0 |
| 1001.-1100. | .0 |
| 1101.-1200. | .0 |
| 1201.-1300. | .0 |
| 1301.-1400. | .0 |
| 1401.-1500. | .0 |
| 1501.-1600. | .0 |
| 1601.-1700. | .0 |
| 1701.-1800. | .0 |
| 1801.-1900. | .0 |
| 1901.-2000. | .0 |
| 2001.-2100. | .0 |
| 2101.-2200. | .0 |
| 2201.-2300. | .0 |
| 2301.-2400. | .0 |
| 2401.-2500. | .0 |
| 2501.-2600. | .0 |
| 2601.-2700. | .0 |
| 2701.-2800. | .0 |
| 2801.-2900. | .0 |
| 2901.-3000. | .0 |

SCC= 30500303--BRICK MANUF STORAGE-RAW MATERIAL -TOTAL SCC -SIC = 0 -TOT RECS = 98

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .240E 12 | .225E 12 | .218E 10 | .0 | .0 | .0 |
| 101.- 200. | .125E 11 | .117E 11 | .577E 10 | .0 | .0 | .0 |
| 201.- 300. | .832E 10 | .632E 10 | .629E 09 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .107E 12 | .854E 11 | .525E 11 | .163E 11 | .155E 11 | .142E 11 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .368E 12 | .329E 12 | .611E 11 | .163E 11 | .155E 11 | .142E 11 |

SCC = 30500303--BRICK MANUF STORAGE-RAW MATERIAL -TOTAL SCC -TOT RECS = 98

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 29 | .125E 11 | .117E 11 | .577E 10 | .0 | .0 | .0 |
| 32 | .356E 12 | .317E 12 | .553E 11 | .163E 11 | .155E 11 | .142E 11 |
| 36 | .344E 08 | .322E 08 | .263E 08 | .0 | .0 | .0 |
| | .368E 12 | .329E 12 | .611E 11 | .163E 11 | .155E 11 | .142E 11 |

CC 30500303--BRICK MANUF STORAGE-RAW MATERIAL--TOTAL SCC -SIC = 0 -TOT RECS = 98

```
EMP RANGE     COUNT
                       ------------------------------------------------------------------------------------------------------
   0.- 100.  .225E 12  !HH
 101.- 200.  .117E 11  !H
 201.- 300.  .632E 10  !H
 301.- 400.  .0        !
 401.- 500.  .854E 11  !H
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500304--BRICK MANUF CURING GAS FIRED -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 247

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .257E 12 | .241E 12 | .902E 11 | .0 | .0 | .0 |
| 101.- 200. | .146E 13 | .112E 13 | .473E 12 | .0 | .0 | .0 |
| 201.- 300. | .376E 13 | .287E 13 | .107E 13 | .0 | .0 | .0 |
| 301.- 400. | .387E 13 | .301E 13 | .121E 13 | .233E 12 | .221E 12 | .132E 12 |
| 401.- 500. | .250E 13 | .197E 13 | .119E 13 | .314E 12 | .299E 12 | .273E 12 |
| 501.- 600. | .290E 13 | .234E 13 | .964E 12 | .631E 12 | .599E 12 | .340E 12 |
| 601.- 700. | .626E 12 | .513E 12 | .240E 12 | .175E 12 | .166E 12 | .107E 12 |
| 701.- 800. | .705E 12 | .581E 12 | .393E 12 | .216E 12 | .206E 12 | .188E 12 |
| 801.- 900. | .657E 12 | .549E 12 | .386E 12 | .245E 12 | .233E 12 | .213E 12 |
| 901.-1000. | .227E 12 | .192E 12 | .0 | .935E 11 | .890E 11 | .0 |
| 1001.-1100. | .216E 12 | .184E 12 | .134E 12 | .955E 11 | .909E 11 | .828E 11 |
| 1101.-1200. | .256E 12 | .219E 12 | .0 | .121E 12 | .115E 12 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .115E 10 | .101E 10 | .780E 09 | .668E 09 | .635E 09 | .563E 09 |
| 1601.-1700. | .330E 12 | .289E 12 | .0 | .197E 12 | .187E 12 | .0 |
| 1701.-1800. | .205E 13 | .180E 13 | .427E 10 | .125E 13 | .119E 13 | .307E 10 |
| 1801.-1900. | .212E 13 | .187E 13 | .0 | .132E 13 | .126E 13 | .0 |
| 1901.-2000. | .178E 14 | .157E 14 | .252E 11 | .114E 14 | .108E 14 | .180E 11 |
| 2001.-2100. | .234E 13 | .208E 13 | .0 | .156E 13 | .146E 13 | .0 |
| 2101.-2200. | .244E 13 | .216E 13 | .0 | .165E 13 | .153E 13 | .0 |
| 2201.-2300. | .855E 12 | .760E 12 | .0 | .594E 12 | .546E 12 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .469E 12 | .418E 12 | .0 | .341E 12 | .307E 12 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .458E 14 | .389E 14 | .618E 13 | .205E 14 | .194E 14 | .136E 13 |

SCC = 30500304--BRICK MANUF CURING GAS FIRED -NO CONTROL EQUIPMENT -TOT RECS = 247

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 14 | .764E 11 | .574E 11 | .291E 11 | .0 | .0 | .0 |
| 24 | .118E 12 | .882E 11 | .0 | .0 | .0 | .0 |
| 32 | .454E 14 | .385E 14 | .611E 13 | .204E 14 | .193E 14 | .135E 13 |
| 99 | .267E 12 | .217E 12 | .401E 11 | .646E 11 | .614E 11 | .108E 11 |
| | .458E 14 | .389E 14 | .618E 13 | .205E 14 | .193E 14 | .136E 13 |

CC = 30500304--BRICK MANUF CURING GAS FIRED -- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 247

```
TEMP RANGE   COUNT
                        ----------------------------------------------------------------------------------------------------
   0.- 100.  .241E 12  !HH
 101.- 200.  .112E 13  !HHHHHHHHHHH
 201.- 300.  .287E 13  !HHHHHHHHHHHHHHHHHHHHHHHHHHHH
 301.- 400.  .301E 13  !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 401.- 500.  .197E 13  !HHHHHHHHHHHHHHHHHHH
 501.- 600.  .234E 13  !HHHHHHHHHHHHHHHHHHHHHHH
 601.- 700.  .513E 12  !HHHHH
 701.- 800.  .581E 12  !HHHHH
 801.- 900.  .549E 12  !HHHHH
 901.-1000.  .192E 12  !H
1001.-1100.  .184E 12  !H
1101.-1200.  .219E 12  !HH
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .101E 10  !H
1601.-1700.  .289E 12  !HH
1701.-1800.  .180E 13  !HHHHHHHHHHHHHHHHHH
1801.-1900.  .187E 13  !HHHHHHHHHHHHHHHHHH
1901.-2000.  .157E 14  !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
2001.-2100.  .208E 13  !HHHHHHHHHHHHHHHHHHHH
2101.-2200.  .216E 13  !HHHHHHHHHHHHHHHHHHHHH
2201.-2300.  .760E 12  !HHHHHHH
2301.-2400.  .0        !
2401.-2500.  .418E 12  !HHHH
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500304--BRICK MANUF  CURING GAS FIRED     -WITH CONTROL EQUIPMENT -SIC =    0 -TOT RECS =     14

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .490E 11 | .459E 11 | .643E 10 | .0 | .0 | .0 |
| 101.- 200. | .786E 11 | .738E 11 | .363E 11 | .0 | .0 | .0 |
| 201.- 300. | .442E 11 | .335E 11 | .0 | .0 | .0 | .0 |
| 301.- 400. | .516E 11 | .402E 11 | .0 | .383E 10 | .364E 10 | .0 |
| 401.- 500. | .150E 12 | .118E 12 | .696E 11 | .147E 11 | .139E 11 | .127E 11 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .125E 12 | .110E 12 | .0 | .783E 11 | .743E 11 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .140E 12 | .124E 12 | .0 | .934E 11 | .875E 11 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .639E 12 | .546E 12 | .112E 12 | .190E 12 | .179E 12 | .127E 11 |

SCC = 30500304--BRICK MANUF CURING GAS FIRED -WITH CONTROL EQUIPMENT -TOT RECS = 14

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .639E 12 | .546E 12 | .112E 12 | .190E 12 | .179E 12 | .127E 11 |
| | .639E 12 | .546E 12 | .112E 12 | .190E 12 | .179E 12 | .127E 11 |

CC =30500304--BRICK MANUF CURING GAS FIRED ---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 14

| TEMP RANGE | COUNT | |
|---|---|---|
| 0.- 100. | .459E 11 | !H |
| 101.- 200. | .738E 11 | !H |
| 201.- 300. | .335E 11 | !H |
| 301.- 400. | .402E 11 | !H |
| 401.- 500. | .118E 12 | !H |
| 501.- 600. | .0 | ! |
| 601.- 700. | .0 | ! |
| 701.- 800. | .0 | ! |
| 801.- 900. | .0 | ! |
| 901.-1000. | .0 | ! |
| 1001.-1100. | .0 | ! |
| 1101.-1200. | .0 | ! |
| 1201.-1300. | .0 | ! |
| 1301.-1400. | .0 | ! |
| 1401.-1500. | .0 | ! |
| 1501.-1600. | .0 | ! |
| 1601.-1700. | .0 | ! |
| 1701.-1800. | .0 | ! |
| 1801.-1900. | .110E 12 | !H |
| 1901.-2000. | .0 | ! |
| 2001.-2100. | .124E 12 | !H |
| 2101.-2200. | .0 | ! |
| 2201.-2300. | .0 | ! |
| 2301.-2400. | .0 | ! |
| 2401.-2500. | .0 | ! |
| 2501.-2600. | .0 | ! |
| 2601.-2700. | .0 | ! |
| 2701.-2800. | .0 | ! |
| 2801.-2900. | .0 | ! |
| 2901.-3000. | .0 | ! |

0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100

SCC= 30500304--BRICK MANUF CURING GAS FIRED -TOTAL SCC -SIC = 0 -TOT RECS = 261

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .306E 12 | .287E 12 | .966E 11 | .0 | .0 | .0 |
| 101.- 200. | .154E 13 | .119E 13 | .509E 12 | .0 | .0 | .0 |
| 201.- 300. | .380E 13 | .290E 13 | .107E 13 | .0 | .0 | .0 |
| 301.- 400. | .392E 13 | .305E 13 | .121E 13 | .237E 12 | .225E 12 | .132E 12 |
| 401.- 500. | .265E 13 | .209E 13 | .126E 13 | .329E 12 | .312E 12 | .286E 12 |
| 501.- 600. | .290E 13 | .234E 13 | .964E 12 | .631E 12 | .599E 12 | .340E 12 |
| 601.- 700. | .626E 12 | .513E 12 | .240E 12 | .175E 12 | .166E 12 | .107E 12 |
| 701.- 800. | .705E 12 | .581E 12 | .393E 12 | .216E 12 | .206E 12 | .188E 12 |
| 801.- 900. | .657E 12 | .549E 12 | .386E 12 | .245E 12 | .233E 12 | .213E 12 |
| 901.-1000. | .227E 12 | .192E 12 | .0 | .935E 11 | .890E 11 | .0 |
| 1001.-1100. | .216E 12 | .184E 12 | .134E 12 | .955E 11 | .909E 11 | .828E 11 |
| 1101.-1200. | .256E 12 | .219E 12 | .0 | .121E 12 | .115E 12 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .115E 10 | .101E 10 | .780E 09 | .668E 09 | .635E 09 | .563E 09 |
| 1601.-1700. | .330E 12 | .289E 12 | .0 | .197E 12 | .187E 12 | .0 |
| 1701.-1800. | .205E 13 | .180E 13 | .427E 10 | .125E 13 | .119E 13 | .307E 10 |
| 1801.-1900. | .225E 13 | .198E 13 | .0 | .140E 13 | .133E 13 | .0 |
| 1901.-2000. | .178E 14 | .157E 14 | .252E 11 | .114E 14 | .108E 14 | .180E 11 |
| 2001.-2100. | .248E 13 | .220E 13 | .0 | .165E 13 | .155E 13 | .0 |
| 2101.-2200. | .244E 13 | .216E 13 | .0 | .165E 13 | .153E 13 | .0 |
| 2201.-2300. | .855E 12 | .760E 12 | .0 | .594E 12 | .546E 12 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .469E 12 | .418E 12 | .0 | .341E 12 | .307E 12 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .465E 14 | .394E 14 | .629E 13 | .207E 14 | .195E 14 | .137E 13 |

SCC = 30500304--BRICK MANUF CURING GAS FIRED -TOTAL SCC -TOT RECS = 261

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 14 | .764E 11 | .574E 11 | .291E 11 | .0 | .0 | .0 |
| 24 | .118E 12 | .882E 11 | .0 | .0 | .0 | .0 |
| 32 | .460E 14 | .391E 14 | .622E 13 | .206E 14 | .195E 14 | .136E 13 |
| 99 | .267E 12 | .217E 12 | .401E 11 | .646E 11 | .614E 11 | .108E 11 |
| | .465E 14 | .394E 14 | .629E 13 | .207E 14 | .195E 14 | .137E 13 |

CC 30500304--BRICK MANUF CURING GAS FIRED --TOTAL SCC -SIC = 0 -TOT RECS = 261

```
EMP RANGE    COUNT

                         ----------------------------------------------------------------------------------------------------
   0.- 100.  .287E 12   !HH
 101.- 200.  .119E 13   !HHHHHHHHHHH
 201.- 300.  .290E 13   !HHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 301.- 400.  .305E 13   !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 401.- 500.  .209E 13   !HHHHHHHHHHHHHHHHHHHH
 501.- 600.  .234E 13   !HHHHHHHHHHHHHHHHHHHHHHH
 601.- 700.  .513E 12   !HHHHH
 701.- 800.  .581E 12   !HHHHH
 801.- 900.  .549E 12   !HHHHH
 901.-1000.  .192E 12   !H
1001.-1100.  .184E 12   !H
1101.-1200.  .219E 12   !HH
1201.-1300.  .0         !
1301.-1400.  .0         !
1401.-1500.  .0         !
1501.-1600.  .101E 10   !H
1601.-1700.  .289E 12   !HH
1701.-1800.  .180E 13   !HHHHHHHHHHHHHHHHHH
1801.-1900.  .198E 13   !HHHHHHHHHHHHHHHHHHH
1901.-2000.  .157E 14   !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
2001.-2100.  .220E 13   !HHHHHHHHHHHHHHHHHHHHHH
2101.-2200.  .216E 13   !HHHHHHHHHHHHHHHHHHHHH
2201.-2300.  .760E 12   !HHHHHHH
2301.-2400.  .0         !
2401.-2500.  .418E 12   !HHHH
2501.-2600.  .0         !
2601.-2700.  .0         !
2701.-2800.  .0         !
2801.-2900.  .0         !
2901.-3000.  .0         !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500305--BRICK MANUF CURING OIL FIRED -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 24

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .762E 10 | .715E 10 | .324E 09 | .0 | .0 | .0 |
| 101.- 200. | .356E 10 | .309E 10 | .152E 10 | .0 | .0 | .0 |
| 201.- 300. | .139E 12 | .107E 12 | .585E 11 | .0 | .0 | .0 |
| 301.- 400. | .482E 12 | .373E 12 | .653E 11 | .204E 11 | .194E 11 | .547E 10 |
| 401.- 500. | .996E 11 | .790E 11 | .219E 11 | .144E 11 | .137E 11 | .538E 10 |
| 501.- 600. | .373E 11 | .299E 11 | .189E 11 | .717E 10 | .680E 10 | .623E 10 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .128E 12 | .106E 12 | .730E 11 | .425E 11 | .404E 11 | .369E 11 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .897E 12 | .705E 12 | .239E 12 | .845E 11 | .803E 11 | .540E 11 |

SCC = 30500305--BRICK MANUF CURING OIL FIRED -NO CONTROL EQUIPMENT -TOT RECS = 24

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 14 | .168E 11 | .131E 11 | .765E 10 | .125E 10 | .119E 10 | .109E 10 |
| 32 | .880E 12 | .692E 12 | .232E 12 | .832E 11 | .791E 11 | .529E 11 |
| | .897E 12 | .705E 12 | .239E 12 | .845E 11 | .803E 11 | .540E 11 |

CC = 30500305--BRICK MANUF CURING OIL FIRED -- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 24

```
TEMP RANGE    COUNT
                      ------------------------------------------------------------------------------------------------------
   0.- 100.   .715E 10  !H
 101.- 200.   .309E 10  !H
 201.- 300.   .107E 12  !H
 301.- 400.   .373E 12  !HHH
 401.- 500.   .790E 11  !H
 501.- 600.   .299E 11  !H
 601.- 700.   .0        !
 701.- 800.   .106E 12  !H
 801.- 900.   .0        !
 901.-1000.   .0        !
1001.-1100.   .0        !
1101.-1200.   .0        !
1201.-1300.   .0        !
1301.-1400.   .0        !
1401.-1500.   .0        !
1501.-1600.   .0        !
1601.-1700.   .0        !
1701.-1800.   .0        !
1801.-1900.   .0        !
1901.-2000.   .0        !
2001.-2100.   .0        !
2101.-2200.   .0        !
2201.-2300.   .0        !
2301.-2400.   .0        !
2401.-2500.   .0        !
2501.-2600.   .0        !
2601.-2700.   .0        !
2701.-2800.   .0        !
2801.-2900.   .0        !
2901.-3000.   .0        !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500305--BRICK MANUF CURING OIL FIRED -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 3

| | | | | | | |
|---|---|---|---|---|---|---|
| TEMP | MAXIMUM | EXPECTED | MINIMUM | MAXIMUM | EXPECTED | MINIMUM |
| | 60 DEG | 60 DEG | 60 DEG | 300 DEG | 300 DEG | 300 DEG |

0 RECORDS FOR THIS SECTION OF SCC

SCC = 30500305--BRICK MANUF CURING OIL FIRED -WITH CONTROL EQUIPMENT -TOT RECS = 3

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| TEMP OUTSIDE | CURVES | 50.0 | | | | |
| TEMP OUTSIDE | CURVES | 50.0 | | | | |
| TEMP OUTSIDE | CURVES | 50.0 | | | | |

SCC= 30500306--BRICK MANUF CURING COAL FIRED -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 19

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .211E 11 | .198E 11 | .0 | .0 | .0 | .0 |
| 101.- 200. | .119E 12 | .885E 11 | .0 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .606E 12 | .469E 12 | .228E 11 | .238E 11 | .226E 11 | .296E 10 |
| 401.- 500. | .177E 13 | .139E 13 | .835E 12 | .200E 12 | .190E 12 | .173E 12 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .126E 11 | .111E 11 | .875E 10 | .779E 10 | .739E 10 | .628E 10 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .253E 13 | .198E 13 | .866E 12 | .231E 12 | .219E 12 | .183E 12 |

```
SCC = 30500306--BRICK MANUF CURING COAL FIRED    -NO CONTROL EQUIPMENT -TOT RECS =     19
SIC          MAXIMUM     EXPECTED     MINIMUM      MAXIMUM     EXPECTED     MINIMUM
             60 DEG      60 DEG       60 DEG       300 DEG     300 DEG      300 DEG
   32       .253E 13    .198E 13     .866E 12     .231E 12    .219E 12     .183E 12

            .253E 13    .198E 13     .866E 12     .231E 12    .219E 12     .183E 12

CC = 30500306--BRICK MANUF  CURING COAL FIRED   --  -NO CONTROL EQUIPMENT  -SIC=    0 -TOTAL RECS =     19
TEMP RANGE   COUNT

                        ----------------------------------------------------------------------------------------------------
    0.- 100.  .198E 11  !H
  101.- 200.  .885E 11  !H
  201.- 300.  .0        !
  301.- 400.  .469E 12  !HHHH
  401.- 500.  .139E 13  !HHHHHHHHHHHHHH
  501.- 600.  .0        !
  601.- 700.  .0        !
  701.- 800.  .0        !
  801.- 900.  .0        !
  901.-1000.  .0        !
 1001.-1100.  .0        !
 1101.-1200.  .0        !
 1201.-1300.  .0        !
 1301.-1400.  .0        !
 1401.-1500.  .0        !
 1501.-1600.  .0        !
 1601.-1700.  .0        !
 1701.-1800.  .111E 11  !H
 1801.-1900.  .0        !
 1901.-2000.  .0        !
 2001.-2100.  .0        !
 2101.-2200.  .0        !
 2201.-2300.  .0        !
 2301.-2400.  .0        !
 2401.-2500.  .0        !
 2501.-2600.  .0        !
 2601.-2700.  .0        !
 2701.-2800.  .0        !
 2801.-2900.  .0        !
 2901.-3000.  .0        !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500306--BRICK MANUF CURING COAL FIRED -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 1

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .161E 12 | .128E 12 | .786E 11 | .244E 11 | .232E 11 | .212E 11 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .161E 12 | .128E 12 | .786E 11 | .244E 11 | .232E 11 | .212E 11 |

SCC = 30500306--BRICK MANUF CURING COAL FIRED -WITH CONTROL EQUIPMENT -TOT RECS = 1

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .161E 12 | .128E 12 | .786E 11 | .244E 11 | .232E 11 | .212E 11 |
| | .161E 12 | .128E 12 | .786E 11 | .244E 11 | .232E 11 | .212E 11 |

CC =30500306--BRICK MANUF CURING COAL FIRED ---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 1

```
TEMP RANGE   COUNT

                         ------------------------------------------------------------------------------------------------------
    0.- 100.  .0         !
  101.- 200.  .0         !
  201.- 300.  .0         !
  301.- 400.  .0         !
  401.- 500.  .128E 12   !H
  501.- 600.  .0         !
  601.- 700.  .0         !
  701.- 800.  .0         !
  801.- 900.  .0         !
  901.-1000.  .0         !
 1001.-1100.  .0         !
 1101.-1200.  .0         !
 1201.-1300.  .0         !
 1301.-1400.  .0         !
 1401.-1500.  .0         !
 1501.-1600.  .0         !
 1601.-1700.  .0         !
 1701.-1800.  .0         !
 1801.-1900.  .0         !
 1901.-2000.  .0         !
 2001.-2100.  .0         !
 2101.-2200.  .0         !
 2201.-2300.  .0         !
 2301.-2400.  .0         !
 2401.-2500.  .0         !
 2501.-2600.  .0         !
 2601.-2700.  .0         !
 2701.-2800.  .0         !
 2801.-2900.  .0         !
 2901.-3000.  .0         !
                         0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500306--BRICK MANUF CURING COAL FIRED -TOTAL SCC -SIC = 0 -TOT RECS = 20

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .211E 11 | .198E 11 | .0 | .0 | .0 | .0 |
| 101.- 200. | .119E 12 | .885E 11 | .0 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .606E 12 | .469E 12 | .228E 11 | .238E 11 | .226E 11 | .296E 10 |
| 401.- 500. | .193E 13 | .152E 13 | .913E 12 | .224E 12 | .213E 12 | .195E 12 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .126E 11 | .111E 11 | .875E 10 | .779E 10 | .739E 10 | .628E 10 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .269E 13 | .211E 13 | .945E 12 | .256E 12 | .243E 12 | .204E 12 |

SCC = 30500306--BRICK MANUF CURING COAL FIRED -TOTAL SCC -TOT RECS = 20

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .269E 13 | .211E 13 | .945E 12 | .256E 12 | .243E 12 | .204E 12 |
| | .269E 13 | .211E 13 | .945E 12 | .256E 12 | .243E 12 | .204E 12 |

CC 30500306--BRICK MANUF CURING COAL FIRED --TOTAL SCC -SIC = 0 -TOT RECS = 20

```
EMP RANGE    COUNT

                       ------------------------------------------------------------------------------------------------------
   0.- 100.  .198E 11  !H
 101.- 200.  .885E 11  !H
 201.- 300.  .0        !
 301.- 400.  .469E 12  !HHHH
 401.- 500.  .152E 13  !HHHHHHHHHHHHHHH
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .111E 11  !H
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500399--BRICK MANUF OTHER/NOT CLASSIFIED -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 88

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .151E 13 | .141E 13 | .156E 12 | .0 | .0 | .0 |
| 101.- 200. | .347E 13 | .263E 13 | .126E 13 | .0 | .0 | .0 |
| 201.- 300. | .176E 12 | .133E 12 | .707E 11 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .153E 12 | .121E 12 | .734E 11 | .202E 11 | .192E 11 | .176E 11 |
| 501.- 600. | .953E 12 | .772E 12 | .500E 12 | .221E 12 | .210E 12 | .192E 12 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .188E 10 | .164E 10 | .127E 10 | .109E 10 | .104E 10 | .919E 09 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .626E 13 | .508E 13 | .206E 13 | .242E 12 | .230E 12 | .210E 12 |

SCC = 30500399--BRICK MANUF OTHER/NOT CLASSIFIED -NO CONTROL EQUIPMENT -TOT RECS = 88

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 29 | .266E 12 | .250E 12 | .0 | .0 | .0 | .0 |
| 32 | .580E 13 | .465E 13 | .195E 13 | .230E 12 | .219E 12 | .200E 12 |
| 99 | .199E 12 | .172E 12 | .110E 12 | .116E 11 | .110E 11 | .101E 11 |
| | .626E 13 | .508E 13 | .206E 13 | .242E 12 | .230E 12 | .210E 12 |

CC = 30500399--BRICK MANUF OTHER/NOT CLASSIFIED-- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 88

```
TEMP RANGE   COUNT
                      ------------------------------------------------------------------------------------------------------------
   0.- 100.  .141E 13 !HHHHHHHHHHHHHHH
 101.- 200.  .263E 13 !HHHHHHHHHHHHHHHHHHHHHHHHHHHH
 201.- 300.  .133E 12 !H
 301.- 400.  .0       !
 401.- 500.  .121E 12 !H
 501.- 600.  .772E 12 !HHHHHHHH
 601.- 700.  .0       !
 701.- 800.  .0       !
 801.- 900.  .0       !
 901.-1000.  .0       !
1001.-1100.  .0       !
1101.-1200.  .0       !
1201.-1300.  .0       !
1301.-1400.  .0       !
1401.-1500.  .0       !
1501.-1600.  .164E 10 !H
1601.-1700.  .0       !
1701.-1800.  .0       !
1801.-1900.  .0       !
1901.-2000.  .0       !
2001.-2100.  .0       !
2101.-2200.  .0       !
2201.-2300.  .0       !
2301.-2400.  .0       !
2401.-2500.  .0       !
2501.-2600.  .0       !
2601.-2700.  .0       !
2701.-2800.  .0       !
2801.-2900.  .0       !
2901.-3000.  .0       !
                      0--------10--------20--------30--------40--------50--------60--------70--------80--------90--------100
```

SCC= 30500399--BRICK MANUF OTHER/NOT CLASSIFIED -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 65

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .283E 12 | .265E 12 | .779E 11 | .0 | .0 | .0 |
| 101.- 200. | .506E 11 | .381E 11 | .187E 11 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .132E 12 | .102E 12 | .576E 11 | .484E 10 | .460E 10 | .421E 10 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .525E 11 | .425E 11 | .0 | .122E 11 | .116E 11 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .518E 12 | .448E 12 | .154E 12 | .171E 11 | .162E 11 | .421E 10 |

SCC = 30500399--BRICK MANUF OTHER/NOT CLASSIFIED -WITH CONTROL EQUIPMENT -TOT RECS = 65

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 29 | .229E 11 | .215E 11 | .0 | .0 | .0 | .0 |
| 32 | .307E 12 | .279E 12 | .941E 11 | .0 | .0 | .0 |
| 36 | .331E 10 | .311E 10 | .253E 10 | .0 | .0 | .0 |
| 99 | .184E 12 | .144E 12 | .576E 11 | .171E 11 | .162E 11 | .421E 10 |
| | .518E 12 | .448E 12 | .154E 12 | .171E 11 | .162E 11 | .421E 10 |

CC =30500399--BRICK MANUF OTHER/NOT CLASSIFIED---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 65

```
TEMP RANGE   COUNT
                      ----------------------------------------------------------------------------------------------------
   0.- 100.  .265E 12 !HH
 101.- 200.  .381E 11 !H
 201.- 300.  .0       !
 301.- 400.  .102E 12 !H
 401.- 500.  .0       !
 501.- 600.  .425E 11 !H
 601.- 700.  .0       !
 701.- 800.  .0       !
 801.- 900.  .0       !
 901.-1000.  .0       !
1001.-1100.  .0       !
1101.-1200.  .0       !
1201.-1300.  .0       !
1301.-1400.  .0       !
1401.-1500.  .0       !
1501.-1600.  .0       !
1601.-1700.  .0       !
1701.-1800.  .0       !
1801.-1900.  .0       !
1901.-2000.  .0       !
2001.-2100.  .0       !
2101.-2200.  .0       !
2201.-2300.  .0       !
2301.-2400.  .0       !
2401.-2500.  .0       !
2501.-2600.  .0       !
2601.-2700.  .0       !
2701.-2800.  .0       !
2801.-2900.  .0       !
2901.-3000.  .0       !
                      0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500399--BRICK MANUF OTHER/NOT CLASSIFIED -TOTAL SCC -SIC = 0 -TOT RECS = 153

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .179E 13 | .168E 13 | .234E 12 | .0 | .0 | .0 |
| 101.- 200. | .352E 13 | .267E 13 | .127E 13 | .0 | .0 | .0 |
| 201.- 300. | .176E 12 | .133E 12 | .707E 11 | .0 | .0 | .0 |
| 301.- 400. | .132E 12 | .102E 12 | .576E 11 | .484E 10 | .460E 10 | .421E 10 |
| 401.- 500. | .153E 12 | .121E 12 | .734E 11 | .202E 11 | .192E 11 | .176E 11 |
| 501.- 600. | .101E 13 | .814E 12 | .500E 12 | .233E 12 | .221E 12 | .192E 12 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .188E 10 | .164E 10 | .127E 10 | .109E 10 | .104E 10 | .919E 09 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .678E 13 | .552E 13 | .221E 13 | .259E 12 | .246E 12 | .214E 12 |

SCC = 30500399--BRICK MANUF OTHER/NOT CLASSIFIED -TOTAL SCC -TOT RECS = 153

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 29 | .289E 12 | .271E 12 | .0 | .0 | .0 | .0 |
| 32 | .610E 13 | .493E 13 | .204E 13 | .230E 12 | .219E 12 | .200E 12 |
| 36 | .331E 10 | .311E 10 | .253E 10 | .0 | .0 | .0 |
| 99 | .384E 12 | .317E 12 | .167E 12 | .287E 11 | .273E 11 | .143E 11 |
| | .678E 13 | .552E 13 | .221E 13 | .259E 12 | .246E 12 | .214E 12 |

CC 30500399--BRICK MANUF OTHER/NOT CLASSIFIED--TOTAL SCC -SIC = 0 -TOT RECS = 153

```
EMP RANGE      COUNT

   0.- 100.   .168E 13   --------------------------------------------------------------------------------------------
 101.- 200.   .267E 13   !HHHHHHHHHHHHHHHH
 201.- 300.   .133E 12   !HHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 301.- 400.   .102E 12   !H
 401.- 500.   .121E 12   !H
 501.- 600.   .814E 12   !H
 601.- 700.   .0         !HHHHHHHH
 701.- 800.   .0         !
 801.- 900.   .0         !
 901.-1000.   .0         !
1001.-1100.   .0         !
1101.-1200.   .0         !
1201.-1300.   .0         !
1301.-1400.   .0         !
1401.-1500.   .0         !
1501.-1600.   .164E 10   !
1601.-1700.   .0         !H
1701.-1800.   .0         !
1801.-1900.   .0         !
1901.-2000.   .0         !
2001.-2100.   .0         !
2101.-2200.   .0         !
2201.-2300.   .0         !
2301.-2400.   .0         !
2401.-2500.   .0         !
2501.-2600.   .0         !
2601.-2700.   .0         !
2701.-2800.   .0         !
2801.-2900.   .0         !
2901.-3000.   .0         !
                         !
                         0-------10-------20-------30-------40-------50-------60-------70-------80-------90-------100
```

SCC= 30500401--CALCIUM CARB ELECTRIC FURNACE -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 2

| | | | | | | |
|---|---|---|---|---|---|---|
| TEMP | MAXIMUM | EXPECTED | MINIMUM | MAXIMUM | EXPECTED | MINIMUM |
| | 60 DEG | 60 DEG | 60 DEG | 300 DEG | 300 DEG | 300 DEG |

0 RECORDS FOR THIS SECTION OF SCC

SCC = 30500401--CALCIUM CARBELECTRIC FURNACE -NO CONTROL EQUIPMENT -TOT RECS = 2

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|

SCC= 30500401--CALCIUM CARB ELECTRIC FURNACE -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 3

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .219E 12 | .166E 12 | .872E 11 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .401E 12 | .316E 12 | .189E 12 | .451E 11 | .429E 11 | .392E 11 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .620E 12 | .482E 12 | .276E 12 | .451E 11 | .429E 11 | .392E 11 |

```
SCC = 30500401--CALCIUM CARBELECTRIC FURNACE     -WITH CONTROL EQUIPMENT -TOT RECS =      3
SIC           MAXIMUM    EXPECTED    MINIMUM     MAXIMUM     EXPECTED    MINIMUM
              60 DEG     60 DEG       60 DEG      300DEG     300 DEG     300 DEG
   28        .610E 12   .474E 12    .272E 12    .451E 11    .429E 11    .392E 11
   29        .981E 10   .752E 10    .413E 10    .0          .0          .0

             .620E 12   .482E 12    .276E 12    .451E 11    .429E 11    .392E 11

CC =30500401--CALCIUM CARB ELECTRIC FURNACE    ---WITH CONTROL EQUIPMENT  -SIC=    0 -TOTAL RECS =      3
TEMP RANGE    COUNT
                          ------------------------------------------------------------------------------------------
    0.- 100.  .0        !
  101.- 200.  .0        !
  201.- 300.  .166E 12  !H
  301.- 400.  .0        !
  401.- 500.  .316E 12  !HHH
  501.- 600.  .0        !
  601.- 700.  .0        !
  701.- 800.  .0        !
  801.- 900.  .0        !
  901.-1000.  .0        !
 1001.-1100.  .0        !
 1101.-1200.  .0        !
 1201.-1300.  .0        !
 1301.-1400.  .0        !
 1401.-1500.  .0        !
 1501.-1600.  .0        !
 1601.-1700.  .0        !
 1701.-1800.  .0        !
 1801.-1900.  .0        !
 1901.-2000.  .0        !
 2001.-2100.  .0        !
 2101.-2200.  .0        !
 2201.-2300.  .0        !
 2301.-2400.  .0        !
 2401.-2500.  .0        !
 2501.-2600.  .0        !
 2601.-2700.  .0        !
 2701.-2800.  .0        !
 2801.-2900.  .0        !
 2901.-3000.  .0        !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500402--CALCIUM CARB COKE DRIER -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 1

| | | | | | | |
|---|---|---|---|---|---|---|
| TEMP | MAXIMUM | EXPECTED | MINIMUM | MAXIMUM | EXPECTED | MINIMUM |
| | 60 DEG | 60 DEG | 60 DEG | 300 DEG | 300 DEG | 300 DEG |

0 RECORDS FOR THIS SECTION OF SCC

SCC = 30500402--CALCIUM CARBCOKE DRIER -NO CONTROL EQUIPMENT -TOT RECS = 1

| SIC | MAXIMUM | EXPECTED | MINIMUM | MAXIMUM | EXPECTED | MINIMUM |
|---|---|---|---|---|---|---|
| | 60 DEG | 60 DEG | 60 DEG | 300 DEG | 300 DEG | 300 DEG |

SCC= 30500402--CALCIUM CARB COKE DRIER -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 3

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .160E 11 | .150E 11 | .738E 10 | .0 | .0 | .0 |
| 201.- 300. | .892E 11 | .671E 11 | .341E 11 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .105E 12 | .821E 11 | .415E 11 | .0 | .0 | .0 |

SCC = 30500402--CALCIUM CARBCOKE DRIER -WITH CONTROL EQUIPMENT -TOT RECS = 3

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 28 | .105E 12 | .821E 11 | .415E 11 | .0 | .0 | .0 |
| | .105E 12 | .821E 11 | .415E 11 | .0 | .0 | .0 |

CC =30500402--CALCIUM CARB COKE DRIER ---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 3

```
TEMP RANGE   COUNT

                         -----------------------------------------------------------------------------------------------------
   0.- 100.  .0         !
 101.- 200.  .150E 11   !H
 201.- 300.  .671E 11   !H
 301.- 400.  .0         !
 401.- 500.  .0         !
 501.- 600.  .0         !
 601.- 700.  .0         !
 701.- 800.  .0         !
 801.- 900.  .0         !
 901.-1000.  .0         !
1001.-1100.  .0         !
1101.-1200.  .0         !
1201.-1300.  .0         !
1301.-1400.  .0         !
1401.-1500.  .0         !
1501.-1600.  .0         !
1601.-1700.  .0         !
1701.-1800.  .0         !
1801.-1900.  .0         !
1901.-2000.  .0         !
2001.-2100.  .0         !
2101.-2200.  .0         !
2201.-2300.  .0         !
2301.-2400.  .0         !
2401.-2500.  .0         !
2501.-2600.  .0         !
2601.-2700.  .0         !
2701.-2800.  .0         !
2801.-2900.  .0         !
2901.-3000.  .0         !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500403--CALCIUM CARB FURNACE ROOM VENTS -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 2

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .679E 12 | .637E 12 | .350E 12 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .679E 12 | .637E 12 | .350E 12 | .0 | .0 | .0 |

SCC = 30500403--CALCIUM CARBFURNACE ROOM VENTS -NO CONTROL EQUIPMENT -TOT RECS = 2

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 28 | .458E 12 | .430E 12 | .350E 12 | .0 | .0 | .0 |
| 29 | .221E 12 | .207E 12 | .0 | .0 | .0 | .0 |
| | .679E 12 | .637E 12 | .350E 12 | .0 | .0 | .0 |

CC = 30500403--CALCIUM CARB FURNACE ROOM VENTS -- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 2

```
TEMP RANGE   COUNT
                      ---------------------------------------------------------------------------------------------
   0.- 100.  .637E 12 !HHHHHH
 101.- 200.  .0       !
 201.- 300.  .0       !
 301.- 400.  .0       !
 401.- 500.  .0       !
 501.- 600.  .0       !
 601.- 700.  .0       !
 701.- 800.  .0       !
 801.- 900.  .0       !
 901.-1000.  .0       !
1001.-1100.  .0       !
1101.-1200.  .0       !
1201.-1300.  .0       !
1301.-1400.  .0       !
1401.-1500.  .0       !
1501.-1600.  .0       !
1601.-1700.  .0       !
1701.-1800.  .0       !
1801.-1900.  .0       !
1901.-2000.  .0       !
2001.-2100.  .0       !
2101.-2200.  .0       !
2201.-2300.  .0       !
2301.-2400.  .0       !
2401.-2500.  .0       !
2501.-2600.  .0       !
2601.-2700.  .0       !
2701.-2800.  .0       !
2801.-2900.  .0       !
2901.-3000.  .0       !
                      0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500403--CALCIUM CARB FURNACE ROOM VENTS -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 1

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .242E 12 | .183E 12 | .960E 11 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .242E 12 | .183E 12 | .960E 11 | .0 | .0 | .0 |

SCC = 30500403--CALCIUM CARBFURNACE ROOM VENTS -WITH CONTROL EQUIPMENT -TOT RECS = 1

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 99 | .242E 12 | .183E 12 | .960E 11 | .0 | .0 | .0 |
| | .242E 12 | .183E 12 | .960E 11 | .0 | .0 | .0 |

CC =30500403--CALCIUM CARB FURNACE ROOM VENTS ---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 1

| TEMP RANGE | COUNT |
|---|---|
| 0.- 100. | .0 |
| 101.- 200. | .0 |
| 201.- 300. | .183E 12 |
| 301.- 400. | .0 |
| 401.- 500. | .0 |
| 501.- 600. | .0 |
| 601.- 700. | .0 |
| 701.- 800. | .0 |
| 801.- 900. | .0 |
| 901.-1000. | .0 |
| 1001.-1100. | .0 |
| 1101.-1200. | .0 |
| 1201.-1300. | .0 |
| 1301.-1400. | .0 |
| 1401.-1500. | .0 |
| 1501.-1600. | .0 |
| 1601.-1700. | .0 |
| 1701.-1800. | .0 |
| 1801.-1900. | .0 |
| 1901.-2000. | .0 |
| 2001.-2100. | .0 |
| 2101.-2200. | .0 |
| 2201.-2300. | .0 |
| 2301.-2400. | .0 |
| 2401.-2500. | .0 |
| 2501.-2600. | .0 |
| 2601.-2700. | .0 |
| 2701.-2800. | .0 |
| 2801.-2900. | .0 |
| 2901.-3000. | .0 |

SCC= 30500403--CALCIUM CARB FURNACE ROOM VENTS -TOTAL SCC -SIC = 0 -TOT RECS = 3

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .679E 12 | .637E 12 | .350E 12 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .242E 12 | .183E 12 | .960E 11 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .921E 12 | .820E 12 | .446E 12 | .0 | .0 | .0 |

SCC = 30500403--CALCIUM CARBFURNACE ROOM VENTS -TOTAL SCC -TOT RECS = 3

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 28 | .458E 12 | .430E 12 | .350E 12 | .0 | .0 | .0 |
| 29 | .221E 12 | .207E 12 | .0 | .0 | .0 | .0 |
| 99 | .242E 12 | .183E 12 | .960E 11 | .0 | .0 | .0 |
| | .921E 12 | .820E 12 | .446E 12 | .0 | .0 | .0 |

CC 30500403--CALCIUM CARB FURNACE ROOM VENTS --TOTAL SCC -SIC = 0 -TOT RECS = 3

```
EMP RANGE    COUNT
                        ------------------------------------------------------------------------------------------------
   0.- 100.  .637E 12  !HHHHHH
 101.- 200.  .0        !
 201.- 300.  .183E 12  !H
 301.- 400.  .0        !
 401.- 500.  .0        !
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500499--CALCIUM CARB OTHER/NOT CLASSIFIED -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 2

| | MAXIMUM | EXPECTED | MINIMUM | MAXIMUM | EXPECTED | MINIMUM |
|---|---|---|---|---|---|---|
| TEMP | 60 DEG | 60 DEG | 60 DEG | 300 DEG | 300 DEG | 300 DEG |

0 RECORDS FOR THIS SECTION OF SCC

SCC = 30500499--CALCIUM CARBOTHER/NOT CLASSIFIED -NO CONTROL EQUIPMENT -TOT RECS = 2

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|

SCC= 30500499--CALCIUM CARB OTHER/NOT CLASSIFIED -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 11

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .290E 11 | .272E 11 | .221E 11 | .0 | .0 | .0 |
| 101.- 200. | .761E 11 | .568E 11 | .281E 11 | .0 | .0 | .0 |
| 201.- 300. | .881E 11 | .672E 11 | .0 | .0 | .0 | .0 |
| 301.- 400. | .353E 11 | .273E 11 | .154E 11 | .130E 10 | .123E 10 | .113E 10 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .228E 12 | .178E 12 | .657E 11 | .130E 10 | .123E 10 | .113E 10 |

SCC = 30500499--CALCIUM CARBOTHER/NOT CLASSIFIED -WITH CONTROL EQUIPMENT -TOT RECS = 11

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 28 | .228E 12 | .178E 12 | .657E 11 | .130E 10 | .123E 10 | .113E 10 |
| | .228E 12 | .178E 12 | .657E 11 | .130E 10 | .123E 10 | .113E 10 |

CC =30500499--CALCIUM CARB OTHER/NOT CLASSIFIED---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 11

```
TEMP RANGE   COUNT

               -------------------------------------------------------------------------------------------------------
   0.- 100.  .272E 11  !H
 101.- 200.  .568E 11  !H
 201.- 300.  .672E 11  !H
 301.- 400.  .273E 11  !H
 401.- 500.  .0        !
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500501--CASTABLE REF RAW MATERIAL DRIER -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 7

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .292E 11 | .273E 11 | .0 | .0 | .0 | .0 |
| 101.- 200. | .238E 12 | .178E 12 | .389E 11 | .0 | .0 | .0 |
| 201.- 300. | .169E 12 | .128E 12 | .396E 11 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .436E 12 | .333E 12 | .785E 11 | .0 | .0 | .0 |

SCC = 30500501--CASTABLE REFRAW MATERIAL DRIER -NO CONTROL EQUIPMENT -TOT RECS = 7

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 14 | .958E 11 | .771E 11 | .0 | .0 | .0 | .0 |
| 32 | .341E 12 | .256E 12 | .785E 11 | .0 | .0 | .0 |
| | .436E 12 | .333E 12 | .785E 11 | .0 | .0 | .0 |

CC = 30500501--CASTABLE REF RAW MATERIAL DRIER -- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 7

| TEMP RANGE | COUNT | |
|---|---|---|
| 0.- 100. | .273E 11 | !H |
| 101.- 200. | .178E 12 | !H |
| 201.- 300. | .128E 12 | !H |
| 301.- 400. | .0 | ! |
| 401.- 500. | .0 | ! |
| 501.- 600. | .0 | ! |
| 601.- 700. | .0 | ! |
| 701.- 800. | .0 | ! |
| 801.- 900. | .0 | ! |
| 901.-1000. | .0 | ! |
| 1001.-1100. | .0 | ! |
| 1101.-1200. | .0 | ! |
| 1201.-1300. | .0 | ! |
| 1301.-1400. | .0 | ! |
| 1401.-1500. | .0 | ! |
| 1501.-1600. | .0 | ! |
| 1601.-1700. | .0 | ! |
| 1701.-1800. | .0 | ! |
| 1801.-1900. | .0 | ! |
| 1901.-2000. | .0 | ! |
| 2001.-2100. | .0 | ! |
| 2101.-2200. | .0 | ! |
| 2201.-2300. | .0 | ! |
| 2301.-2400. | .0 | ! |
| 2401.-2500. | .0 | ! |
| 2501.-2600. | .0 | ! |
| 2601.-2700. | .0 | ! |
| 2701.-2800. | .0 | ! |
| 2801.-2900. | .0 | ! |
| 2901.-3000. | .0 | ! |

0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100

SCC= 30500501--CASTABLE REF RAW MATERIAL DRIER -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 21

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .943E 11 | .884E 11 | .720E 11 | .0 | .0 | .0 |
| 101.- 200. | .493E 12 | .377E 12 | .629E 11 | .0 | .0 | .0 |
| 201.- 300. | .104E 12 | .789E 11 | .414E 11 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .799E 11 | .635E 11 | .390E 11 | .121E 11 | .115E 11 | .105E 11 |
| 501.- 600. | .286E 12 | .232E 12 | .150E 12 | .667E 11 | .633E 11 | .579E 11 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .106E 13 | .839E 12 | .365E 12 | .788E 11 | .748E 11 | .685E 11 |

SCC = 30500501--CASTABLE REFRAW MATERIAL DRIER -WITH CONTROL EQUIPMENT -TOT RECS = 21

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 28 | .418E 11 | .320E 11 | .176E 11 | .0 | .0 | .0 |
| 29 | .111E 12 | .835E 11 | .0 | .0 | .0 | .0 |
| 32 | .793E 12 | .640E 12 | .348E 12 | .788E 11 | .748E 11 | .685E 11 |
| 99 | .111E 12 | .835E 11 | .0 | .0 | .0 | .0 |
| | .106E 13 | .839E 12 | .365E 12 | .788E 11 | .748E 11 | .685E 11 |

CC =30500501--CASTABLE REF RAW MATERIAL DRIER ---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 21

```
TEMP RANGE      COUNT
                         ------------------------------------------------------------------------------------------------------
   0.- 100.   .884E 11  !H
 101.- 200.   .377E 12  !HHH
 201.- 300.   .789E 11  !H
 301.- 400.   .0        !
 401.- 500.   .635E 11  !H
 501.- 600.   .232E 12  !HH
 601.- 700.   .0        !
 701.- 800.   .0        !
 801.- 900.   .0        !
 901.-1000.   .0        !
1001.-1100.   .0        !
1101.-1200.   .0        !
1201.-1300.   .0        !
1301.-1400.   .0        !
1401.-1500.   .0        !
1501.-1600.   .0        !
1601.-1700.   .0        !
1701.-1800.   .0        !
1801.-1900.   .0        !
1901.-2000.   .0        !
2001.-2100.   .0        !
2101.-2200.   .0        !
2201.-2300.   .0        !
2301.-2400.   .0        !
2401.-2500.   .0        !
2501.-2600.   .0        !
2601.-2700.   .0        !
2701.-2800.   .0        !
2801.-2900.   .0        !
2901.-3000.   .0        !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500501--CASTABLE REF RAW MATERIAL DRIER -TOTAL SCC -SIC = 0 -TOT RECS = 28

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .123E 12 | .116E 12 | .720E 11 | .0 | .0 | .0 |
| 101.- 200. | .731E 12 | .555E 12 | .102E 12 | .0 | .0 | .0 |
| 201.- 300. | .273E 12 | .206E 12 | .810E 11 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .799E 11 | .635E 11 | .390E 11 | .121E 11 | .115E 11 | .105E 11 |
| 501.- 600. | .286E 12 | .232E 12 | .150E 12 | .667E 11 | .633E 11 | .579E 11 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .149E 13 | .117E 13 | .444E 12 | .788E 11 | .748E 11 | .685E 11 |

SCC = 30500501--CASTABLE REFRAW MATERIAL DRIER -TOTAL SCC -TOT RECS = 28

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 14 | .958E 11 | .771E 11 | .0 | .0 | .0 | .0 |
| 28 | .418E 11 | .320E 11 | .176E 11 | .0 | .0 | .0 |
| 29 | .111E 12 | .835E 11 | .0 | .0 | .0 | .0 |
| 32 | .113E 13 | .896E 12 | .426E 12 | .788E 11 | .748E 11 | .685E 11 |
| 99 | .111E 12 | .835E 11 | .0 | .0 | .0 | .0 |
| | .149E 13 | .117E 13 | .444E 12 | .788E 11 | .748E 11 | .685E 11 |

CC 30500501--CASTABLE REF RAW MATERIAL DRIER --TOTAL SCC -SIC = 0 -TOT RECS = 28

```
EMP RANGE     COUNT
                       ----------------------------------------------------------------------------------------------------
   0.- 100.  .116E 12  !H
 101.- 200.  .555E 12  !HHHHH
 201.- 300.  .206E 12  !HH
 301.- 400.  .0        !
 401.- 500.  .635E 11  !H
 501.- 600.  .232E 12  !HH
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90--------100
```

SCC= 30500502--CASTABLE REF RAW MATERIAL CRUSHIN -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 14

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .344E 09 | .323E 09 | .471E 08 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .344E 09 | .323E 09 | .471E 08 | .0 | .0 | .0 |

SCC = 30500502--CASTABLE REFRAW MATERIAL CRUSHIN -NO CONTROL EQUIPMENT -TOT RECS = 14

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .344E 09 | .323E 09 | .471E 08 | .0 | .0 | .0 |
| | .344E 09 | .323E 09 | .471E 08 | .0 | .0 | .0 |

CC = 30500502--CASTABLE REF RAW MATERIAL CRUSHIN-- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 14

```
TEMP RANGE    COUNT
                       ------------------------------------------------------------------------------------------------------
   0.- 100.  .323E 09 !
 101.- 200.  .0       !
 201.- 300.  .0       !
 301.- 400.  .0       !
 401.- 500.  .0       !
 501.- 600.  .0       !
 601.- 700.  .0       !
 701.- 800.  .0       !
 801.- 900.  .0       !
 901.-1000.  .0       !
1001.-1100.  .0       !
1101.-1200.  .0       !
1201.-1300.  .0       !
1301.-1400.  .0       !
1401.-1500.  .0       !
1501.-1600.  .0       !
1601.-1700.  .0       !
1701.-1800.  .0       !
1801.-1900.  .0       !
1901.-2000.  .0       !
2001.-2100.  .0       !
2101.-2200.  .0       !
2201.-2300.  .0       !
2301.-2400.  .0       !
2401.-2500.  .0       !
2501.-2600.  .0       !
2601.-2700.  .0       !
2701.-2800.  .0       !
2801.-2900.  .0       !
2901.-3000.  .0       !
                      0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500502--CASTABLE REF RAW MATERIAL CRUSHIN -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 18

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .473E 11 | .443E 11 | .102E 11 | .0 | .0 | .0 |
| 101.- 200. | .120E 11 | .903E 10 | .444E 10 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .593E 11 | .534E 11 | .146E 11 | .0 | .0 | .0 |

```
SCC = 30500502--CASTABLE REFRAW MATERIAL CRUSHIN -WITH CONTROL EQUIPMENT -TOT RECS =    18

SIC          MAXIMUM    EXPECTED    MINIMUM     MAXIMUM     EXPECTED     MINIMUM
             60 DEG     60 DEG       60 DEG       300DEG    300 DEG      300 DEG
   32       .593E 11   .534E 11    .146E 11    .0          .0           .0

            .593E 11   .534E 11    .146E 11    .0          .0           .0


CC =30500502--CASTABLE REF RAW MATERIAL CRUSHIN---WITH CONTROL EQUIPMENT  -SIC=    0 -TOTAL RECS =     18

TEMP RANGE    COUNT

                           -----------------------------------------------------------------------------------------------------
   0.- 100.   .443E 11  !H
 101.- 200.   .903E 10  !H
 201.- 300.   .0        !
 301.- 400.   .0        !
 401.- 500.   .0        !
 501.- 600.   .0        !
 601.- 700.   .0        !
 701.- 800.   .0        !
 801.- 900.   .0        !
 901.-1000.   .0        !
1001.-1100.   .0        !
1101.-1200.   .0        !
1201.-1300.   .0        !
1301.-1400.   .0        !
1401.-1500.   .0        !
1501.-1600.   .0        !
1601.-1700.   .0        !
1701.-1800.   .0        !
1801.-1900.   .0        !
1901.-2000.   .0        !
2001.-2100.   .0        !
2101.-2200.   .0        !
2201.-2300.   .0        !
2301.-2400.   .0        !
2401.-2500.   .0        !
2501.-2600.   .0        !
2601.-2700.   .0        !
2701.-2800.   .0        !
2801.-2900.   .0        !
2901.-3000.   .0        !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500502--CASTABLE REF RAW MATERIAL CRUSHIN -TOTAL SCC -SIC = 0 -TOT RECS = 32

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .476E 11 | .447E 11 | .102E 11 | .0 | .0 | .0 |
| 101.- 200. | .120E 11 | .903E 10 | .444E 10 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .596E 11 | .537E 11 | .147E 11 | .0 | .0 | .0 |

SCC = 30500502--CASTABLE REFRAW MATERIAL CRUSHIN -TOTAL SCC -TOT RECS = 32

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .596E 11 | .537E 11 | .147E 11 | .0 | .0 | .0 |
| | .596E 11 | .537E 11 | .147E 11 | .0 | .0 | .0 |

CC 30500502--CASTABLE REF RAW MATERIAL CRUSHIN--TOTAL SCC -SIC = 0 -TOT RECS = 32

```
EMP RANGE    COUNT

                         ----------------------------------------------------------------------------------------------------
   0.- 100.  .447E 11   !H
 101.- 200.  .903E 10   !H
 201.- 300.  .0         !
 301.- 400.  .0         !
 401.- 500.  .0         !
 501.- 600.  .0         !
 601.- 700.  .0         !
 701.- 800.  .0         !
 801.- 900.  .0         !
 901.-1000.  .0         !
1001.-1100.  .0         !
1101.-1200.  .0         !
1201.-1300.  .0         !
1301.-1400.  .0         !
1401.-1500.  .0         !
1501.-1600.  .0         !
1601.-1700.  .0         !
1701.-1800.  .0         !
1801.-1900.  .0         !
1901.-2000.  .0         !
2001.-2100.  .0         !
2101.-2200.  .0         !
2201.-2300.  .0         !
2301.-2400.  .0         !
2401.-2500.  .0         !
2501.-2600.  .0         !
2601.-2700.  .0         !
2701.-2800.  .0         !
2801.-2900.  .0         !
2901.-3000.  .0         !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500503--CASTABLE REF ELECTRIC ARC MELTING -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 0

| | | | | | | |
|---|---|---|---|---|---|---|
| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |

0 RECORDS FOR THIS SECTION OF SCC

SCC = 30500503--CASTABLE REFELECTRIC ARC MELTING -NO CONTROL EQUIPMENT -TOT RECS = 0

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|

SCC= 30500503--CASTABLE REF ELECTRIC ARC MELTING -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 8

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .247E 10 | .232E 10 | .189E 10 | .0 | .0 | .0 |
| 101.- 200. | .321E 11 | .279E 11 | .137E 11 | .0 | .0 | .0 |
| 201.- 300. | .418E 11 | .316E 11 | .163E 11 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .594E 11 | .472E 11 | .290E 11 | .903E 10 | .857E 10 | .784E 10 |
| 501.- 600. | .357E 11 | .289E 11 | .186E 11 | .803E 10 | .762E 10 | .697E 10 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .172E 12 | .138E 12 | .796E 11 | .171E 11 | .162E 11 | .148E 11 |

SCC = 30500503--CASTABLE REFELECTRIC ARC MELTING -WITH CONTROL EQUIPMENT -TOT RECS = 8

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .172E 12 | .138E 12 | .796E 11 | .171E 11 | .162E 11 | .148E 11 |
| | .172E 12 | .138E 12 | .796E 11 | .171E 11 | .162E 11 | .148E 11 |

CC =30500503--CASTABLE REF ELECTRIC ARC MELTING---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 8

```
TEMP RANGE     COUNT
                          ------------------------------------------------------------------------------------------------------
   0.- 100.   .232E 10   !H
 101.- 200.   .279E 11   !H
 201.- 300.   .316E 11   !H
 301.- 400.   .0         !
 401.- 500.   .472E 11   !H
 501.- 600.   .289E 11   !H
 601.- 700.   .0         !
 701.- 800.   .0         !
 801.- 900.   .0         !
 901.-1000.   .0         !
1001.-1100.   .0         !
1101.-1200.   .0         !
1201.-1300.   .0         !
1301.-1400.   .0         !
1401.-1500.   .0         !
1501.-1600.   .0         !
1601.-1700.   .0         !
1701.-1800.   .0         !
1801.-1900.   .0         !
1901.-2000.   .0         !
2001.-2100.   .0         !
2101.-2200.   .0         !
2201.-2300.   .0         !
2301.-2400.   .0         !
2401.-2500.   .0         !
2501.-2600.   .0         !
2601.-2700.   .0         !
2701.-2800.   .0         !
2801.-2900.   .0         !
2901.-3000.   .0         !
                         0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500504--CASTABLE REF CURING OVEN -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 10

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .281E 12 | .214E 12 | .734E 11 | .0 | .0 | .0 |
| 301.- 400. | .271E 12 | .211E 12 | .122E 12 | .0 | .0 | .0 |
| 401.- 500. | .223E 12 | .175E 12 | .0 | .188E 11 | .179E 11 | .164E 11 |
| 501.- 600. | .811E 11 | .657E 11 | .0 | .251E 11 | .238E 11 | .0 |
| 601.- 700. | .572E 11 | .466E 11 | .426E 11 | .189E 11 | .180E 11 | .164E 11 |
| 701.- 800. | .193E 12 | .160E 12 | .307E 11 | .147E 11 | .140E 11 | .128E 11 |
| 801.- 900. | .0 | .0 | .110E 12 | .639E 11 | .608E 11 | .556E 11 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .111E 13 | .872E 12 | .379E 12 | .141E 12 | .134E 12 | .101E 12 |

SCC = 30500504--CASTABLE REFCURING OVEN -NO CONTROL EQUIPMENT -TOT RECS = 10

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .111E 13 | .872E 12 | .379E 12 | .141E 12 | .134E 12 | .101E 12 |
| | .111E 13 | .872E 12 | .379E 12 | .141E 12 | .134E 12 | .101E 12 |

CC = 30500504--CASTABLE REF CURING OVEN -- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 10

```
TEMP RANGE   COUNT
                          ----------------------------------------------------------------------------------------------------
   0.- 100.   .0        !
 101.- 200.   .0        !
 201.- 300.   .214E 12  !HH
 301.- 400.   .211E 12  !HH
 401.- 500.   .175E 12  !H
 501.- 600.   .657E 11  !H
 601.- 700.   .466E 11  !H
 701.- 800.   .160E 12  !H
 801.- 900.   .0        !
 901.-1000.   .0        !
1001.-1100.   .0        !
1101.-1200.   .0        !
1201.-1300.   .0        !
1301.-1400.   .0        !
1401.-1500.   .0        !
1501.-1600.   .0        !
1601.-1700.   .0        !
1701.-1800.   .0        !
1801.-1900.   .0        !
1901.-2000.   .0        !
2001.-2100.   .0        !
2101.-2200.   .0        !
2201.-2300.   .0        !
2301.-2400.   .0        !
2401.-2500.   .0        !
2501.-2600.   .0        !
2601.-2700.   .0        !
2701.-2800.   .0        !
2801.-2900.   .0        !
2901.-3000.   .0        !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500504--CASTABLE REF CURING OVEN -WITH CONTROL EQUIPMENT -SIC = ) -TOT RECS = 5

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .506E 09 | .475E 09 | .387E 09 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .308E 12 | .236E 12 | .129E 12 | .0 | .0 | .0 |
| 301.- 400. | .301E 12 | .235E 12 | .137E 12 | .224E 11 | .212E 11 | .194E 11 |
| 401.- 500. | .799E 11 | .635E 11 | .390E 11 | .121E 11 | .115E 11 | .105E 11 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .689E 12 | .534E 12 | .305E 12 | .345E 11 | .327E 11 | .300E 11 |

SCC = 30500504--CASTABLE REFCURING OVEN -WITH CONTROL EQUIPMENT -TOT RECS = 5

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .689E 12 | .534E 12 | .305E 12 | .345E 11 | .327E 11 | .300E 11 |
| | .689E 12 | .534E 12 | .305E 12 | .345E 11 | .327E 11 | .300E 11 |

CC =30500504--CASTABLE REF CURING OVEN ---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 5

```
TEMP RANGE    COUNT
                     ---------------------------------------------------------------------------------------------
   0.- 100.   .475E 09  !
 101.- 200.   .0        !
 201.- 300.   .236E 12  !HH
 301.- 400.   .235E 12  !HH
 401.- 500.   .635E 11  !H
 501.- 600.   .0        !
 601.- 700.   .0        !
 701.- 800.   .0        !
 801.- 900.   .0        !
 901.-1000.   .0        !
1001.-1100.   .0        !
1101.-1200.   .0        !
1201.-1300.   .0        !
1301.-1400.   .0        !
1401.-1500.   .0        !
1501.-1600.   .0        !
1601.-1700.   .0        !
1701.-1800.   .0        !
1801.-1900.   .0        !
1901.-2000.   .0        !
2001.-2100.   .0        !
2101.-2200.   .0        !
2201.-2300.   .0        !
2301.-2400.   .0        !
2401.-2500.   .0        !
2501.-2600.   .0        !
2601.-2700.   .0        !
2701.-2800.   .0        !
2801.-2900.   .0        !
2901.-3000.   .0        !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500504--CASTABLE REF CURING OVEN -TOTAL SCC -SIC = 0 -TOT RECS = 15

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .506E 09 | .475E 09 | .387E 09 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .589E 12 | .449E 12 | .203E 12 | .0 | .0 | .0 |
| 301.- 400. | .572E 12 | .446E 12 | .259E 12 | .412E 11 | .391E 11 | .358E 11 |
| 401.- 500. | .302E 12 | .239E 12 | .390E 11 | .372E 11 | .353E 11 | .105E 11 |
| 501.- 600. | .811E 11 | .657E 11 | .426E 11 | .189E 11 | .180E 11 | .164E 11 |
| 601.- 700. | .572E 11 | .466E 11 | .307E 11 | .147E 11 | .140E 11 | .128E 11 |
| 701.- 800. | .193E 12 | .160E 12 | .110E 12 | .639E 11 | .608E 11 | .556E 11 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .179E 13 | .141E 13 | .684E 12 | .176E 12 | .167E 12 | .131E 12 |

SCC = 30500504--CASTABLE REFCURING OVEN  -TOTAL SCC -TOT RECS = 15

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .179E 13 | .141E 13 | .684E 12 | .176E 12 | .167E 12 | .131E 12 |
| | .179E 13 | .141E 13 | .684E 12 | .176E 12 | .167E 12 | .131E 12 |

CC 30500504--CASTABLE REF CURING OVEN  --TOTAL SCC -SIC = 0 -TOT RECS = 15

```
EMP RANGE     COUNT
                      ------------------------------------------------------------------------------------------------
   0.- 100.  .475E 09 !
 101.- 200.  .0       !
 201.- 300.  .449E 12 !HHHH
 301.- 400.  .446E 12 !HHHH
 401.- 500.  .239E 12 !HH
 501.- 600.  .657E 11 !H
 601.- 700.  .466E 11 !H
 701.- 800.  .160E 12 !H
 801.- 900.  .0       !
 901.-1000.  .0       !
1001.-1100.  .0       !
1101.-1200.  .0       !
1201.-1300.  .0       !
1301.-1400.  .0       !
1401.-1500.  .0       !
1501.-1600.  .0       !
1601.-1700.  .0       !
1701.-1800.  .0       !
1801.-1900.  .0       !
1901.-2000.  .0       !
2001.-2100.  .0       !
2101.-2200.  .0       !
2201.-2300.  .0       !
2301.-2400.  .0       !
2401.-2500.  .0       !
2501.-2600.  .0       !
2601.-2700.  .0       !
2701.-2800.  .0       !
2801.-2900.  .0       !
2901.-3000.  .0       !
                      0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500505--CASTABLE REF MOLDING AND SHAKEOUT -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 2

| TEMP | MAXIMUM | EXPECTED | MINIMUM | MAXIMUM | EXPECTED | MINIMUM |
|---|---|---|---|---|---|---|
| | 60 DEG | 60 DEG | 60 DEG | 300 DEG | 300 DEG | 300 DEG |

0 RECORDS FOR THIS SECTION OF SCC

SCC = 30500505--CASTABLE REFMOLDING AND SHAKEOUT -NO CONTROL EQUIPMENT -TOT RECS = 2

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|

SCC= 30500505--CASTABLE REF MOLDING AND SHAKEOUT -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 2

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .576E 11 | .541E 11 | .440E 11 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .576E 11 | .541E 11 | .440E 11 | .0 | .0 | .0 |

SCC = 30500505--CASTABLE REFMOLDING AND SHAKEOUT -WITH CONTROL EQUIPMENT -TOT RECS = 2

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 33 | .466E 11 | .437E 11 | .356E 11 | .0 | .0 | .0 |
| 35 | .110E 11 | .103E 11 | .843E 10 | .0 | .0 | .0 |
| | .576E 11 | .541E 11 | .440E 11 | .0 | .0 | .0 |

CC =30500505--CASTABLE REF MOLDING AND SHAKEOUT---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 2

```
TEMP RANGE   COUNT

   0.- 100.  .541E 11  ------------------------------------------------------------------------------------------------
                       !H
 101.- 200.  .0        !
 201.- 300.  .0        !
 301.- 400.  .0        !
 401.- 500.  .0        !
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500599--CASTABLE REF OTHER/NOT CLASSIFIED -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 11

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .743E 10 | .697E 10 | .568E 10 | .0 | .0 | .0 |
| 101.- 200. | .354E 12 | .265E 12 | .662E 11 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
|  | .361E 12 | .272E 12 | .719E 11 | .0 | .0 | .0 |

SCC = 30500599--CASTABLE REFOTHER/NOT CLASSIFIED -NO CONTROL EQUIPMENT -TOT RECS = 11

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .361E 12 | .272E 12 | .719E 11 | .0 | .0 | .0 |
| | .361E 12 | .272E 12 | .719E 11 | .0 | .0 | .0 |

CC = 30500599--CASTABLE REF OTHER/NOT CLASSIFIED-- -NO CONTROL EQUIPMENT -SIC= ) -TOTAL RECS = 11

```
TEMP RANGE   COUNT
                      ------------------------------------------------------------------------------------------------------
   0.- 100.  .697E 10 !H
 101.- 200.  .265E 12 !HH
 201.- 300.  .0       !
 301.- 400.  .0       !
 401.- 500.  .0       !
 501.- 600.  .0       !
 601.- 700.  .0       !
 701.- 800.  .0       !
 801.- 900.  .0       !
 901.-1000.  .0       !
1001.-1100.  .0       !
1101.-1200.  .0       !
1201.-1300.  .0       !
1301.-1400.  .0       !
1401.-1500.  .0       !
1501.-1600.  .0       !
1601.-1700.  .0       !
1701.-1800.  .0       !
1801.-1900.  .0       !
1901.-2000.  .0       !
2001.-2100.  .0       !
2101.-2200.  .0       !
2201.-2300.  .0       !
2301.-2400.  .0       !
2401.-2500.  .0       !
2501.-2600.  .0       !
2601.-2700.  .0       !
2701.-2800.  .0       !
2801.-2900.  .0       !
2901.-3000.  .0       !
                      0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500599--CASTABLE REF OTHER/NOT CLASSIFIED -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 29

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .110E 12 | .103E 12 | .491E 11 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .743E 11 | .567E 11 | .307E 11 | .0 | .0 | .0 |
| 301.- 400. | .151E 11 | .118E 11 | .682E 10 | .106E 10 | .101E 10 | .924E 09 |
| 401.- 500. | .121E 12 | .948E 11 | .562E 11 | .122E 11 | .116E 11 | .106E 11 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .368E 12 | .301E 12 | .200E 12 | .101E 12 | .957E 11 | .875E 11 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .689E 12 | .568E 12 | .343E 12 | .114E 12 | .108E 12 | .990E 11 |

SCC = 30500599--CASTABLE REFOTHER/NOT CLASSIFIED -WITH CONTROL EQUIPMENT -TOT RECS = 29

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .689E 12 | .568E 12 | .343E 12 | .114E 12 | .108E 12 | .990E 11 |
| | .689E 12 | .568E 12 | .343E 12 | .114E 12 | .108E 12 | .990E 11 |

CC =30500599--CASTABLE REF OTHER/NOT CLASSIFIED---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 29

```
TEMP RANGE   COUNT
                      ------------------------------------------------------------------------------------------------------
   0.- 100.  .103E 12 !H
 101.- 200.  .0       !
 201.- 300.  .567E 11 !H
 301.- 400.  .118E 11 !H
 401.- 500.  .948E 11 !H
 501.- 600.  .0       !
 601.- 700.  .301E 12 !HHH
 701.- 800.  .0       !
 801.- 900.  .0       !
 901.-1000.  .0       !
1001.-1100.  .0       !
1101.-1200.  .0       !
1201.-1300.  .0       !
1301.-1400.  .0       !
1401.-1500.  .0       !
1501.-1600.  .0       !
1601.-1700.  .0       !
1701.-1800.  .0       !
1801.-1900.  .0       !
1901.-2000.  .0       !
2001.-2100.  .0       !
2101.-2200.  .0       !
2201.-2300.  .0       !
2301.-2400.  .0       !
2401.-2500.  .0       !
2501.-2600.  .0       !
2601.-2700.  .0       !
2701.-2800.  .0       !
2801.-2900.  .0       !
2901.-3000.  .0       !
                      0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500599--CASTABLE REF OTHER/NOT CLASSIFIED -TOTAL SCC -SIC = 0 -TOT RECS = 40

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .118E 12 | .110E 12 | .547E 11 | .0 | .0 | .0 |
| 101.- 200. | .354E 12 | .265E 12 | .662E 11 | .0 | .0 | .0 |
| 201.- 300. | .743E 11 | .567E 11 | .307E 11 | .0 | .0 | .0 |
| 301.- 400. | .151E 11 | .118E 11 | .682E 10 | .106E 10 | .101E 10 | .924E 09 |
| 401.- 500. | .121E 12 | .948E 11 | .562E 11 | .122E 11 | .116E 11 | .106E 11 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .368E 12 | .301E 12 | .200E 12 | .101E 12 | .957E 11 | .875E 11 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .105E 13 | .840E 12 | .415E 12 | .114E 12 | .108E 12 | .990E 11 |

SCC = 30500599--CASTABLE REFOTHER/NOT CLASSIFIED -TOTAL SCC -TOT RECS = 40

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .105E 13 | .840E 12 | .415E 12 | .114E 12 | .108E 12 | .990E 11 |
| | .105E 13 | .840E 12 | .415E 12 | .114E 12 | .108E 12 | .990E 11 |

CC 30500599--CASTABLE REF OTHER/NOT CLASSIFIED--TOTAL SCC -SIC = 0 -TOT RECS = 40

```
EMP RANGE   COUNT
                       ---------------------------------------------------------------------------------------------------
   0.- 100.  .110E 12  !H
 101.- 200.  .265E 12  !HH
 201.- 300.  .567E 11  !H
 301.- 400.  .118E 11  !H
 401.- 500.  .948E 11  !H
 501.- 600.  .0        !
 601.- 700.  .301E 12  !HHH
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500601--CEMENT MANUF KILNS -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 2

| TEMP | MAXIMUM | EXPECTED | MINIMUM | MAXIMUM | EXPECTED | MINIMUM |
|---|---|---|---|---|---|---|
| | 60 DEG | 60 DEG | 60 DEG | 300 DEG | 300 DEG | 300 DEG |

0 RECORDS FOR THIS SECTION OF SCC

SCC = 30500601--CEMENT MANUFKILNS -NO CONTROL EQUIPMENT -TOT RECS = 2

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|

SCC= 30500601--CEMENT MANUF KILNS -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 56

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .608E 11 | .571E 11 | .155E 11 | .0 | .0 | .0 |
| 101.- 200. | .965E 12 | .778E 12 | .382E 12 | .0 | .0 | .0 |
| 201.- 300. | .112E 13 | .848E 12 | .446E 12 | .0 | .0 | .0 |
| 301.- 400. | .152E 13 | .118E 13 | .482E 12 | .772E 11 | .733E 11 | .599E 11 |
| 401.- 500. | .148E 14 | .117E 14 | .466E 13 | .181E 13 | .172E 13 | .108E 13 |
| 501.- 600. | .568E 13 | .455E 13 | .287E 13 | .108E 13 | .102E 13 | .937E 12 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .241E 14 | .191E 14 | .886E 13 | .297E 13 | .282E 13 | .208E 13 |

SCC = 30500601--CEMENT MANUFKILNS -WITH CONTROL EQUIPMENT -TOT RECS = 56

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 20 | .406E 11 | .380E 11 | .0 | .0 | .0 | .0 |
| 29 | .521E 12 | .410E 12 | .628E 10 | .568E 11 | .539E 11 | .0 |
| 32 | .236E 14 | .186E 14 | .885E 13 | .291E 13 | .276E 13 | .208E 13 |
| | .241E 14 | .191E 14 | .886E 13 | .297E 13 | .282E 13 | .208E 13 |

CC =30500601--CEMENT MANUF KILNS ---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 56

```
TEMP RANGE   COUNT
                      ----------------------------------------------------------------------------------------------------
   0.- 100.  .571E 11 !H
 101.- 200.  .778E 12 !HHHHHHH
 201.- 300.  .848E 12 !HHHHHHHH
 301.- 400.  .118E 13 !HHHHHHHHHHH
 401.- 500.  .117E 14 !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 501.- 600.  .455E 13 !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 601.- 700.  .0       !
 701.- 800.  .0       !
 801.- 900.  .0       !
 901.-1000.  .0       !
1001.-1100.  .0       !
1101.-1200.  .0       !
1201.-1300.  .0       !
1301.-1400.  .0       !
1401.-1500.  .0       !
1501.-1600.  .0       !
1601.-1700.  .0       !
1701.-1800.  .0       !
1801.-1900.  .0       !
1901.-2000.  .0       !
2001.-2100.  .0       !
2101.-2200.  .0       !
2201.-2300.  .0       !
2301.-2400.  .0       !
2401.-2500.  .0       !
2501.-2600.  .0       !
2601.-2700.  .0       !
2701.-2800.  .0       !
2801.-2900.  .0       !
2901.-3000.  .0       !
                      0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500602--CEMENT MANUF DRIERS AND GRINDERS, -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 12

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .145E 11 | .136E 11 | .0 | .0 | .0 | .0 |
| 101.- 200. | .321E 12 | .241E 12 | .134E 11 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .336E 12 | .255E 12 | .134E 11 | .0 | .0 | .0 |

SCC = 30500602--CEMENT MANUFDRIERS AND GRINDERS, -NO CONTROL EQUIPMENT -TOT RECS = 12

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 14 | .669E 10 | .628E 10 | .0 | .0 | .0 | .0 |
| 32 | .329E 12 | .249E 12 | .134E 11 | .0 | .0 | .0 |
| | .336E 12 | .255E 12 | .134E 11 | .0 | .0 | .0 |

CC = 30500602--CEMENT MANUF DRIERS AND GRINDERS,-- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 12

```
TEMP RANGE   COUNT
               ------------------------------------------------------------------------------------------------------
   0.- 100.  .136E 11  !H
 101.- 200.  .241E 12  !HH
 201.- 300.  .0        !
 301.- 400.  .0        !
 401.- 500.  .0        !
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500602--CEMENT MANUF DRIERS AND GRINDERS, -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 142

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .700E 12 | .656E 12 | .387E 12 | .0 | .0 | .0 |
| 101.- 200. | .773E 13 | .581E 13 | .171E 13 | .0 | .0 | .0 |
| 201.- 300. | .192E 13 | .145E 13 | .518E 12 | .0 | .0 | .0 |
| 301.- 400. | .223E 13 | .172E 13 | .898E 12 | .757E 11 | .718E 11 | .592E 11 |
| 401.- 500. | .218E 12 | .171E 12 | .998E 11 | .176E 11 | .167E 11 | .153E 11 |
| 501.- 600. | .406E 12 | .327E 12 | .109E 12 | .865E 11 | .821E 11 | .419E 11 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .132E 14 | .101E 14 | .372E 13 | .180E 12 | .171E 12 | .116E 12 |

SCC = 30500602--CEMENT MANUFDRIERS AND GRINDERS, -WITH CONTROL EQUIPMENT -TOT RECS = 142

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .132E 14 | .101E 14 | .369E 13 | .180E 12 | .171E 12 | .116E 12 |
| 99 | .460E 11 | .431E 11 | .352E 11 | .0 | .0 | .0 |
| | .132E 14 | .101E 14 | .372E 13 | .180E 12 | .171E 12 | .116E 12 |

CC =30500602--CEMENT MANUF DRIERS AND GRINDERS,---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 142

```
TEMP RANGE   COUNT
                      -----------------------------------------------------------------------------------------------------
   0.- 100.  .656E 12 !HHHHHH
 101.- 200.  .581E 13 !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 201.- 300.  .145E 13 !HHHHHHHHHHHHHHH
 301.- 400.  .172E 13 !HHHHHHHHHHHHHHHHH
 401.- 500.  .171E 12 !H
 501.- 600.  .327E 12 !HHH
 601.- 700.  .0       !
 701.- 800.  .0       !
 801.- 900.  .0       !
 901.-1000.  .0       !
1001.-1100.  .0       !
1101.-1200.  .0       !
1201.-1300.  .0       !
1301.-1400.  .0       !
1401.-1500.  .0       !
1501.-1600.  .0       !
1601.-1700.  .0       !
1701.-1800.  .0       !
1801.-1900.  .0       !
1901.-2000.  .0       !
2001.-2100.  .0       !
2101.-2200.  .0       !
2201.-2300.  .0       !
2301.-2400.  .0       !
2401.-2500.  .0       !
2501.-2600.  .0       !
2601.-2700.  .0       !
2701.-2800.  .0       !
2801.-2900.  .0       !
2901.-3000.  .0       !
                      0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500602--CEMENT MANUF DRIERS AND GRINDERS, -TOTAL SCC -SIC = 0 -TOT RECS = 154

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .714E 12 | .670E 12 | .387E 12 | .0 | .0 | .0 |
| 101.- 200. | .805E 13 | .605E 13 | .173E 13 | .0 | .0 | .0 |
| 201.- 300. | .192E 13 | .145E 13 | .518E 12 | .0 | .0 | .0 |
| 301.- 400. | .223E 13 | .172E 13 | .898E 12 | .757E 11 | .718E 11 | .592E 11 |
| 401.- 500. | .218E 12 | .171E 12 | .998E 11 | .176E 11 | .167E 11 | .153E 11 |
| 501.- 600. | .406E 12 | .327E 12 | .109E 12 | .865E 11 | .821E 11 | .419E 11 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .135E 14 | .104E 14 | .374E 13 | .180E 12 | .171E 12 | .116E 12 |

SCC = 30500602--CEMENT MANUFDRIERS AND GRINDERS, -TOTAL SCC -TOT RECS = 154

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 14 | .669E 10 | .628E 10 | .0 | .0 | .0 | .0 |
| 32 | .135E 14 | .103E 14 | .370E 13 | .180E 12 | .171E 12 | .116E 12 |
| 99 | .460E 11 | .431E 11 | .352E 11 | .0 | .0 | .0 |
| | .135E 14 | .104E 14 | .374E 13 | .180E 12 | .171E 12 | .116E 12 |

CC 30500602--CEMENT MANUF DRIERS AND GRINDERS,--TOTAL SCC -SIC = 0 -TOT RECS = 154

```
EMP RANGE    COUNT

                        ------------------------------------------------------------------------------------------------------
    0.- 100.  .670E 12  !HHHHHH
  101.- 200.  .605E 13  !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
  201.- 300.  .145E 13  !HHHHHHHHHHHHHH
  301.- 400.  .172E 13  !HHHHHHHHHHHHHHHHH
  401.- 500.  .171E 12  !H
  501.- 600.  .327E 12  !HHH
  601.- 700.  .0        !
  701.- 800.  .0        !
  801.- 900.  .0        !
  901.-1000.  .0        !
 1001.-1100.  .0        !
 1101.-1200.  .0        !
 1201.-1300.  .0        !
 1301.-1400.  .0        !
 1401.-1500.  .0        !
 1501.-1600.  .0        !
 1601.-1700.  .0        !
 1701.-1800.  .0        !
 1801.-1900.  .0        !
 1901.-2000.  .0        !
 2001.-2100.  .0        !
 2101.-2200.  .0        !
 2201.-2300.  .0        !
 2301.-2400.  .0        !
 2401.-2500.  .0        !
 2501.-2600.  .0        !
 2601.-2700.  .0        !
 2701.-2800.  .0        !
 2801.-2900.  .0        !
 2901.-3000.  .0        !
                        0---------10---------20---------30---------40---------50---------60---------70---------80---------90-------100
```

SCC= 30500603--CEMENT MANUF KILNS-OIL FIRED -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 1

| | | | | | | |
|---|---|---|---|---|---|---|
| TEMP | MAXIMUM | EXPECTED | MINIMUM | MAXIMUM | EXPECTED | MINIMUM |
| | 60 DEG | 60 DEG | 60 DEG | 300 DEG | 300 DEG | 300 DEG |

0 RECORDS FOR THIS SECTION OF SCC

SCC = 30500603--CEMENT MANUFKILNS-OIL FIRED -NO CONTROL EQUIPMENT -TOT RECS = 1

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|

SCC= 30500603--CEMENT MANUF KILNS-OIL FIRED -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 24

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .373E 12 | .350E 12 | .712E 11 | .0 | .0 | .0 |
| 101.- 200. | .708E 12 | .530E 12 | .262E 12 | .0 | .0 | .0 |
| 201.- 300. | .694E 12 | .525E 12 | .275E 12 | .0 | .0 | .0 |
| 301.- 400. | .469E 13 | .363E 13 | .152E 13 | .177E 12 | .168E 12 | .114E 12 |
| 401.- 500. | .258E 13 | .203E 13 | .896E 12 | .296E 12 | .281E 12 | .186E 12 |
| 501.- 600. | .252E 13 | .202E 13 | .128E 13 | .488E 12 | .463E 12 | .424E 12 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .116E 14 | .909E 13 | .430E 13 | .960E 12 | .912E 12 | .724E 12 |

SCC = 30500603--CEMENT MANUFKILNS-OIL FIRED -WITH CONTROL EQUIPMENT -TOT RECS = 24

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .115E 14 | .900E 13 | .423E 13 | .960E 12 | .912E 12 | .724E 12 |
| 33 | .932E 11 | .874E 11 | .712E 11 | .0 | .0 | .0 |
| | .116E 14 | .909E 13 | .430E 13 | .960E 12 | .912E 12 | .724E 12 |

CC =30500603--CEMENT MANUF KILNS-OIL FIRED ---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 24

```
TEMP RANGE    COUNT
                        ---------------------------------------------------------------------------------------------------
   0.- 100.  .350E 12  !HHH
 101.- 200.  .530E 12  !HHHHH
 201.- 300.  .525E 12  !HHHHH
 301.- 400.  .363E 13  !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 401.- 500.  .203E 13  !HHHHHHHHHHHHHHHHHHHHHH
 501.- 600.  .202E 13  !HHHHHHHHHHHHHHHHHHHHHH
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500604--CEMENT MANUF KILNS-GAS FIRED -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 4

| TEMP | MAXIMUM | EXPECTED | MINIMUM | MAXIMUM | EXPECTED | MINIMUM |
|---|---|---|---|---|---|---|
| | 60 DEG | 60 DEG | 60 DEG | 300 DEG | 300 DEG | 300 DEG |

0 RECORDS FOR THIS SECTION OF SCC

SCC = 30500604--CEMENT MANUFKILNS-GAS FIRED -NO CONTROL EQUIPMENT -TOT RECS = 4

| SIC | MAXIMUM | EXPECTED | MINIMUM | MAXIMUM | EXPECTED | MINIMUM |
|---|---|---|---|---|---|---|
| | 60 DEG | 60 DEG | 60 DEG | 300 DEG | 300 DEG | 300 DEG |

SCC= 30500604--CEMENT MANUF KILNS-GAS FIRED -WITH CONTROL EQUIPMENT -SIC = ) -TOT RECS = 66

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .210E 12 | .197E 12 | .258E 11 | .0 | .0 | .0 |
| 101.- 200. | .170E 13 | .127E 13 | .455E 12 | .0 | .0 | .0 |
| 201.- 300. | .374E 13 | .285E 13 | .108E 13 | .0 | .0 | .0 |
| 301.- 400. | .136E 14 | .106E 14 | .276E 13 | .832E 12 | .790E 12 | .252E 12 |
| 401.- 500. | .580E 13 | .456E 13 | .271E 13 | .608E 12 | .577E 12 | .528E 12 |
| 501.- 600. | .518E 13 | .418E 13 | .267E 13 | .109E 13 | .103E 13 | .945E 12 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .302E 14 | .236E 14 | .970E 13 | .253E 13 | .240E 13 | .173E 13 |

SCC = 30500604--CEMENT MANUFKILNS-GAS FIRED -WITH CONTROL EQUIPMENT -TOT RECS = 66

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .290E 14 | .227E 14 | .937E 13 | .247E 13 | .235E 13 | .168E 13 |
| 99 | .121E 13 | .929E 12 | .338E 12 | .576E 11 | .547E 11 | .501E 11 |
| | .302E 14 | .236E 14 | .970E 13 | .253E 13 | .240E 13 | .173E 13 |

CC =30500604--CEMENT MANUF KILNS-GAS FIRED ---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 66

| TEMP RANGE | COUNT |
|---|---|
| 0.- 100. | .197E 12 |
| 101.- 200. | .127E 13 |
| 201.- 300. | .285E 13 |
| 301.- 400. | .106E 14 |
| 401.- 500. | .456E 13 |
| 501.- 600. | .418E 13 |
| 601.- 700. | .0 |
| 701.- 800. | .0 |
| 801.- 900. | .0 |
| 901.-1000. | .0 |
| 1001.-1100. | .0 |
| 1101.-1200. | .0 |
| 1201.-1300. | .0 |
| 1301.-1400. | .0 |
| 1401.-1500. | .0 |
| 1501.-1600. | .0 |
| 1601.-1700. | .0 |
| 1701.-1800. | .0 |
| 1801.-1900. | .0 |
| 1901.-2000. | .0 |
| 2001.-2100. | .0 |
| 2101.-2200. | .0 |
| 2201.-2300. | .0 |
| 2301.-2400. | .0 |
| 2401.-2500. | .0 |
| 2501.-2600. | .0 |
| 2601.-2700. | .0 |
| 2701.-2800. | .0 |
| 2801.-2900. | .0 |
| 2901.-3000. | .0 |

SCC= 30500605--CEMENT MANUF KILNS-COAL FIRED -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 10

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .347E 12 | .281E 12 | .182E 12 | .808E 11 | .767E 11 | .702E 11 |
| 601.- 700. | .406E 12 | .333E 12 | .222E 12 | .115E 12 | .109E 12 | .995E 11 |
| 701.- 800. | .184E 13 | .152E 13 | .0 | .609E 12 | .579E 12 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .495E 12 | .423E 12 | .312E 12 | .233E 12 | .222E 12 | .202E 12 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .309E 13 | .256E 13 | .717E 12 | .104E 13 | .987E 12 | .372E 12 |

SCC = 30500605--CEMENT MANUFKILNS-COAL FIRED -NO CONTROL EQUIPMENT -TOT RECS = 10

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .309E 13 | .256E 13 | .717E 12 | .104E 13 | .987E 12 | .372E 12 |
| | .309E 13 | .256E 13 | .717E 12 | .104E 13 | .987E 12 | .372E 12 |

CC = 30500605--CEMENT MANUF KILNS-COAL FIRED -- -NO CONTROL EQUIPMENT SIC= 0 -TOTAL RECS = 10

```
TEMP RANGE      COUNT
                           ----------------------------------------------------------------------------------------------------
   0.- 100.    .0          !
 101.- 200.    .0          !
 201.- 300.    .0          !
 301.- 400.    .0          !
 401.- 500.    .0          !
 501.- 600.    .281E 12    !HH
 601.- 700.    .333E 12    !HHH
 701.- 800.    .152E 13    !HHHHHHHHHHHHHHHH
 801.- 900.    .0          !
 901.-1000.    .0          !
1001.-1100.    .0          !
1101.-1200.    .423E 12    !HHHH
1201.-1300.    .0          !
1301.-1400.    .0          !
1401.-1500.    .0          !
1501.-1600.    .0          !
1601.-1700.    .0          !
1701.-1800.    .0          !
1801.-1900.    .0          !
1901.-2000.    .0          !
2001.-2100.    .0          !
2101.-2200.    .0          !
2201.-2300.    .0          !
2301.-2400.    .0          !
2401.-2500.    .0          !
2501.-2600.    .0          !
2601.-2700.    .0          !
2701.-2800.    .0          !
2801.-2900.    .0          !
2901.-3000.    .0          !
                           0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500605--CEMENT MANUF KILNS-COAL FIRED -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 42

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .611E 12 | .456E 12 | .224E 12 | .0 | .0 | .0 |
| 201.- 300. | .283E 13 | .215E 13 | .869E 12 | .0 | .0 | .0 |
| 301.- 400. | .126E 14 | .977E 13 | .308E 13 | .796E 12 | .756E 12 | .346E 12 |
| 401.- 500. | .767E 13 | .606E 13 | .322E 13 | .953E 12 | .905E 12 | .711E 12 |
| 501.- 600. | .541E 13 | .435E 13 | .276E 13 | .108E 13 | .102E 13 | .937E 12 |
| 601.- 700. | .213E 13 | .173E 13 | .114E 13 | .547E 12 | .520E 12 | .475E 12 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .312E 14 | .245E 14 | .113E 14 | .338E 13 | .320E 13 | .247E 13 |

SCC = 30500605--CEMENT MANUFKILNS-COAL FIRED -WITH CONTROL EQUIPMENT -TOT RECS = 42

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .305E 14 | .239E 14 | .110E 14 | .332E 13 | .315E 13 | .242E 13 |
| 99 | .738E 12 | .576E 12 | .336E 12 | .576E 11 | .547E 11 | .501E 11 |
| | .312E 14 | .245E 14 | .113E 14 | .338E 13 | .320E 13 | .247E 13 |

CC =30500605--CEMENT MANUF KILNS-COAL FIRED ---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 42

```
TEMP RANGE    COUNT
                      ------------------------------------------------------------------------------------------------------
   0.- 100.   .0        !
 101.- 200.   .456E 12  !HHHH
 201.- 300.   .215E 13  !HHHHHHHHHHHHHHHHHHHHHH
 301.- 400.   .977E 13  !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 401.- 500.   .606E 13  !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 501.- 600.   .435E 13  !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 601.- 700.   .173E 13  !HHHHHHHHHHHHHHHHH
 701.- 800.   .0        !
 801.- 900.   .0        !
 901.-1000.   .0        !
1001.-1100.   .0        !
1101.-1200.   .0        !
1201.-1300.   .0        !
1301.-1400.   .0        !
1401.-1500.   .0        !
1501.-1600.   .0        !
1601.-1700.   .0        !
1701.-1800.   .0        !
1801.-1900.   .0        !
1901.-2000.   .0        !
2001.-2100.   .0        !
2101.-2200.   .0        !
2201.-2300.   .0        !
2301.-2400.   .0        !
2401.-2500.   .0        !
2501.-2600.   .0        !
2601.-2700.   .0        !
2701.-2800.   .0        !
2801.-2900.   .0        !
2901.-3000.   .0        !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500605--CEMENT MANUF KILNS-COAL FIRED -TOTAL SCC -SIC = 0 -TOT RECS = 52

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .611E 12 | .456E 12 | .224E 12 | .0 | .0 | .0 |
| 201.- 300. | .283E 13 | .215E 13 | .869E 12 | .0 | .0 | .0 |
| 301.- 400. | .126E 14 | .977E 13 | .308E 13 | .796E 12 | .756E 12 | .346E 12 |
| 401.- 500. | .767E 13 | .606E 13 | .322E 13 | .953E 12 | .905E 12 | .711E 12 |
| 501.- 600. | .576E 13 | .463E 13 | .294E 13 | .116E 13 | .110E 13 | .101E 13 |
| 601.- 700. | .253E 13 | .207E 13 | .136E 13 | .662E 12 | .629E 12 | .575E 12 |
| 701.- 800. | .184E 13 | .152E 13 | .0 | .609E 12 | .579E 12 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .495E 12 | .423E 12 | .312E 12 | .233E 12 | .222E 12 | .202E 12 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .343E 14 | .271E 14 | .120E 14 | .441E 13 | .419E 13 | .284E 13 |

SCC = 30500605--CEMENT MANUFKILNS-COAL FIRED -TOTAL SCC -TOT RECS = 52

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .336E 14 | .265E 14 | .117E 14 | .435E 13 | .414E 13 | .279E 13 |
| 99 | .738E 12 | .576E 12 | .336E 12 | .576E 11 | .547E 11 | .501E 11 |
| | .343E 14 | .271E 14 | .120E 14 | .441E 13 | .419E 13 | .284E 13 |

CC 30500605--CEMENT MANUF KILNS-COAL FIRED --TOTAL SCC -SIC = 0 -TOT RECS = 52

| EMP RANGE | COUNT |
|---|---|
| 0.- 100. | .0 |
| 101.- 200. | .456E 12 |
| 201.- 300. | .215E 13 |
| 301.- 400. | .977E 13 |
| 401.- 500. | .606E 13 |
| 501.- 600. | .463E 13 |
| 601.- 700. | .207E 13 |
| 701.- 800. | .152E 13 |
| 801.- 900. | .0 |
| 901.-1000. | .0 |
| 1001.-1100. | .0 |
| 1101.-1200. | .423E 12 |
| 1201.-1300. | .0 |
| 1301.-1400. | .0 |
| 1401.-1500. | .0 |
| 1501.-1600. | .0 |
| 1601.-1700. | .0 |
| 1701.-1800. | .0 |
| 1801.-1900. | .0 |
| 1901.-2000. | .0 |
| 2001.-2100. | .0 |
| 2101.-2200. | .0 |
| 2201.-2300. | .0 |
| 2301.-2400. | .0 |
| 2401.-2500. | .0 |
| 2501.-2600. | .0 |
| 2601.-2700. | .0 |
| 2701.-2800. | .0 |
| 2801.-2900. | .0 |
| 2901.-3000. | .0 |

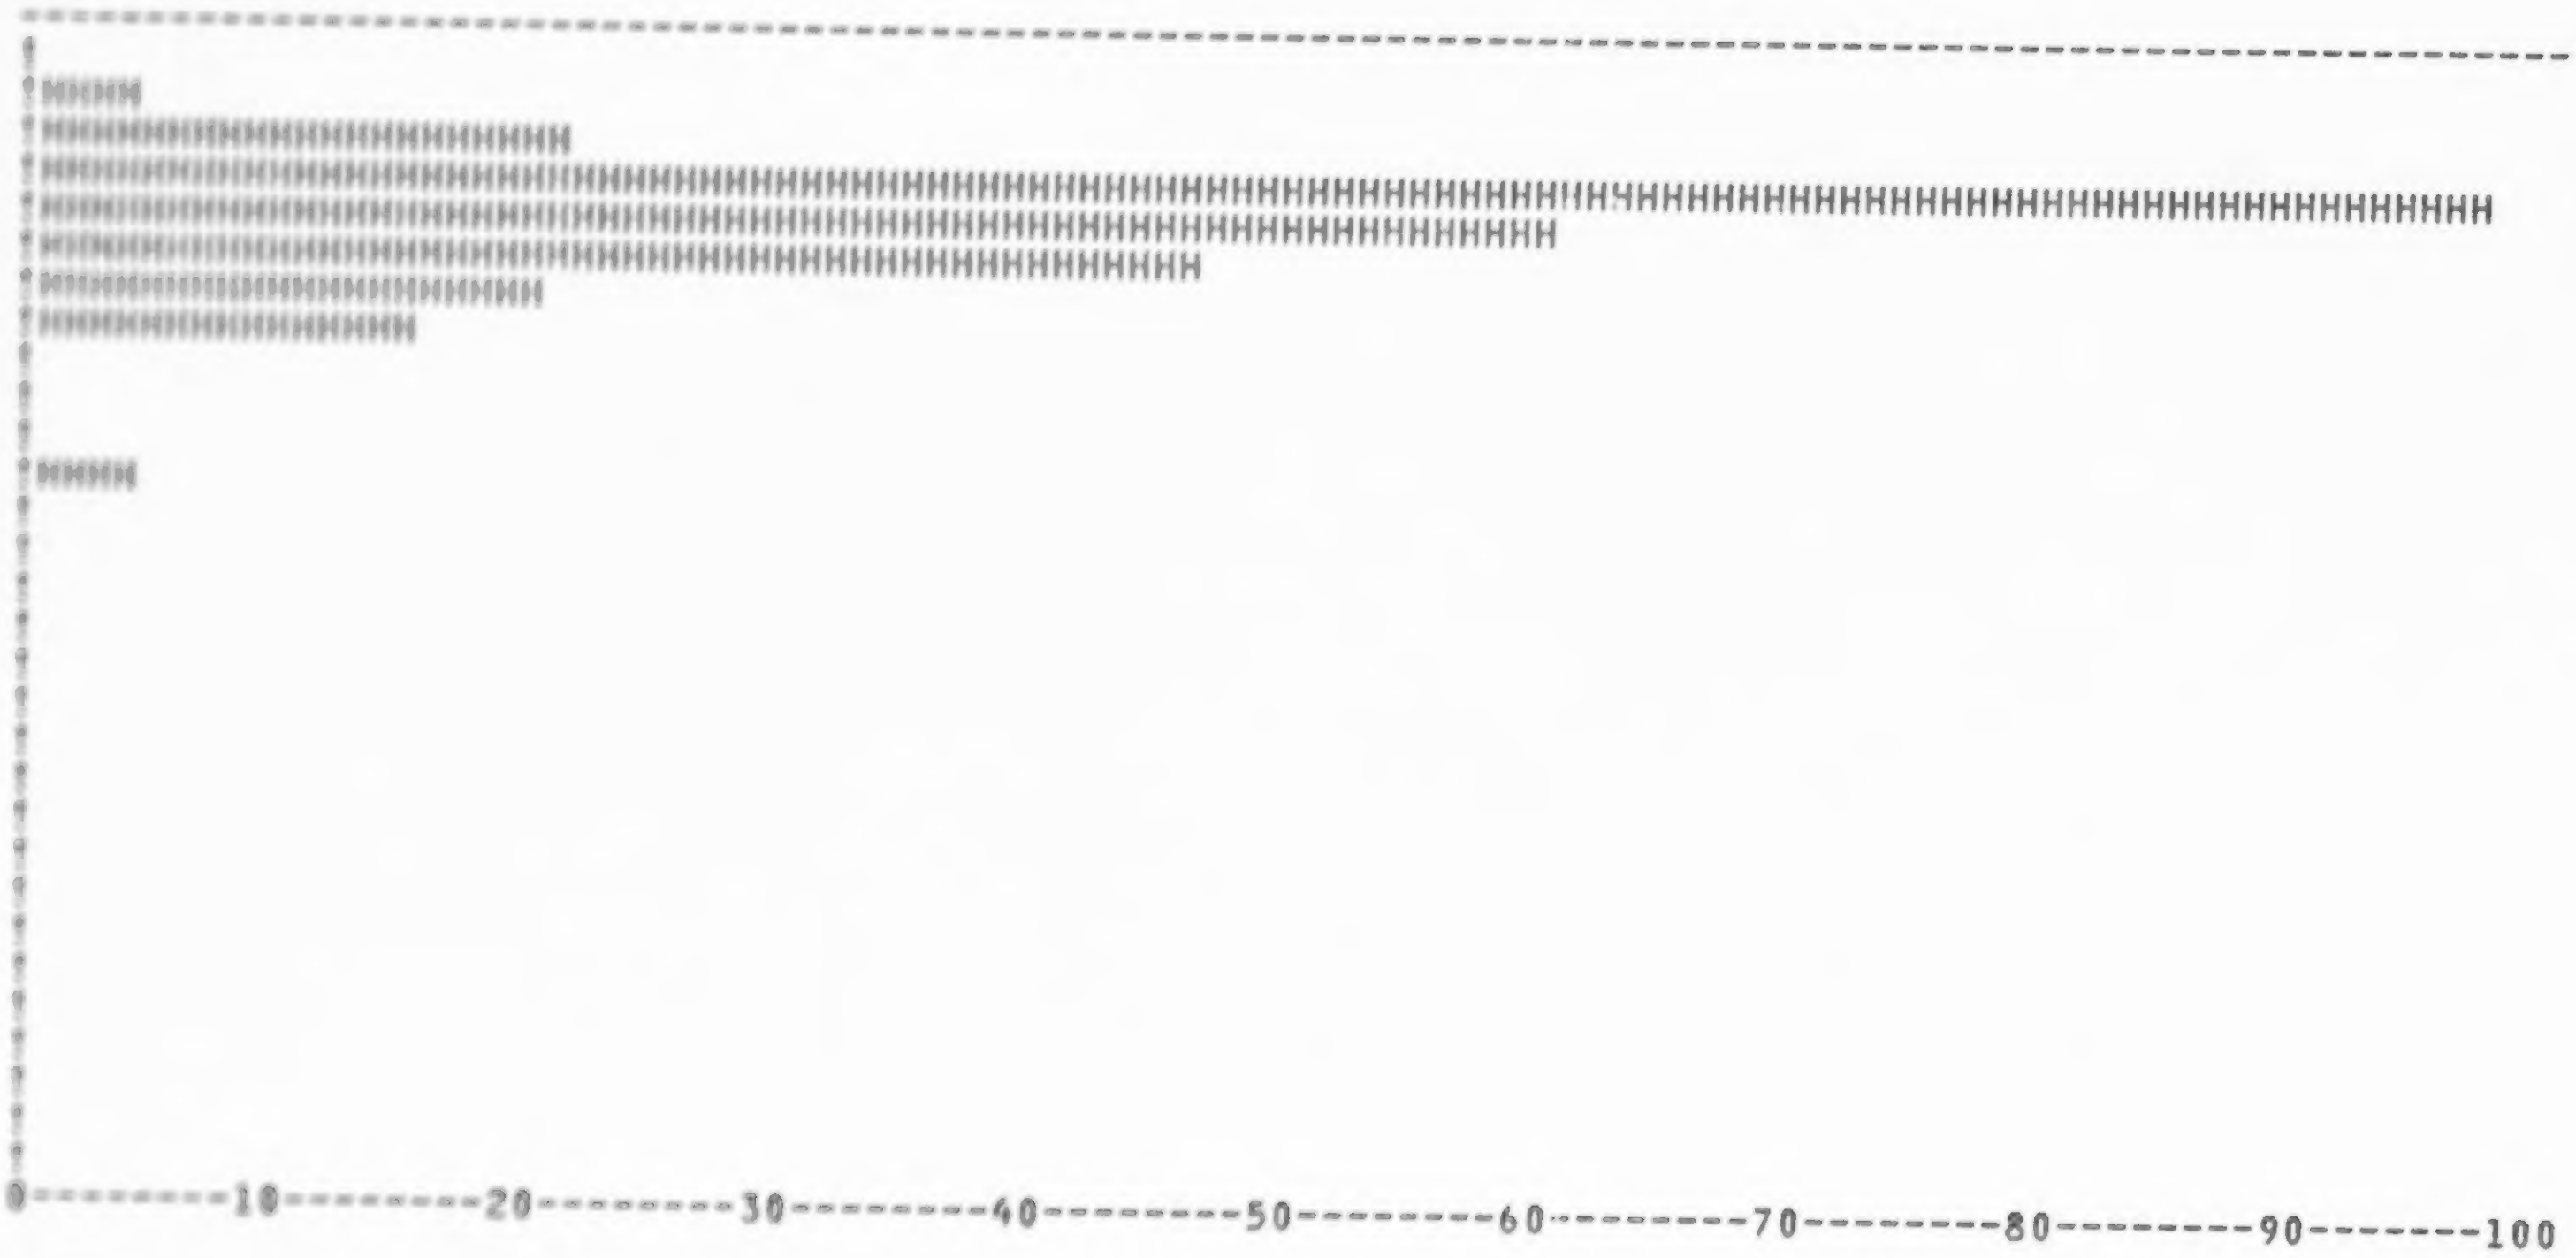

SCC= 30500699--CEMENT MANUF OTHER/NOT CLASSIFIED -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 55

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.= 100. | .375E 11 | .352E 11 | .0 | .0 | .0 | .0 |
| 101.= 200. | .164E 11 | .123E 11 | .0 | .0 | .0 | .0 |
| 201.= 300. | .649E 11 | .490E 11 | .186E 11 | .0 | .0 | .0 |
| 301.= 400. | .213E 11 | .166E 11 | .965E 10 | .158E 10 | .150E 10 | .137E 10 |
| 401.= 500. | .667E 12 | .525E 12 | .0 | .752E 11 | .714E 11 | .0 |
| 501.= 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.= 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.= 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.= 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.=1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.=1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.=1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.=1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.=1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.=1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.=1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.=1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.=1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.=1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.=2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.=2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.=2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.=2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.=2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.=2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.=2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.=2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.=2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.=2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.=3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .886E 12 | .639E 12 | .283E 11 | .768E 11 | .729E 11 | .137E 10 |

```
SCC = 30500699--CEMENT MANUFOTHER/NOT CLASSIFIED -NO CONTROL EQUIPMENT -TOT RECS =      55

SIC          MAXIMUM     EXPECTED     MINIMUM     MAXIMUM    EXPECTED     MINIMUM
              60 DEG      60 DEG       60 DEG     300 DEG     300 DEG     300 DEG
   32        .764E 12    .621E 12    .283E 11    .743E 11    .705E 11    .137E 10
   99        .222E 11    .175E 11    .0          .251E 10    .238E 10    .0

             .806E 12    .639E 12    .283E 11    .768E 11    .729E 11    .137E 10

CC = 30500699--CEMENT MANUF OTHER/NOT CLASSIFIED--  -NO CONTROL EQUIPMENT  -SIC=     0 -TOTAL RECS =      55

TEMP RANGE    COUNT

                          ----------------------------------------------------------------------------------------------------
    0.= 100.  .352E 11    !H
  101.= 200.  .123E 11    !H
  201.= 300.  .490E 11    !H
  301.= 400.  .166E 11    !H
  401.= 500.  .525E 12    !HHHHHH
  501.= 600.  .0          !
  601.= 700.  .0          !
  701.= 800.  .0          !
  801.= 900.  .0          !
  901.=1000.  .0          !
 1001.=1100.  .0          !
 1101.=1200.  .0          !
 1201.=1300.  .0          !
 1301.=1400.  .0          !
 1401.=1500.  .0          !
 1501.=1600.  .0          !
 1601.=1700.  .0          !
 1701.=1800.  .0          !
 1801.=1900.  .0          !
 1901.=2000.  .0          !
 2001.=2100.  .0          !
 2101.=2200.  .0          !
 2201.=2300.  .0          !
 2301.=2400.  .0          !
 2401.=2500.  .0          !
 2501.=2600.  .0          !
 2601.=2700.  .0          !
 2701.=2800.  .0          !
 2801.=2900.  .0          !
 2901.=3000.  .0          !
                          0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500699--CEMENT MANUF OTHER/NOT CLASSIFIED -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 303

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .554E 13 | .520E 13 | .785E 12 | .0 | .0 | .0 |
| 101.- 200. | .554E 13 | .430E 13 | .205E 13 | .0 | .0 | .0 |
| 201.- 300. | .550E 13 | .417E 13 | .214E 13 | .0 | .0 | .0 |
| 301.- 400. | .256E 13 | .198E 13 | .112E 13 | .103E 12 | .977E 11 | .893E 11 |
| 401.- 500. | .250E 12 | .198E 12 | .122E 12 | .375E 11 | .356E 11 | .326E 11 |
| 501.- 600. | .156E 12 | .125E 12 | .0 | .300E 11 | .285E 11 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .196E 14 | .160E 14 | .622E 13 | .170E 12 | .162E 12 | .122E 12 |

SCC = 30500699--CEMENT MANUFOTHER/NOT CLASSIFIED -WITH CONTROL EQUIPMENT -TOT RECS = 303

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| [illegible] | .442E 10 | .345E 10 | .201E 10 | .329E 09 | .312E 09 | .285E 09 |
| [illegible] | .138E 11 | .122E 11 | .615E 10 | .0 | .0 | .0 |
| [illegible] | .186E 14 | .151E 14 | .581E 13 | .170E 12 | .161E 12 | .122E 12 |
| [illegible] | .117E 12 | .978E 11 | .272E 11 | .0 | .0 | .0 |
| [illegible] | .987E 11 | .923E 11 | .626E 09 | .0 | .0 | .0 |
| 99 | .762E 12 | .696E 12 | .378E 12 | .0 | .0 | .0 |
| | .196E 14 | .160E 14 | .622E 13 | .170E 12 | .162E 12 | .122E 12 |

SCC =30500699--CEMENT MANUF OTHER/NOT CLASSIFIED---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 303

| TEMP RANGE | COUNT |
|---|---|
| 0.- 100. | .520E 13 |
| 101.- 200. | .620E 13 |
| 201.- 300. | .617E 13 |
| 301.- 400. | .198E 13 |
| 401.- 500. | .195E 12 |
| 501.- 600. | .125E 12 |
| 601.- 700. | .0 |
| 701.- 800. | .0 |
| 801.- 900. | .0 |
| 901.-1000. | .0 |
| 1001.-1100. | .0 |
| 1101.-1200. | .0 |
| 1201.-1300. | .0 |
| 1301.-1400. | .0 |
| 1401.-1500. | .0 |
| 1501.-1600. | .0 |
| 1601.-1700. | .0 |
| 1701.-1800. | .0 |
| 1801.-1900. | .0 |
| 1901.-2000. | .0 |
| 2001.-2100. | .0 |
| 2101.-2200. | .0 |
| 2201.-2300. | .0 |
| 2301.-2400. | .0 |
| 2401.-2500. | .0 |
| 2501.-2600. | .0 |
| 2601.-2700. | .0 |
| 2701.-2800. | .0 |
| 2801.-2900. | .0 |
| 2901.-3000. | .0 |

SCC= 30500699--CEMENT MANUF OTHER/NOT CLASSIFIED -TOTAL SCC -SIC = 0 -TOT RECS = 358

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.= 100. | .558E 13 | .523E 13 | .785E 12 | .0 | .0 | .0 |
| 101.= 200. | .556E 13 | .431E 13 | .205E 13 | .0 | .0 | .0 |
| 201.= 300. | .556E 13 | .422E 13 | .216E 13 | .0 | .0 | .0 |
| 301.= 400. | .258E 13 | .200E 13 | .113E 13 | .104E 12 | .992E 11 | .907E 11 |
| 401.= 500. | .917E 12 | .724E 12 | .122E 12 | .113E 12 | .107E 12 | .326E 11 |
| 501.= 600. | .156E 12 | .125E 12 | .0 | .300E 11 | .285E 11 | .0 |
| 601.= 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.= 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.= 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.=1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.=1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.=1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.=1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.=1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.=1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.=1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.=1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.=1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.=1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.=2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.=2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.=2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.=2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.=2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.=2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.=2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.=2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.=2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.=2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.=3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .284E 14 | .166E 14 | .625E 13 | .247E 12 | .235E 12 | .123E 12 |

SCC = 30500699--CEMENT MANUFOTHER/NOT CLASSIFIED -TOTAL SCC -TOT RECS = 358

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 20 | .442E 10 | .345E 10 | .201E 10 | .329E 09 | .312E 09 | .285E 09 |
| 29 | .116E 11 | .122E 11 | .615E 10 | .0 | .0 | .0 |
| 32 | .193E 14 | .157E 14 | .584E 13 | .244E 12 | .232E 12 | .123E 12 |
| 35 | .117E 12 | .978E 11 | .272E 11 | .0 | .0 | .0 |
| 50 | .587E 11 | .925E 11 | .626E 09 | .0 | .0 | .0 |
| 99 | .784E 12 | .713E 12 | .378E 12 | .251E 10 | .238E 10 | .0 |
| | .204E 14 | .166E 14 | .625E 13 | .247E 12 | .235E 12 | .123E 12 |

CE 30500699--CEMENT MANUF OTHER/NOT CLASSIFIED--TOTAL SCC -SIC = 0 -TOT RECS = 358

| EMP RANGE | COUNT |
|---|---|
| 0.- 100. | .521E 13 |
| 101.- 200. | .431E 13 |
| 201.- 300. | .422E 13 |
| 301.- 400. | .200E 13 |
| 401.- 500. | .724E 12 |
| 501.- 600. | .125E 12 |
| 601.- 700. | .0 |
| 701.- 800. | .0 |
| 801.- 900. | .0 |
| 901.-1000. | .0 |
| 1001.-1100. | .0 |
| 1101.-1200. | .0 |
| 1201.-1300. | .0 |
| 1301.-1400. | .0 |
| 1401.-1500. | .0 |
| 1501.-1600. | .0 |
| 1601.-1700. | .0 |
| 1701.-1800. | .0 |
| 1801.-1900. | .0 |
| 1901.-2000. | .0 |
| 2001.-2100. | .0 |
| 2101.-2200. | .0 |
| 2201.-2300. | .0 |
| 2301.-2400. | .0 |
| 2401.-2500. | .0 |
| 2501.-2600. | .0 |
| 2601.-2700. | .0 |
| 2701.-2800. | .0 |
| 2801.-2900. | .0 |
| 2901.-3000. | .0 |

SCC= 30500701--CEMENT MANUF KILNS -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 5

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .255E 13 | .197E 13 | .654E 12 | .725E 11 | .688E 11 | .300E 11 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .255E 13 | .197E 13 | .654E 12 | .725E 11 | .688E 11 | .300E 11 |

SCC = 30500701--CEMENT MANUFKILNS -NO CONTROL EQUIPMENT -TOT RECS = 5

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .255E 13 | .197E 13 | .654E 12 | .725E 11 | .688E 11 | .300E 11 |
| | .255E 13 | .197E 13 | .654E 12 | .725E 11 | .688E 11 | .300E 11 |

CC = 30500701--CEMENT MANUF KILNS -- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 5

```
TEMP RANGE   COUNT
                        ------------------------------------------------------------------------------------------------------
   0.- 100.   .0        !
 101.- 200.   .0        !
 201.- 300.   .0        !
 301.- 400.   .197E 13  !HHHHHHHHHHHHHHHHHHH
 401.- 500.   .0        !
 501.- 600.   .0        !
 601.- 700.   .0        !
 701.- 800.   .0        !
 801.- 900.   .0        !
 901.-1000.   .0        !
1001.-1100.   .0        !
1101.-1200.   .0        !
1201.-1300.   .0        !
1301.-1400.   .0        !
1401.-1500.   .0        !
1501.-1600.   .0        !
1601.-1700.   .0        !
1701.-1800.   .0        !
1801.-1900.   .0        !
1901.-2000.   .0        !
2001.-2100.   .0        !
2101.-2200.   .0        !
2201.-2300.   .0        !
2301.-2400.   .0        !
2401.-2500.   .0        !
2501.-2600.   .0        !
2601.-2700.   .0        !
2701.-2800.   .0        !
2801.-2900.   .0        !
2901.-3000.   .0        !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500701--CEMENT MANUF KILNS -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 48

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .295E 11 | .276E 11 | .225E 11 | .0 | .0 | .0 |
| 101.- 200. | .304E 13 | .280E 13 | .150E 13 | .0 | .0 | .0 |
| 201.- 300. | .332E 13 | .254E 13 | .419E 12 | .0 | .0 | .0 |
| 301.- 400. | .348E 14 | .269E 14 | .144E 13 | .136E 13 | .129E 13 | .172E 12 |
| 401.- 500. | .136E 14 | .108E 14 | .652E 13 | .176E 13 | .167E 13 | .153E 13 |
| 501.- 600. | .166E 13 | .134E 13 | .848E 12 | .332E 12 | .315E 12 | .289E 12 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .565E 14 | .444E 14 | .108E 14 | .345E 13 | .327E 13 | .199E 13 |

SCC = 30500701--CEMENT MANUFKILNS -WITH CONTROL EQUIPMENT -TOT RECS = 48

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 16 | .560E 10 | .418E 10 | .207E 10 | .0 | .0 | .0 |
| 29 | .154E 13 | .145E 13 | .711E 12 | .0 | .0 | .0 |
| 32 | .550E 14 | .430E 14 | .100E 14 | .345E 13 | .327E 13 | .199E 13 |
| | .565E 14 | .444E 14 | .108E 14 | .345E 13 | .327E 13 | .199E 13 |

CC =30500701--CEMENT MANUF KILNS ---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 48

| TEMP RANGE | COUNT |
|---|---|
| 0.- 100. | .276E 11 |
| 101.- 200. | .280E 13 |
| 201.- 300. | .254E 13 |
| 301.- 400. | .269E 14 |
| 401.- 500. | .108E 14 |
| 501.- 600. | .134E 13 |
| 601.- 700. | .0 |
| 701.- 800. | .0 |
| 801.- 900. | .0 |
| 901.-1000. | .0 |
| 1001.-1100. | .0 |
| 1101.-1200. | .0 |
| 1201.-1300. | .0 |
| 1301.-1400. | .0 |
| 1401.-1500. | .0 |
| 1501.-1600. | .0 |
| 1601.-1700. | .0 |
| 1701.-1800. | .0 |
| 1801.-1900. | .0 |
| 1901.-2000. | .0 |
| 2001.-2100. | .0 |
| 2101.-2200. | .0 |
| 2201.-2300. | .0 |
| 2301.-2400. | .0 |
| 2401.-2500. | .0 |
| 2501.-2600. | .0 |
| 2601.-2700. | .0 |
| 2701.-2800. | .0 |
| 2801.-2900. | .0 |
| 2901.-3000. | .0 |

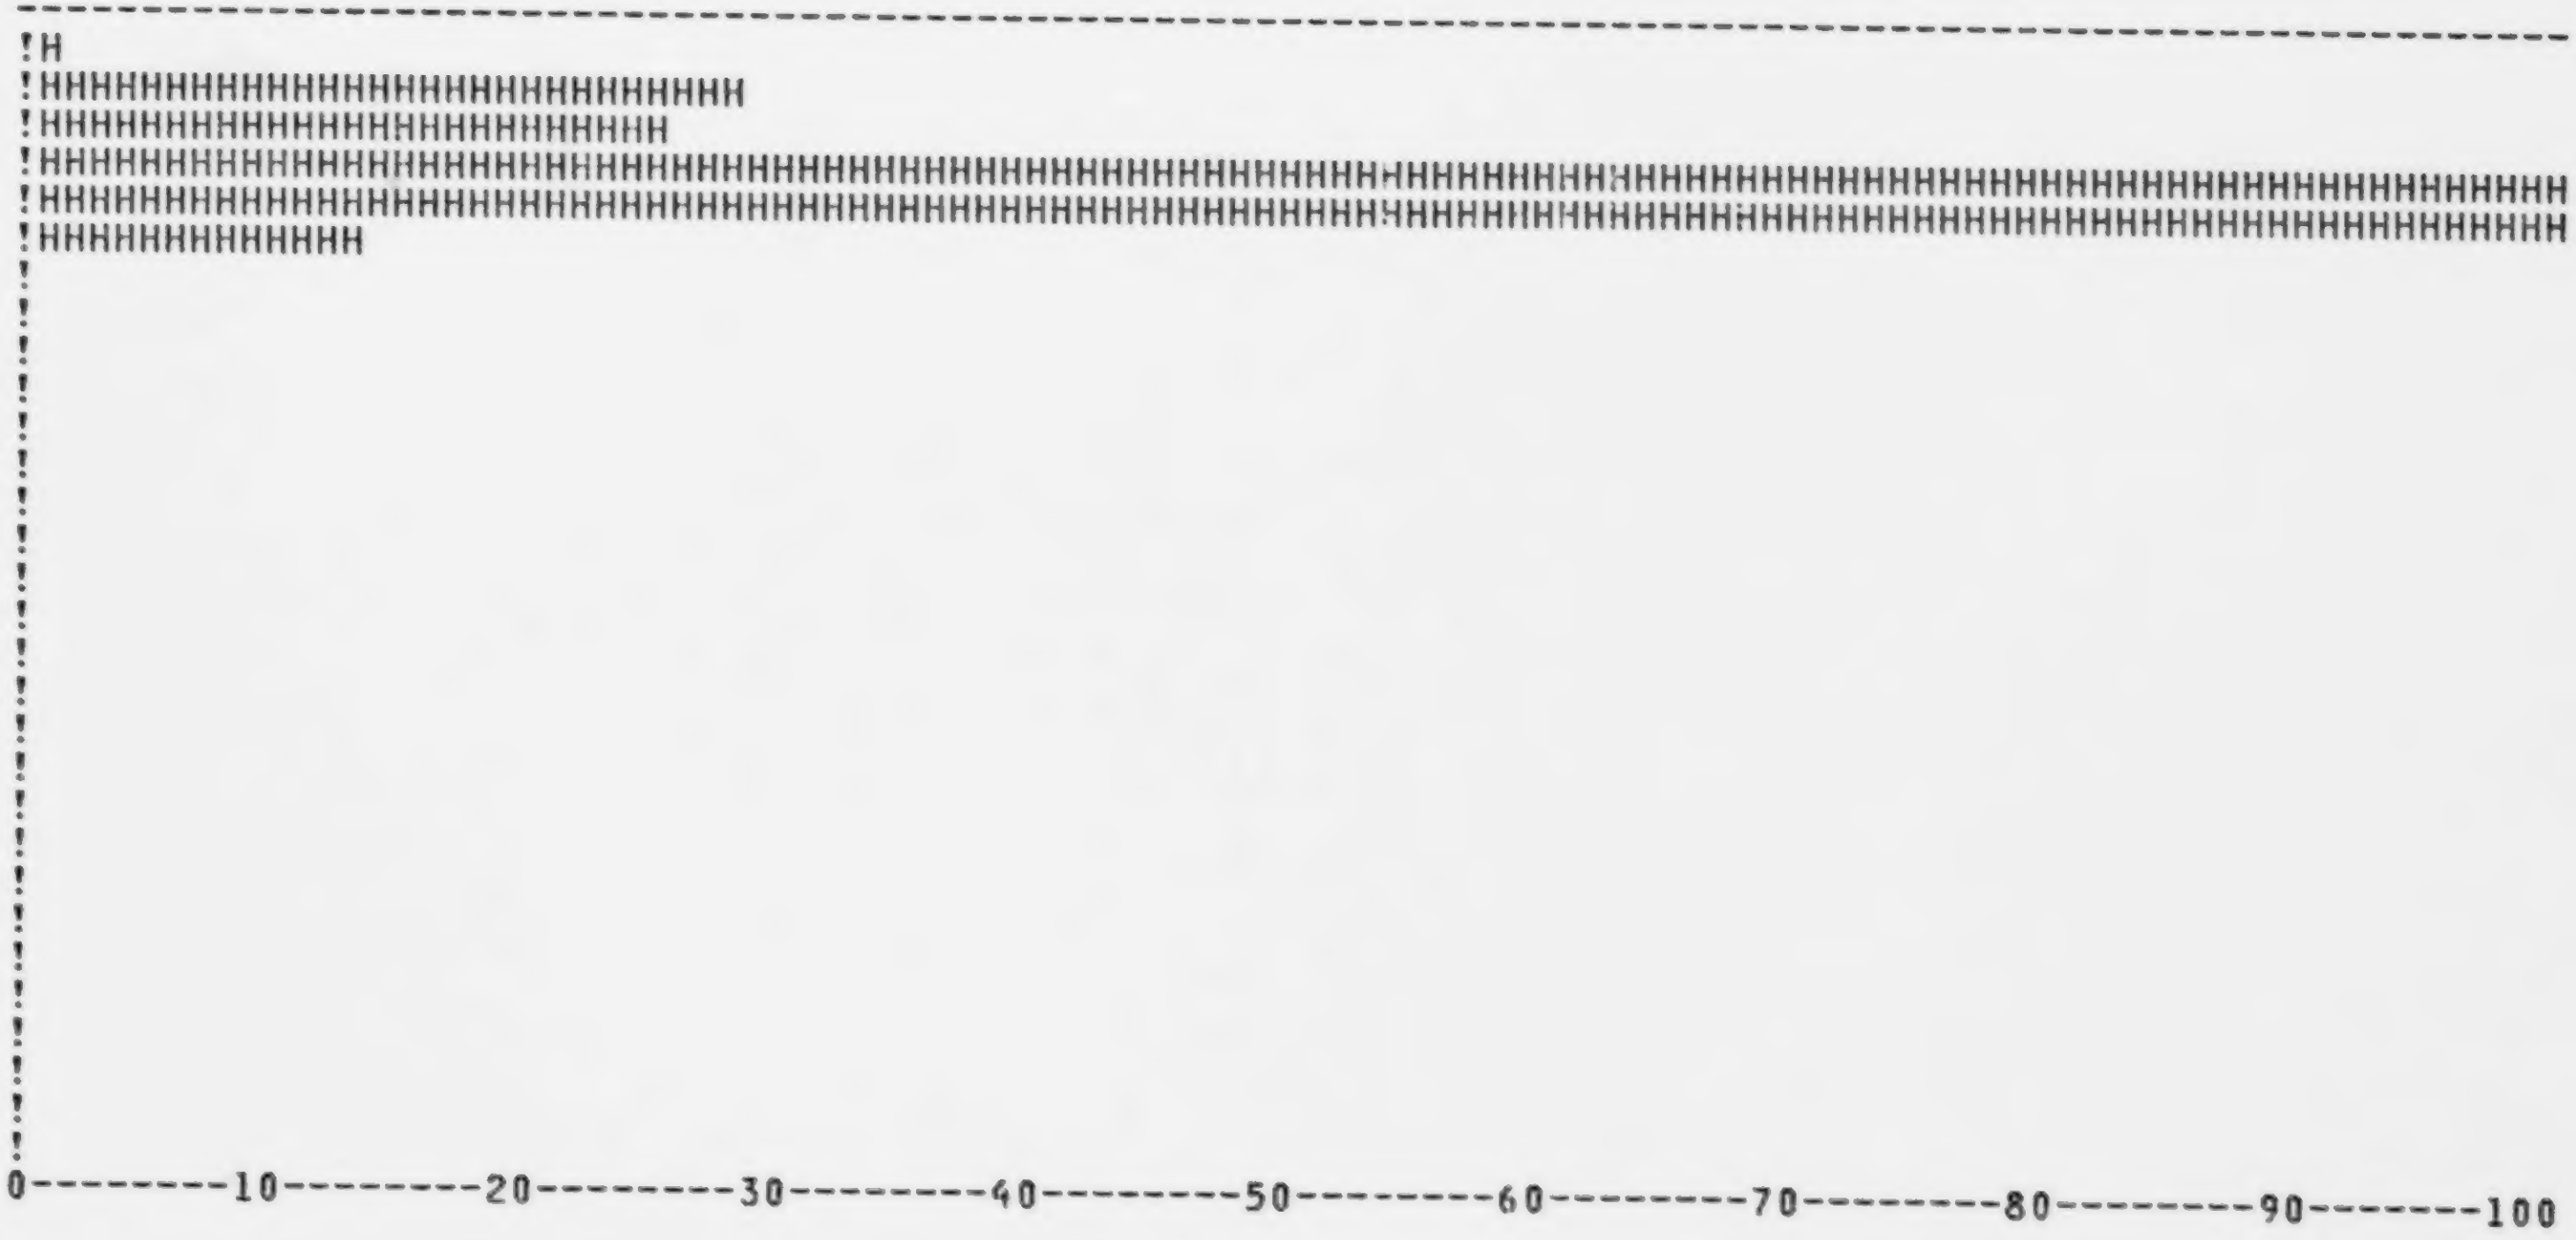

SCC= 30500701--CEMENT MANUF KILNS -TOTAL SCC -SIC = 0 -TOT RECS = 53

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .295E 11 | .276E 11 | .225E 11 | .0 | .0 | .0 |
| 101.- 200. | .304E 13 | .280E 13 | .150E 13 | .0 | .0 | .0 |
| 201.- 300. | .332E 13 | .254E 13 | .419E 12 | .0 | .0 | .0 |
| 301.- 400. | .374E 14 | .289E 14 | .209E 13 | .143E 13 | .136E 13 | .202E 12 |
| 401.- 500. | .136E 14 | .108E 14 | .652E 13 | .176E 13 | .167E 13 | .153E 13 |
| 501.- 600. | .166E 13 | .134E 13 | .848E 12 | .332E 12 | .315E 12 | .289E 12 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .591E 14 | .464E 14 | .114E 14 | .352E 13 | .334E 13 | .202E 13 |

SCC = 30500701--CEMENT MANUFKILNS -TOTAL SCC -TOT RECS = 53

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 16 | .560E 10 | .418E 10 | .207E 10 | .0 | .0 | .0 |
| 29 | .154E 13 | .145E 13 | .711E 12 | .0 | .0 | .0 |
| 32 | .575E 14 | .449E 14 | .107E 14 | .352E 13 | .334E 13 | .202E 13 |
| | .591E 14 | .464E 14 | .114E 14 | .352E 13 | .334E 13 | .202E 13 |

CC 30500701--CEMENT MANUF KILNS --TOTAL SCC -SIC = 0 -TOT RECS = 53

```
EMP RANGE   COUNT

                         ----------------------------------------------------------------------------------------------------
   0.- 100.  .276E 11   !H
 101.- 200.  .280E 13   !HHHHHHHHHHHHHHHHHHHHHHHHHHHH
 201.- 300.  .254E 13   !HHHHHHHHHHHHHHHHHHHHHHHHH
 301.- 400.  .289E 14   !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 401.- 500.  .108E 14   !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 501.- 600.  .134E 13   !HHHHHHHHHHHHH
 601.- 700.  .0         !
 701.- 800.  .0         !
 801.- 900.  .0         !
 901.-1000.  .0         !
1001.-1100.  .0         !
1101.-1200.  .0         !
1201.-1300.  .0         !
1301.-1400.  .0         !
1401.-1500.  .0         !
1501.-1600.  .0         !
1601.-1700.  .0         !
1701.-1800.  .0         !
1801.-1900.  .0         !
1901.-2000.  .0         !
2001.-2100.  .0         !
2101.-2200.  .0         !
2201.-2300.  .0         !
2301.-2400.  .0         !
2401.-2500.  .0         !
2501.-2600.  .0         !
2601.-2700.  .0         !
2701.-2800.  .0         !
2801.-2900.  .0         !
2901.-3000.  .0         !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500702--CEMENT MANUF DRIERS AND GRINDERS, -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 6

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .208E 11 | .195E 11 | .0 | .0 | .0 | .0 |
| 101.- 200. | .786E 12 | .590E 12 | .216E 12 | .0 | .0 | .0 |
| 201.- 300. | .188E 12 | .141E 12 | .716E 11 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .995E 12 | .751E 12 | .288E 12 | .0 | .0 | .0 |

SCC = 30500702--CEMENT MANUFDRIERS AND GRINDERS, -NO CONTROL EQUIPMENT -TOT RECS = 6

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .995E 12 | .751E 12 | .288E 12 | .0 | .0 | .0 |
| | .995E 12 | .751E 12 | .288E 12 | .0 | .0 | .0 |

CC = 30500702--CEMENT MANUF DRIERS AND GRINDERS,-- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 6

```
TEMP RANGE    COUNT

   0.- 100.  .195E 11  ---------------------------------------------------------------------------------------------------
 101.- 200.  .590E 12  !H
 201.- 300.  .141E 12  !HHHHH
 301.- 400.  .0        !H
 401.- 500.  .0        !
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500702--CEMENT MANUF DRIERS AND GRINDERS, -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 134

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .815E 12 | .764E 12 | .199E 12 | .0 | .0 | .0 |
| 101.- 200. | .333E 13 | .252E 13 | .108E 13 | .0 | .0 | .0 |
| 201.- 300. | .122E 13 | .929E 12 | .493E 12 | .0 | .0 | .0 |
| 301.- 400. | .415E 12 | .321E 12 | .180E 12 | .126E 11 | .119E 11 | .109E 11 |
| 401.- 500. | .307E 12 | .241E 12 | .143E 12 | .307E 11 | .292E 11 | .267E 11 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .609E 13 | .477E 13 | .210E 13 | .433E 11 | .411E 11 | .376E 11 |

SCC = 30500702--CEMENT MANUFDRIERS AND GRINDERS, -WITH CONTROL EQUIPMENT -TOT RECS = 134

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .602E 13 | .472E 13 | .207E 13 | .433E 11 | .411E 11 | .376E 11 |
| 35 | .570E 11 | .429E 11 | .210E 11 | .0 | .0 | .0 |
| 99 | .119E 11 | .112E 11 | .909E 10 | .0 | .0 | .0 |
| | .609E 13 | .477E 13 | .210E 13 | .433E 11 | .411E 11 | .376E 11 |

CC =30500702--CEMENT MANUF DRIERS AND GRINDERS,---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 134

```
TEMP RANGE   COUNT
                        -----------------------------------------------------------------------------------------------------
   0.- 100.  .764E 12  !HHHHHHHH
 101.- 200.  .252E 13  !HHHHHHHHHHHHHHHHHHHHHHHHHH
 201.- 300.  .929E 12  !HHHHHHHHH
 301.- 400.  .321E 12  !HHH
 401.- 500.  .241E 12  !HH
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500702--CEMENT MANUF DRIERS AND GRINDERS, -TOTAL SCC -SIC = 0 -TOT RECS = 140

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .835E 12 | .784E 12 | .199E 12 | .0 | .0 | .0 |
| 101.- 200. | .411E 13 | .311E 13 | .130E 13 | .0 | .0 | .0 |
| 201.- 300. | .141E 13 | .107E 13 | .564E 12 | .0 | .0 | .0 |
| 301.- 400. | .415E 12 | .321E 12 | .180E 12 | .126E 11 | .119E 11 | .109E 11 |
| 401.- 500. | .307E 12 | .241E 12 | .143E 12 | .307E 11 | .292E 11 | .267E 11 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .708E 13 | .552E 13 | .239E 13 | .433E 11 | .411E 11 | .376E 11 |

SCC = 30500702--CEMENT MANUFDRIERS AND GRINDERS, -TOTAL SCC -TOT RECS = 140

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .701E 13 | .547E 13 | .236E 13 | .433E 11 | .411E 11 | .376E 11 |
| 35 | .570E 11 | .429E 11 | .210E 11 | .0 | .0 | .0 |
| 99 | .119E 11 | .112E 11 | .909E 10 | .0 | .0 | .0 |
| | .708E 13 | .552E 13 | .239E 13 | .433E 11 | .411E 11 | .376E 11 |

CC 30500702--CEMENT MANUF DRIERS AND GRINDERS,--TOTAL SCC -SIC = 0 -TOT RECS = 140

```
EMP RANGE    COUNT

                        -----------------------------------------------------------------------------------------------------
   0.- 100.  .784E 12  !HHHHHHH
 101.- 200.  .311E 13  !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 201.- 300.  .107E 13  !HHHHHHHHHH
 301.- 400.  .321E 12  !HHH
 401.- 500.  .241E 12  !HH
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500703--CEMENT MANUF KILNS-OIL FIRED -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 2

| | | | | | | |
|---|---|---|---|---|---|---|
| TEMP | MAXIMUM | EXPECTED | MINIMUM | MAXIMUM | EXPECTED | MINIMUM |
| | 60 DEG | 60 DEG | 60 DEG | 300 DEG | 300 DEG | 300 DEG |

0 RECORDS FOR THIS SECTION OF SCC

SCC = 30500703--CEMENT MANUFKILNS-OIL FIRED -NO CONTROL EQUIPMENT -TOT RECS = 2

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|

SCC= 30500703--CEMENT MANUF KILNS-OIL FIRED -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 36

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .248E 13 | .188E 13 | .990E 12 | .0 | .0 | .0 |
| 301.- 400. | .115E 14 | .893E 13 | .411E 13 | .554E 12 | .526E 12 | .342E 12 |
| 401.- 500. | .893E 13 | .708E 13 | .432E 13 | .125E 13 | .119E 13 | .109E 13 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .229E 14 | .179E 14 | .942E 13 | .180E 13 | .171E 13 | .143E 13 |

SCC = 30500703--CEMENT MANUFKILNS-OIL FIRED -WITH CONTROL EQUIPMENT -TOT RECS = 36

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .229E 14 | .179E 14 | .942E 13 | .180E 13 | .171E 13 | .143E 13 |
| | .229E 14 | .179E 14 | .942E 13 | .180E 13 | .171E 13 | .143E 13 |

CC =30500703--CEMENT MANUF KILNS-OIL FIRED ---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 36

| TEMP RANGE | COUNT |
|---|---|
| 0.- 100. | .0 |
| 101.- 200. | .0 |
| 201.- 300. | .188E 13 |
| 301.- 400. | .893E 13 |
| 401.- 500. | .708E 13 |
| 501.- 600. | .0 |
| 601.- 700. | .0 |
| 701.- 800. | .0 |
| 801.- 900. | .0 |
| 901.-1000. | .0 |
| 1001.-1100. | .0 |
| 1101.-1200. | .0 |
| 1201.-1300. | .0 |
| 1301.-1400. | .0 |
| 1401.-1500. | .0 |
| 1501.-1600. | .0 |
| 1601.-1700. | .0 |
| 1701.-1800. | .0 |
| 1801.-1900. | .0 |
| 1901.-2000. | .0 |
| 2001.-2100. | .0 |
| 2101.-2200. | .0 |
| 2201.-2300. | .0 |
| 2301.-2400. | .0 |
| 2401.-2500. | .0 |
| 2501.-2600. | .0 |
| 2601.-2700. | .0 |
| 2701.-2800. | .0 |
| 2801.-2900. | .0 |
| 2901.-3000. | .0 |

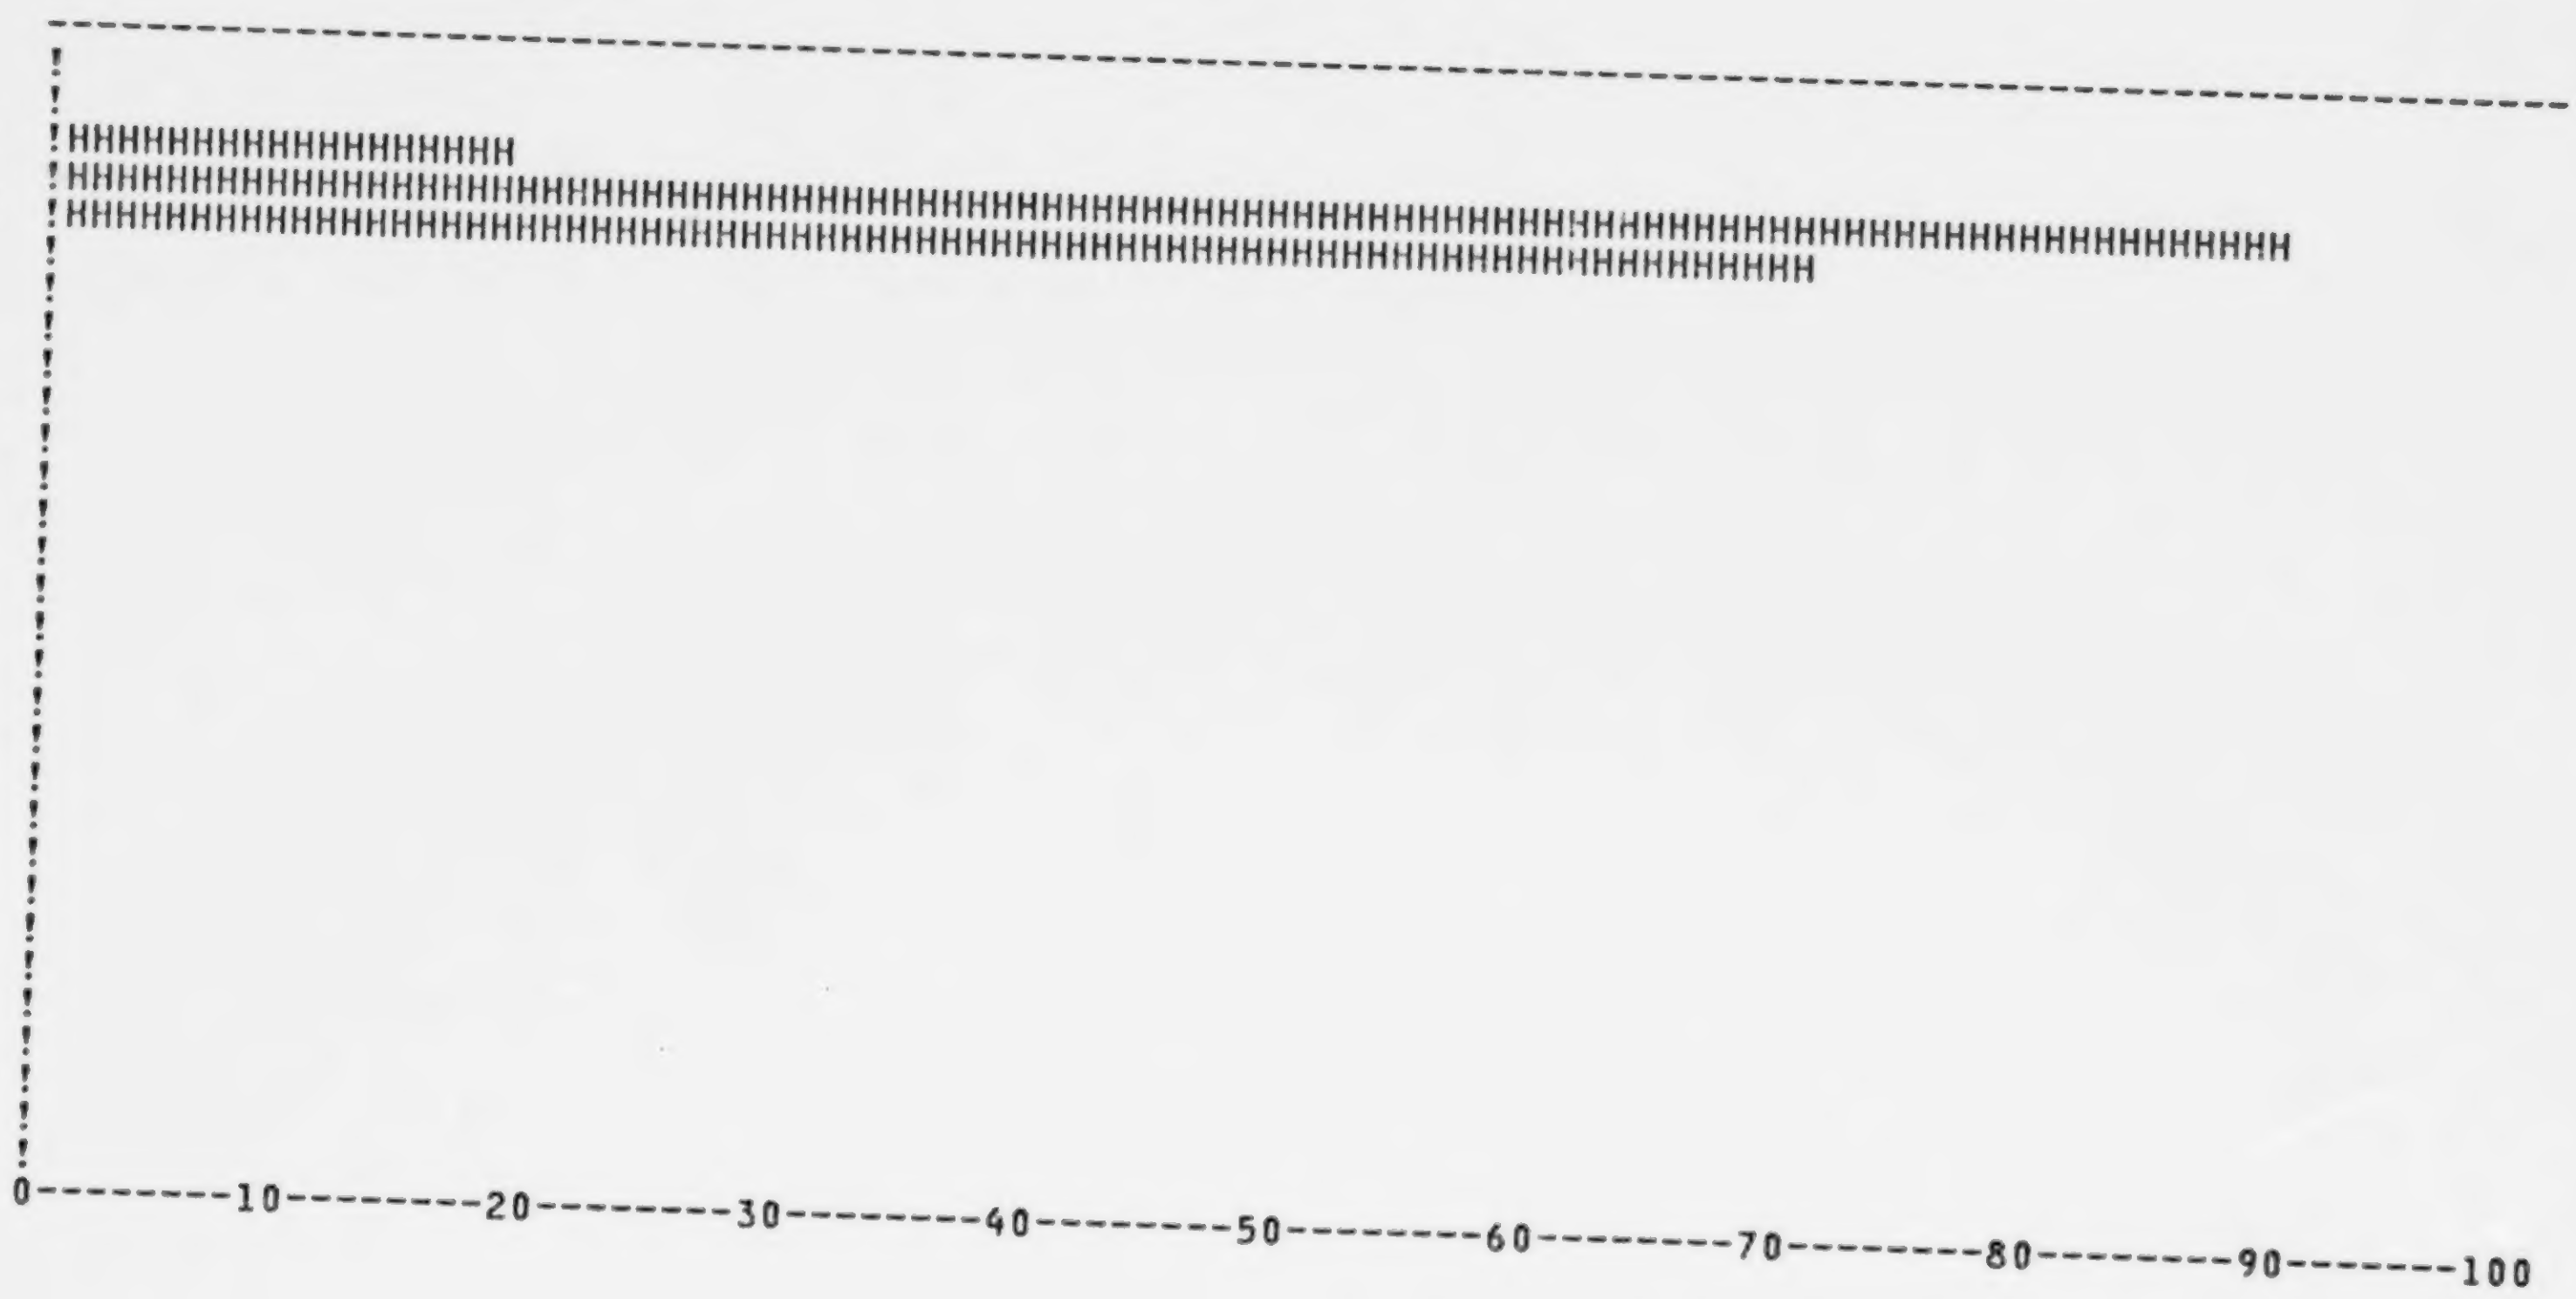

SCC= 30500704--CEMENT MANUF KILNS-GAS FIRED -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 6

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .133E 12 | .103E 12 | .574E 11 | .0 | .0 | .0 |
| 401.- 500. | .869E 12 | .690E 12 | .0 | .292E 10 | .278E 10 | .254E 10 |
| 501.- 600. | .728E 12 | .582E 12 | .363E 12 | .132E 12 | .125E 12 | .0 |
| 601.- 700. | .0 | .0 | .0 | .126E 12 | .120E 12 | .110E 12 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .173E 13 | .137E 13 | .420E 12 | .261E 12 | .248E 12 | .112E 12 |

SCC = 30500704--CEMENT MANUFKILNS-GAS FIRED -NO CONTROL EQUIPMENT -TOT RECS = 6

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .173E 13 | .137E 13 | .420E 12 | .261E 12 | .248E 12 | .112E 12 |
| | .173E 13 | .137E 13 | .420E 12 | .261E 12 | .248E 12 | .112E 12 |

CC = 30500704--CEMENT MANUF KILNS-GAS FIRED -- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 6

```
TEMP RANGE   COUNT
                       -----------------------------------------------------------------------------------------------
   0.- 100.   .0        !
 101.- 200.   .0        !
 201.- 300.   .0        !
 301.- 400.   .103E 12  !H
 401.- 500.   .690E 12  !HHHHHH
 501.- 600.   .582E 12  !HHHHH
 601.- 700.   .0        !
 701.- 800.   .0        !
 801.- 900.   .0        !
 901.-1000.   .0        !
1001.-1100.   .0        !
1101.-1200.   .0        !
1201.-1300.   .0        !
1301.-1400.   .0        !
1401.-1500.   .0        !
1501.-1600.   .0        !
1601.-1700.   .0        !
1701.-1800.   .0        !
1801.-1900.   .0        !
1901.-2000.   .0        !
2001.-2100.   .0        !
2101.-2200.   .0        !
2201.-2300.   .0        !
2301.-2400.   .0        !
2401.-2500.   .0        !
2501.-2600.   .0        !
2601.-2700.   .0        !
2701.-2800.   .0        !
2801.-2900.   .0        !
2901.-3000.   .0        !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500704--CEMENT MANUF KILNS-GAS FIRED -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 68

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .228E 12 | .214E 12 | .0 | .0 | .0 | .0 |
| 101.- 200. | .978E 12 | .736E 12 | .138E 12 | .0 | .0 | .0 |
| 201.- 300. | .528E 13 | .400E 13 | .103E 13 | .0 | .0 | .0 |
| 301.- 400. | .807E 13 | .625E 13 | .320E 13 | .336E 12 | .319E 12 | .254E 12 |
| 401.- 500. | .222E 14 | .174E 14 | .768E 13 | .240E 13 | .228E 13 | .152E 13 |
| 501.- 600. | .530E 13 | .424E 13 | .264E 13 | .912E 12 | .866E 12 | .792E 12 |
| 601.- 700. | .300E 13 | .245E 13 | .163E 13 | .817E 12 | .776E 12 | .710E 12 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .545E 12 | .453E 12 | .313E 12 | .187E 12 | .178E 12 | .162E 12 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .456E 14 | .358E 14 | .166E 14 | .465E 13 | .442E 13 | .344E 13 |

```
SCC = 30500704--CEMENT MANUFKILNS-GAS FIRED      -WITH CONTROL EQUIPMENT -TOT RECS =    68

SIC          MAXIMUM    EXPECTED   MINIMUM    MAXIMUM    EXPECTED    MINIMUM
             60 DEG     60 DEG      60 DEG      300DEG   300 DEG     300 DEG
   32       .456E 14   .358E 14   .166E 14   .465E 13   .442E 13   .344E 13


            .456E 14   .358E 14   .166E 14   .465E 13   .442E 13   .344E 13


CC =30500704--CEMENT MANUF KILNS-GAS FIRED     ---WITH CONTROL EQUIPMENT  -SIC=    0 -TOTAL RECS =     68

TEMP RANGE   COUNT

                       ----------------------------------------------------------------------------------------------------
   0.- 100.   .214E 12  !HH
 101.- 200.   .736E 12  !HHHHHHH
 201.- 300.   .400E 13  !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 301.- 400.   .625E 13  !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 401.- 500.   .174E 14  !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 501.- 600.   .424E 13  !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 601.- 700.   .245E 13  !HHHHHHHHHHHHHHHHHHHHHHHH
 701.- 800.   .0        !
 801.- 900.   .453E 12  !HHHH
 901.-1000.   .0        !
1001.-1100.   .0        !
1101.-1200.   .0        !
1201.-1300.   .0        !
1301.-1400.   .0        !
1401.-1500.   .0        !
1501.-1600.   .0        !
1601.-1700.   .0        !
1701.-1800.   .0        !
1801.-1900.   .0        !
1901.-2000.   .0        !
2001.-2100.   .0        !
2101.-2200.   .0        !
2201.-2300.   .0        !
2301.-2400.   .0        !
2401.-2500.   .0        !
2501.-2600.   .0        !
2601.-2700.   .0        !
2701.-2800.   .0        !
2801.-2900.   .0        !
2901.-3000.   .0        !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500704--CEMENT MANUF KILNS-GAS FIRED -TOTAL SCC -SIC = 0 -TOT RECS = 74

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .228E 12 | .214E 12 | .0 | .0 | .0 | .0 |
| 101.- 200. | .978E 12 | .736E 12 | .138E 12 | .0 | .0 | .0 |
| 201.- 300. | .528E 13 | .400E 13 | .103E 13 | .0 | .0 | .0 |
| 301.- 400. | .820E 13 | .635E 13 | .326E 13 | .339E 12 | .322E 12 | .256E 12 |
| 401.- 500. | .230E 14 | .181E 14 | .768E 13 | .253E 13 | .240E 13 | .152E 13 |
| 501.- 600. | .603E 13 | .482E 13 | .300E 13 | .104E 13 | .986E 12 | .902E 12 |
| 601.- 700. | .300E 13 | .245E 13 | .163E 13 | .817E 12 | .776E 12 | .710E 12 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .545E 12 | .453E 12 | .313E 12 | .187E 12 | .178E 12 | .162E 12 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .473E 14 | .371E 14 | .171E 14 | .491E 13 | .467E 13 | .355E 13 |

```
SCC = 30500704--CEMENT MANUFKILNS-GAS FIRED      -TOTAL SCC -TOT RECS =     74

SIC          MAXIMUM    EXPECTED    MINIMUM    MAXIMUM    EXPECTED    MINIMUM
             60 DEG     60 DEG      60 DEG     300 DEG    300 DEG     300 DEG
   32       .473E 14   .371E 14    .171E 14   .491E 13   .467E 13    .355E 13


            .473E 14   .371E 14    .171E 14   .491E 13   .467E 13    .355E 13


CC 30500704--CEMENT MANUF KILNS-GAS FIRED     --TOTAL SCC  -SIC =    0 -TOT RECS =     74

EMP RANGE    COUNT

                        ----------------------------------------------------------------------------------------------------
   0.- 100.  .214E 12   !HH
 101.- 200.  .736E 12   !HHHHHHH
 201.- 300.  .400E 13   !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 301.- 400.  .635E 13   !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 401.- 500.  .181E 14   !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 501.- 600.  .482E 13   !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 601.- 700.  .245E 13   !HHHHHHHHHHHHHHHHHHHHHHHH
 701.- 800.  .0         !
 801.- 900.  .453E 12   !HHHH
 901.-1000.  .0         !
1001.-1100.  .0         !
1101.-1200.  .0         !
1201.-1300.  .0         !
1301.-1400.  .0         !
1401.-1500.  .0         !
1501.-1600.  .0         !
1601.-1700.  .0         !
1701.-1800.  .0         !
1801.-1900.  .0         !
1901.-2000.  .0         !
2001.-2100.  .0         !
2101.-2200.  .0         !
2201.-2300.  .0         !
2301.-2400.  .0         !
2401.-2500.  .0         !
2501.-2600.  .0         !
2601.-2700.  .0         !
2701.-2800.  .0         !
2801.-2900.  .0         !
2901.-3000.  .0         !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500705--CEMENT MANUF KILNS-COAL FIRED -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 6

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .243E 13 | .186E 13 | .101E 13 | .0 | .0 | .0 |
| 301.- 400. | .324E 13 | .251E 13 | .142E 13 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .119E 12 | .113E 12 | .104E 12 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .568E 13 | .437E 13 | .243E 13 | .119E 12 | .113E 12 | .104E 12 |

```
SCC = 30500705--CEMENT MANUFKILNS-COAL FIRED     -NO CONTROL EQUIPMENT -TOT RECS =      6

SIC          MAXIMUM    EXPECTED    MINIMUM    MAXIMUM   EXPECTED    MINIMUM
              60 DEG     60 DEG      60 DEG    300 DEG    300 DEG    300 DEG
   32       .568E 13   .437E 13   .243E 13   .119E 12   .113E 12   .104E 12

            .568E 13   .437E 13   .243E 13   .119E 12   .113E 12   .104E 12


CC = 30500705--CEMENT MANUF KILNS-COAL FIRED    --  -NO CONTROL EQUIPMENT  -SIC=    0 -TOTAL RECS =      6

TEMP RANGE   COUNT
                         ----------------------------------------------------------------------------------------------------
   0.- 100.  .0          !
 101.- 200.  .0          !
 201.- 300.  .186E 13    !HHHHHHHHHHHHHHHHHHH
 301.- 400.  .251E 13    !HHHHHHHHHHHHHHHHHHHHHHHHHH
 401.- 500.  .0          !
 501.- 600.  .0          !
 601.- 700.  .0          !
 701.- 800.  .0          !
 801.- 900.  .0          !
 901.-1000.  .0          !
1001.-1100.  .0          !
1101.-1200.  .0          !
1201.-1300.  .0          !
1301.-1400.  .0          !
1401.-1500.  .0          !
1501.-1600.  .0          !
1601.-1700.  .0          !
1701.-1800.  .0          !
1801.-1900.  .0          !
1901.-2000.  .0          !
2001.-2100.  .0          !
2101.-2200.  .0          !
2201.-2300.  .0          !
2301.-2400.  .0          !
2401.-2500.  .0          !
2501.-2600.  .0          !
2601.-2700.  .0          !
2701.-2800.  .0          !
2801.-2900.  .0          !
2901.-3000.  .0          !
                         0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500705--CEMENT MANUF KILNS-COAL FIRED -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 41

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .293E 13 | .224E 13 | .121E 13 | .0 | .0 | .0 |
| 301.- 400. | .140E 14 | .109E 14 | .461E 13 | .655E 12 | .622E 12 | .345E 12 |
| 401.- 500. | .930E 13 | .735E 13 | .402E 13 | .120E 13 | .114E 13 | .953E 12 |
| 501.- 600. | .361E 13 | .290E 13 | .183E 13 | .691E 12 | .656E 12 | .600E 12 |
| 601.- 700. | .173E 13 | .141E 13 | .938E 12 | .471E 12 | .448E 12 | .410E 12 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .316E 14 | .247E 14 | .126E 14 | .302E 13 | .286E 13 | .231E 13 |

SCC = 30500705--CEMENT MANUFKILNS-COAL FIRED -WITH CONTROL EQUIPMENT -TOT RECS = 41

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 12 | .345E 12 | .272E 12 | .163E 12 | .389E 11 | .370E 11 | .338E 11 |
| 29 | .154E 11 | .119E 11 | .675E 10 | .567E 09 | .538E 09 | .493E 09 |
| 32 | .312E 14 | .245E 14 | .124E 14 | .298E 13 | .283E 13 | .227E 13 |
| | .316E 14 | .247E 14 | .126E 14 | .302E 13 | .286E 13 | .231E 13 |

CC =30500705--CEMENT MANUF KILNS-COAL FIRED ---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 41

```
TEMP RANGE   COUNT
                        ----------------------------------------------------------------------------------------------------
   0.- 100.  .0         !
 101.- 200.  .0         !
 201.- 300.  .224E 13   !HHHHHHHHHHHHHHHHHHHHHH
 301.- 400.  .109E 14   !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 401.- 500.  .735E 13   !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 501.- 600.  .290E 13   !HHHHHHHHHHHHHHHHHHHHHHHHHHHH
 601.- 700.  .141E 13   !HHHHHHHHHHHHHH
 701.- 800.  .0         !
 801.- 900.  .0         !
 901.-1000.  .0         !
1001.-1100.  .0         !
1101.-1200.  .0         !
1201.-1300.  .0         !
1301.-1400.  .0         !
1401.-1500.  .0         !
1501.-1600.  .0         !
1601.-1700.  .0         !
1701.-1800.  .0         !
1801.-1900.  .0         !
1901.-2000.  .0         !
2001.-2100.  .0         !
2101.-2200.  .0         !
2201.-2300.  .0         !
2301.-2400.  .0         !
2401.-2500.  .0         !
2501.-2600.  .0         !
2601.-2700.  .0         !
2701.-2800.  .0         !
2801.-2900.  .0         !
2901.-3000.  .0         !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500705--CEMENT MANUF KILNS-COAL FIRED -TOTAL SCC -SIC = 0 -TOT RECS = 47

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .536E 13 | .410E 13 | .222E 13 | .0 | .0 | .0 |
| 301.- 400. | .172E 14 | .134E 14 | .602E 13 | .774E 12 | .735E 12 | .448E 12 |
| 401.- 500. | .930E 13 | .735E 13 | .402E 13 | .120E 13 | .114E 13 | .953E 12 |
| 501.- 600. | .361E 13 | .290E 13 | .183E 13 | .691E 12 | .656E 12 | .600E 12 |
| 601.- 700. | .173E 13 | .141E 13 | .938E 12 | .471E 12 | .448E 12 | .410E 12 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .372E 14 | .291E 14 | .150E 14 | .314E 13 | .298E 13 | .241E 13 |

SCC = 30500705--CEMENT MANUFKILNS-COAL FIRED -TOTAL SCC -TOT RECS = 47

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 12 | .345E 12 | .272E 12 | .163E 12 | .389E 11 | .370E 11 | .338E 11 |
| 29 | .154E 11 | .119E 11 | .675E 10 | .567E 09 | .538E 09 | .493E 09 |
| 32 | .369E 14 | .288E 14 | .149E 14 | .310E 13 | .294E 13 | .238E 13 |
| | .372E 14 | .291E 14 | .150E 14 | .314E 13 | .298E 13 | .241E 13 |

CC 30500705--CEMENT MANUF KILNS-COAL FIRED --TOTAL SCC -SIC = 0 -TOT RECS = 47

| EMP RANGE | COUNT |
|---|---|
| 0.- 100. | .0 |
| 101.- 200. | .0 |
| 201.- 300. | .410E 13 |
| 301.- 400. | .134E 14 |
| 401.- 500. | .735E 13 |
| 501.- 600. | .290E 13 |
| 601.- 700. | .141E 13 |
| 701.- 800. | .0 |
| 801.- 900. | .0 |
| 901.-1000. | .0 |
| 1001.-1100. | .0 |
| 1101.-1200. | .0 |
| 1201.-1300. | .0 |
| 1301.-1400. | .0 |
| 1401.-1500. | .0 |
| 1501.-1600. | .0 |
| 1601.-1700. | .0 |
| 1701.-1800. | .0 |
| 1801.-1900. | .0 |
| 1901.-2000. | .0 |
| 2001.-2100. | .0 |
| 2101.-2200. | .0 |
| 2201.-2300. | .0 |
| 2301.-2400. | .0 |
| 2401.-2500. | .0 |
| 2501.-2600. | .0 |
| 2601.-2700. | .0 |
| 2701.-2800. | .0 |
| 2801.-2900. | .0 |
| 2901.-3000. | .0 |

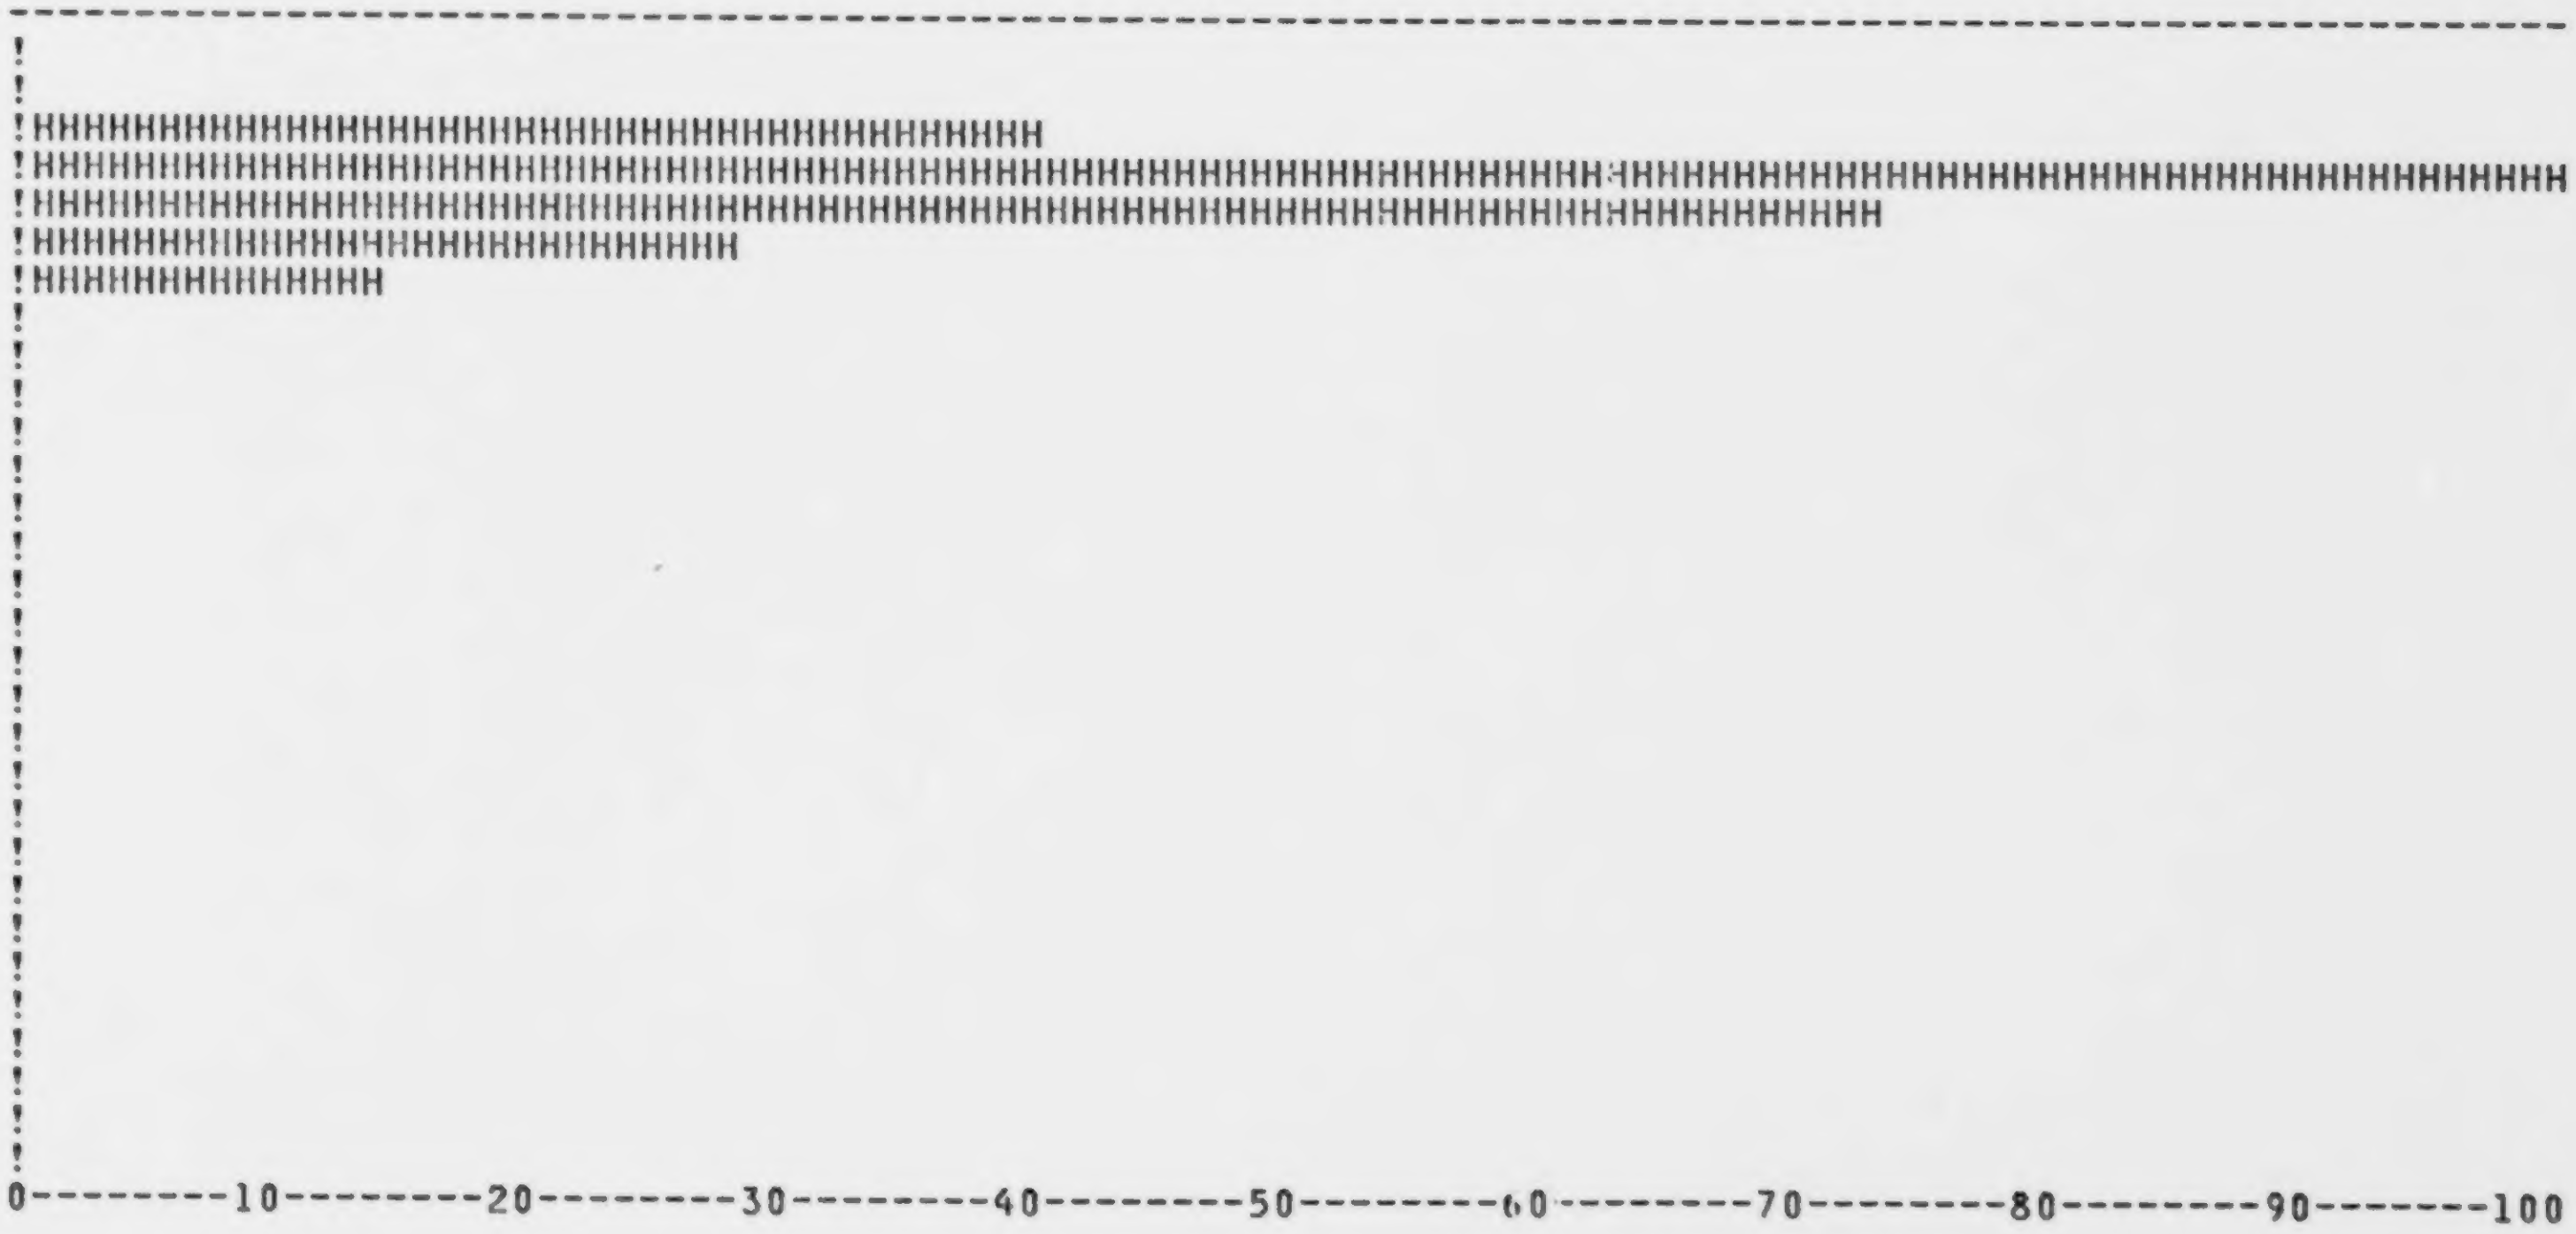

SCC= 30500799--CEMENT MANUF OTHER/NOT CLASSIFIED -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 24

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .123E 12 | .115E 12 | .888E 09 | .0 | .0 | .0 |
| 101.- 200. | .738E 11 | .554E 11 | .272E 11 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .196E 12 | .170E 12 | .281E 11 | .0 | .0 | .0 |

SCC = 30500799--CEMENT MANUFOTHER/NOT CLASSIFIED -NO CONTROL EQUIPMENT -TOT RECS = 24

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 30 | .116E 10 | .109E 10 | .888E 09 | .0 | .0 | .0 |
| 32 | .174E 12 | .149E 12 | .272E 11 | .0 | .0 | .0 |
| 99 | .212E 11 | .199E 11 | .0 | .0 | .0 | .0 |
| | .196E 12 | .170E 12 | .281E 11 | .0 | .0 | .0 |

CC = 30500799--CEMENT MANUF OTHER/NOT CLASSIFIED-- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 24

```
TEMP RANGE   COUNT
                    ---------------------------------------------------------------------------------------------------
   0.- 100.  .115E 12  !H
 101.- 200.  .554E 11  !H
 201.- 300.  .0        !
 301.- 400.  .0        !
 401.- 500.  .0        !
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500799--CEMENT MANUF OTHER/NOT CLASSIFIED -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 194

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .694E 12 | .651E 12 | .234E 12 | .0 | .0 | .0 |
| 101.- 200. | .977E 13 | .743E 13 | .173E 13 | .0 | .0 | .0 |
| 201.- 300. | .463E 13 | .351E 13 | .185E 13 | .0 | .0 | .0 |
| 301.- 400. | .277E 13 | .215E 13 | .123E 13 | .148E 12 | .140E 12 | .128E 12 |
| 401.- 500. | .337E 13 | .268E 13 | .164E 13 | .501E 12 | .476E 12 | .435E 12 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .212E 14 | .164E 14 | .669E 13 | .649E 12 | .616E 12 | .563E 12 |

SCC = 30500799--CEMENT MANUFOTHER/NOT CLASSIFIED -WITH CONTROL EQUIPMENT -TOT RECS = 194

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .210E 14 | .162E 14 | .666E 13 | .649E 12 | .616E 12 | .563E 12 |
| 35 | .698E 11 | .539E 11 | .288E 11 | .0 | .0 | .0 |
| 50 | .150E 11 | .141E 11 | .0 | .0 | .0 | .0 |
| 99 | .144E 12 | .110E 12 | .496E 10 | .0 | .0 | .0 |
| | .212E 14 | .164E 14 | .669E 13 | .649E 12 | .616E 12 | .563E 12 |

CC =30500799--CEMENT MANUF OTHER/NOT CLASSIFIED---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 194

| TEMP RANGE | COUNT |
|---|---|
| 0.- 100. | .651E 12 |
| 101.- 200. | .743E 13 |
| 201.- 300. | .351E 13 |
| 301.- 400. | .215E 13 |
| 401.- 500. | .268E 13 |
| 501.- 600. | .0 |
| 601.- 700. | .0 |
| 701.- 800. | .0 |
| 801.- 900. | .0 |
| 901.-1000. | .0 |
| 1001.-1100. | .0 |
| 1101.-1200. | .0 |
| 1201.-1300. | .0 |
| 1301.-1400. | .0 |
| 1401.-1500. | .0 |
| 1501.-1600. | .0 |
| 1601.-1700. | .0 |
| 1701.-1800. | .0 |
| 1801.-1900. | .0 |
| 1901.-2000. | .0 |
| 2001.-2100. | .0 |
| 2101.-2200. | .0 |
| 2201.-2300. | .0 |
| 2301.-2400. | .0 |
| 2401.-2500. | .0 |
| 2501.-2600. | .0 |
| 2601.-2700. | .0 |
| 2701.-2800. | .0 |
| 2801.-2900. | .0 |
| 2901.-3000. | .0 |

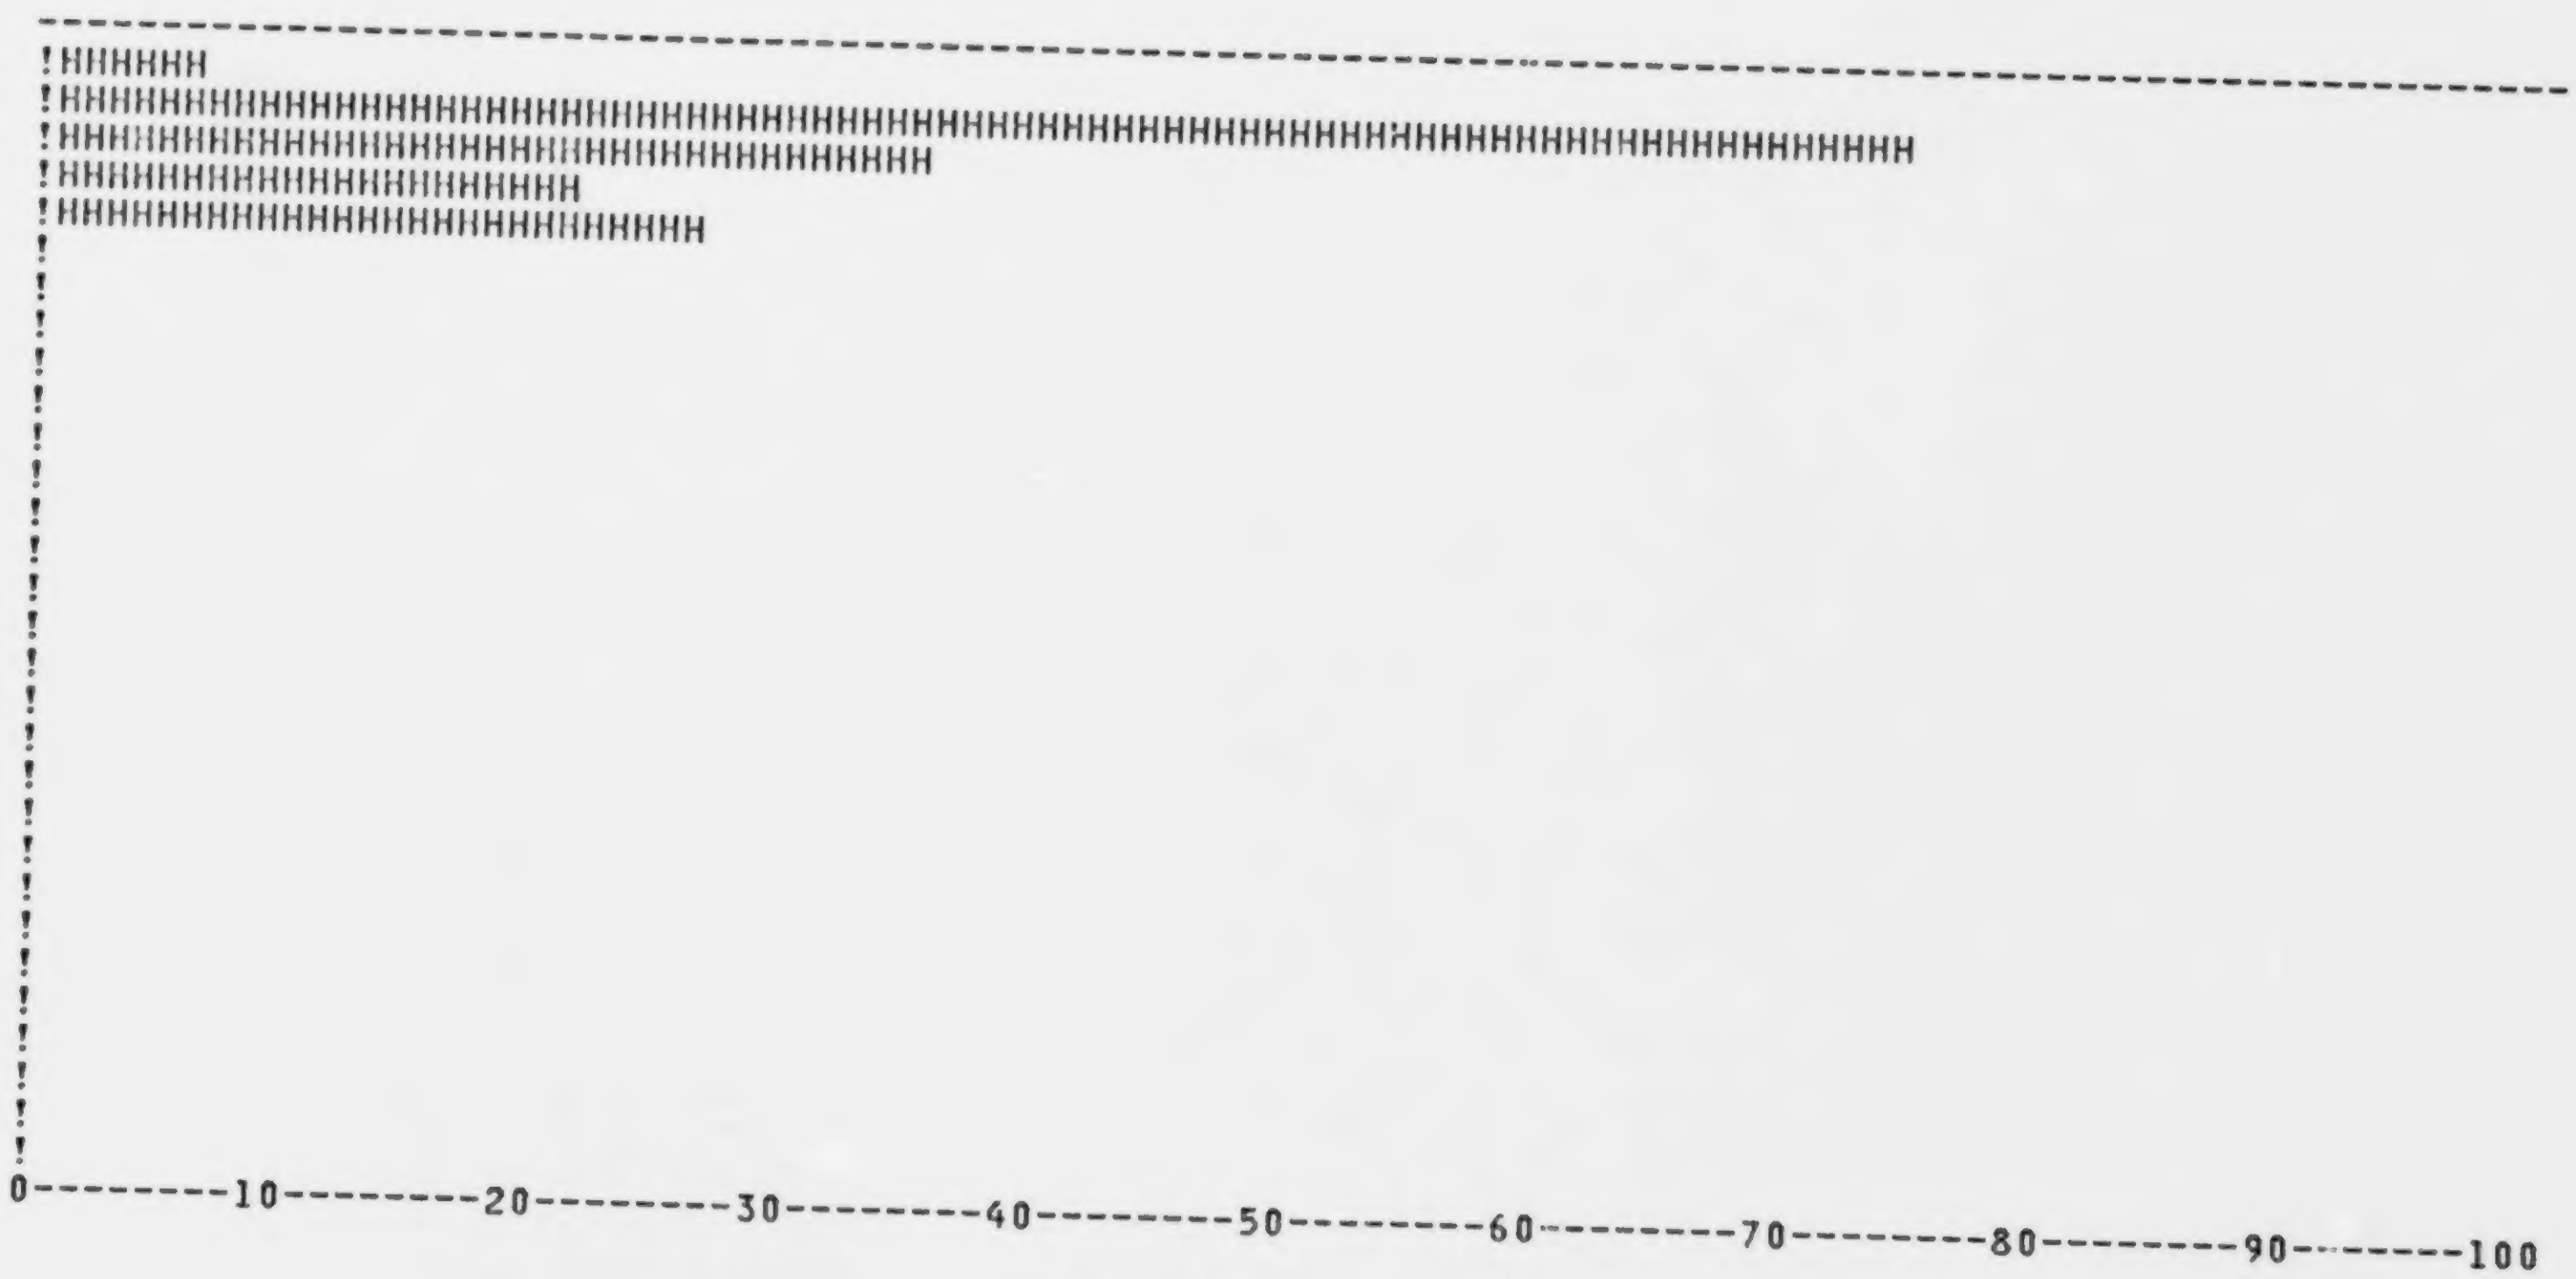

SCC= 30500799--CEMENT MANUF OTHER/NOT CLASSIFIED -TOTAL SCC -SIC = 0 -TOT RECS = 218

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .817E 12 | .766E 12 | .235E 12 | .0 | .0 | .0 |
| 101.- 200. | .984E 13 | .749E 13 | .176E 13 | .0 | .0 | .0 |
| 201.- 300. | .463E 13 | .351E 13 | .185E 13 | .0 | .0 | .0 |
| 301.- 400. | .277E 13 | .215E 13 | .123E 13 | .148E 12 | .140E 12 | .128E 12 |
| 401.- 500. | .337E 13 | .268E 13 | .164E 13 | .501E 12 | .476E 12 | .435E 12 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .214E 14 | .166E 14 | .672E 13 | .649E 12 | .616E 12 | .563E 12 |

SCC = 30500799--CEMENT MANUFOTHER/NOT CLASSIFIED -TOTAL SCC -TOT RECS = 218

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 30 | .116E 10 | .109E 10 | .888E 09 | .0 | .0 | .0 |
| 32 | .212E 14 | .164E 14 | .669E 13 | .649E 12 | .616E 12 | .563E 12 |
| 35 | .698E 11 | .539E 11 | .288E 11 | .0 | .0 | .0 |
| 50 | .150E 11 | .141E 11 | .0 | .0 | .0 | .0 |
| 99 | .165E 12 | .129E 12 | .496E 10 | .0 | .0 | .0 |
| | .214E 14 | .166E 14 | .672E 13 | .649E 12 | .616E 12 | .563E 12 |

CC 30500799--CEMENT MANUF OTHER/NOT CLASSIFIED--TOTAL SCC -SIC = 0 -TOT RECS = 218

```
EMP RANGE   COUNT

                          ----------------------------------------------------------------------------------------------------
   0.- 100.  .766E 12   !HHHHHHHH
 101.- 200.  .749E 13   !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 201.- 300.  .351E 13   !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 301.- 400.  .215E 13   !HHHHHHHHHHHHHHHHHHHHH
 401.- 500.  .268E 13   !HHHHHHHHHHHHHHHHHHHHHHHHHHH
 501.- 600.  .0         !
 601.- 700.  .0         !
 701.- 800.  .0         !
 801.- 900.  .0         !
 901.-1000.  .0         !
1001.-1100.  .0         !
1101.-1200.  .0         !
1201.-1300.  .0         !
1301.-1400.  .0         !
1401.-1500.  .0         !
1501.-1600.  .0         !
1601.-1700.  .0         !
1701.-1800.  .0         !
1801.-1900.  .0         !
1901.-2000.  .0         !
2001.-2100.  .0         !
2101.-2200.  .0         !
2201.-2300.  .0         !
2301.-2400.  .0         !
2401.-2500.  .0         !
2501.-2600.  .0         !
2601.-2700.  .0         !
2701.-2800.  .0         !
2801.-2900.  .0         !
2901.-3000.  .0         !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500801--CERAM AND CL DRYING -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 89

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .105E 11 | .987E 10 | .295E 10 | .0 | .0 | .0 |
| 101.- 200. | .191E 13 | .143E 13 | .335E 12 | .0 | .0 | .0 |
| 201.- 300. | .615E 12 | .465E 12 | .211E 12 | .0 | .0 | .0 |
| 301.- 400. | .227E 12 | .176E 12 | .101E 12 | .126E 11 | .119E 11 | .109E 11 |
| 401.- 500. | .180E 12 | .142E 12 | .112E 11 | .242E 11 | .230E 11 | .294E 10 |
| 501.- 600. | .382E 12 | .307E 12 | .167E 12 | .762E 11 | .723E 11 | .569E 11 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .332E 13 | .253E 13 | .827E 12 | .113E 12 | .107E 12 | .708E 11 |

SCC = 30500801--CERAM AND CLDRYING -NO CONTROL EQUIPMENT -TOT RECS = 89

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 14 | .982E 11 | .772E 11 | .295E 10 | .107E 11 | .101E 11 | .0 |
| 28 | .388E 11 | .290E 11 | .0 | .0 | .0 | .0 |
| 32 | .319E 13 | .243E 13 | .824E 12 | .102E 12 | .971E 11 | .708E 11 |
| | .332E 13 | .253E 13 | .827E 12 | .113E 12 | .107E 12 | .708E 11 |

CC = 30500801--CERAM AND CL DRYING -- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 89

```
TEMP RANGE   COUNT
                        -------------------------------------------------------------------------------------------------------
   0.- 100.  .987E 10  !H
 101.- 200.  .143E 13  !HHHHHHHHHHHHHH
 201.- 300.  .465E 12  !HHHH
 301.- 400.  .176E 12  !H
 401.- 500.  .142E 12  !H
 501.- 600.  .307E 12  !HHH
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500801--CERAM AND CL DRYING -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 128

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .133E 12 | .124E 12 | .429E 11 | .0 | .0 | .0 |
| 101.- 200. | .864E 13 | .656E 13 | .228E 13 | .0 | .0 | .0 |
| 201.- 300. | .464E 13 | .351E 13 | .158E 13 | .0 | .0 | .0 |
| 301.- 400. | .603E 12 | .468E 12 | .266E 12 | .268E 11 | .254E 11 | .233E 11 |
| 401.- 500. | .101E 12 | .798E 11 | .479E 11 | .118E 11 | .112E 11 | .102E 11 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .141E 14 | .107E 14 | .422E 13 | .386E 11 | .367E 11 | .335E 11 |

SCC = 30500801--CERAM AND CLDRYING -WITH CONTROL EQUIPMENT -TOT RECS = 128

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 14 | .132E 13 | .100E 13 | .510E 12 | .0 | .0 | .0 |
| 28 | .271E 11 | .202E 11 | .988E 10 | .0 | .0 | .0 |
| 32 | .127E 14 | .964E 13 | .366E 13 | .268E 11 | .254E 11 | .233E 11 |
| 99 | .101E 12 | .798E 11 | .479E 11 | .118E 11 | .112E 11 | .102E 11 |
| | .141E 14 | .107E 14 | .422E 13 | .386E 11 | .367E 11 | .335E 11 |

CC =30500801--CERAM AND CL DRYING ---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 128

```
TEMP RANGE   COUNT
                        ----------------------------------------------------------------------------------------------------
   0.- 100.  .124E 12  !H
 101.- 200.  .656E 13  !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 201.- 300.  .351E 13  !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 301.- 400.  .468E 12  !HHHH
 401.- 500.  .798E 11  !H
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500801--CERAM AND CL DRYING -TOTAL SCC -SIC = 0 -TOT RECS = 217

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .143E 12 | .134E 12 | .459E 11 | .0 | .0 | .0 |
| 101.- 200. | .106E 14 | .800E 13 | .262E 13 | .0 | .0 | .0 |
| 201.- 300. | .526E 13 | .397E 13 | .179E 13 | .0 | .0 | .0 |
| 301.- 400. | .830E 12 | .644E 12 | .367E 12 | .394E 11 | .374E 11 | .342E 11 |
| 401.- 500. | .281E 12 | .222E 12 | .590E 11 | .360E 11 | .342E 11 | .132E 11 |
| 501.- 600. | .382E 12 | .307E 12 | .167E 12 | .762E 11 | .723E 11 | .569E 11 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .174E 14 | .133E 14 | .505E 13 | .152E 12 | .144E 12 | .104E 12 |

SCC = 30500801--CERAM AND CLDRYING  -TOTAL SCC -TOT RECS = 217

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 14 | .142E 13 | .108E 13 | .513E 12 | .107E 11 | .101E 11 | .0 |
| 28 | .659E 11 | .491E 11 | .988E 10 | .0 | .0 | .0 |
| 32 | .159E 14 | .121E 14 | .448E 13 | .129E 12 | .123E 12 | .940E 11 |
| 99 | .101E 12 | .798E 11 | .479E 11 | .118E 11 | .112E 11 | .102E 11 |
| | .174E 14 | .133E 14 | .505E 13 | .152E 12 | .144E 12 | .104E 12 |

CC 30500801--CERAM AND CL DRYING  --TOTAL SCC -SIC = 0 -TOT RECS = 217

```
EMP RANGE     COUNT

                          --------------------------------------------------------------------------------------------------------
   0.- 100.   .134E 12   !H
 101.- 200.   .800E 13   !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH-----
 201.- 300.   .397E 13   !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
                          HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 301.- 400.   .644E 12   !HHHHHH
 401.- 500.   .222E 12   !HH
 501.- 600.   .307E 12   !HHH
 601.- 700.   .0         !
 701.- 800.   .0         !
 801.- 900.   .0         !
 901.-1000.   .0         !
1001.-1100.   .0         !
1101.-1200.   .0         !
1201.-1300.   .0         !
1301.-1400.   .0         !
1401.-1500.   .0         !
1501.-1600.   .0         !
1601.-1700.   .0         !
1701.-1800.   .0         !
1801.-1900.   .0         !
1901.-2000.   .0         !
2001.-2100.   .0         !
2101.-2200.   .0         !
2201.-2300.   .0         !
2301.-2400.   .0         !
2401.-2500.   .0         !
2501.-2600.   .0         !
2601.-2700.   .0         !
2701.-2800.   .0         !
2801.-2900.   .0         !
2901.-3000.   .0         !
                         0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500802--CERAM AND CL GRINDING -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 24

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .773E 10 | .725E 10 | .351E 09 | .0 | .0 | .0 |
| 101.- 200. | .104E 12 | .813E 11 | .328E 11 | .0 | .0 | .0 |
| 201.- 300. | .109E 11 | .815E 10 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .276E 11 | .218E 11 | .0 | .339E 10 | .322E 10 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .150E 12 | .119E 12 | .331E 11 | .339E 10 | .322E 10 | .0 |

SCC = 30500802--CERAM AND CLGRINDING -NO CONTROL EQUIPMENT -TOT RECS = 24

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .150E 12 | .119E 12 | .331E 11 | .339E 10 | .322E 10 | .0 |
| | .150E 12 | .119E 12 | .331E 11 | .339E 10 | .322E 10 | .0 |

CC = 30500802--CERAM AND CL GRINDING -- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 24

```
TEMP RANGE   COUNT
                     ------------------------------------------------------------------------------------------------------
   0.- 100.  .725E 10  !H
 101.- 200.  .813E 11  !H
 201.- 300.  .815E 10  !H
 301.- 400.  .0        !
 401.- 500.  .218E 11  !H
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500802--CERAM AND CL GRINDING -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 168

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .611E 12 | .574E 12 | .155E 12 | .0 | .0 | .0 |
| 101.- 200. | .200E 13 | .156E 13 | .721E 12 | .0 | .0 | .0 |
| 201.- 300. | .146E 12 | .110E 12 | .567E 11 | .0 | .0 | .0 |
| 301.- 400. | .461E 11 | .360E 11 | .209E 11 | .342E 10 | .325E 10 | .298E 10 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .280E 13 | .228E 13 | .954E 12 | .342E 10 | .325E 10 | .298E 10 |

SCC = 30500802--CERAM AND CLGRINDING -WITH CONTROL EQUIPMENT -TOT RECS = 168

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 14 | .380E 12 | .292E 12 | .141E 12 | .0 | .0 | .0 |
| 32 | .242E 13 | .199E 13 | .813E 12 | .342E 10 | .325E 10 | .298E 10 |
| | .280E 13 | .228E 13 | .954E 12 | .342E 10 | .325E 10 | .298E 10 |

CC =30500802--CERAM AND CL GRINDING ---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 168

```
TEMP RANGE   COUNT
                        ------------------------------------------------------------------------------------------------------
   0.- 100.  .574E 12  !HHHHH
 101.- 200.  .156E 13  !HHHHHHHHHHHHHHH
 201.- 300.  .110E 12  !H
 301.- 400.  .360E 11  !H
 401.- 500.  .0        !
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500802--CERAM AND CL GRINDING -TOTAL SCC -SIC = 0 -TOT RECS = 192

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .619E 12 | .581E 12 | .155E 12 | .0 | .0 | .0 |
| 101.- 200. | .210E 13 | .164E 13 | .754E 12 | .0 | .0 | .0 |
| 201.- 300. | .157E 12 | .118E 12 | .567E 11 | .0 | .0 | .0 |
| 301.- 400. | .461E 11 | .360E 11 | .209E 11 | .342E 10 | .325E 10 | .298E 10 |
| 401.- 500. | .276E 11 | .218E 11 | .0 | .339E 10 | .322E 10 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .295E 13 | .240E 13 | .987E 12 | .682E 10 | .647E 10 | .298E 10 |

SCC = 30500802--CERAM AND CLGRINDING -TOTAL SCC -TOT RECS = 192

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 14 | .380E 12 | .292E 12 | .141E 12 | .0 | .0 | .0 |
| 32 | .257E 13 | .211E 13 | .846E 12 | .682E 10 | .647E 10 | .298E 10 |
| | .295E 13 | .240E 13 | .987E 12 | .682E 10 | .647E 10 | .298E 10 |

CC 30500802--CERAM AND CL GRINDING --TOTAL SCC -SIC = 0 -TOT RECS = 192

```
EMP RANGE    COUNT

                        ----------------------------------------------------------------------------------------------------
   0.- 100.  .581E 12  !HHHHH
 101.- 200.  .164E 13  !HHHHHHHHHHHHHHHH
 201.- 300.  .118E 12  !H
 301.- 400.  .360E 11  !H
 401.- 500.  .218E 11  !H
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500803--CERAM AND CL STORAGE -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 14

| TEMP | MAXIMUM | EXPECTED | MINIMUM | MAXIMUM | EXPECTED | MINIMUM |
|---|---|---|---|---|---|---|
| | 60 DEG | 60 DEG | 60 DEG | 300 DEG | 300 DEG | 300 DEG |

0 RECORDS FOR THIS SECTION OF SCC

SCC = 30500803--CERAM AND CLSTORAGE -NO CONTROL EQUIPMENT -TOT RECS = 14

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|

SCC= 30500803--CERAM AND CL STORAGE -WITH CONTROL EQUIPMENT -SIC = ) -TOT RECS = 56

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .933E 11 | .875E 11 | .416E 11 | .0 | .0 | .0 |
| 101.- 200. | .533E 11 | .462E 11 | .198E 11 | .0 | .0 | .0 |
| 201.- 300. | .290E 11 | .219E 11 | .112E 11 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .176E 12 | .156E 12 | .726E 11 | .0 | .0 | .0 |

SCC = 30500803--CERAM AND CLSTORAGE -WITH CONTROL EQUIPMENT -TOT RECS = 56

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 14 | .293E 10 | .274E 10 | .224E 10 | .0 | .0 | .0 |
| 30 | .146E 11 | .137E 11 | .888E 10 | .0 | .0 | .0 |
| 32 | .158E 12 | .139E 12 | .614E 11 | .0 | .0 | .0 |
| 99 | .100E 09 | .938E 08 | .764E 08 | .0 | .0 | .0 |
| | .176E 12 | .156E 12 | .726E 11 | .0 | .0 | .0 |

CC =30500803--CERAM AND CL STORAGE ---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 56

```
TEMP RANGE     COUNT
                        ----------------------------------------------------------------------------------------------------
   0.- 100.   .875E 11  !H
 101.- 200.   .462E 11  !H
 201.- 300.   .219E 11  !H
 301.- 400.   .0        !
 401.- 500.   .0        !
 501.- 600.   .0        !
 601.- 700.   .0        !
 701.- 800.   .0        !
 801.- 900.   .0        !
 901.-1000.   .0        !
1001.-1100.   .0        !
1101.-1200.   .0        !
1201.-1300.   .0        !
1301.-1400.   .0        !
1401.-1500.   .0        !
1501.-1600.   .0        !
1601.-1700.   .0        !
1701.-1800.   .0        !
1801.-1900.   .0        !
1901.-2000.   .0        !
2001.-2100.   .0        !
2101.-2200.   .0        !
2201.-2300.   .0        !
2301.-2400.   .0        !
2401.-2500.   .0        !
2501.-2600.   .0        !
2601.-2700.   .0        !
2701.-2800.   .0        !
2801.-2900.   .0        !
2901.-3000.   .0        !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500899--CERAM AND CL OTHER/NOT CLASSIFIED -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 59

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .449E 11 | .421E 11 | .120E 11 | .0 | .0 | .0 |
| 101.- 200. | .159E 13 | .120E 13 | .173E 12 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .101E 12 | .783E 11 | .149E 11 | .679E 10 | .644E 10 | .157E 10 |
| 401.- 500. | .112E 12 | .890E 11 | .544E 11 | .161E 11 | .153E 11 | .140E 11 |
| 501.- 600. | .952E 11 | .759E 11 | .470E 11 | .156E 11 | .148E 11 | .136E 11 |
| 601.- 700. | .497E 11 | .407E 11 | .271E 11 | .138E 11 | .131E 11 | .120E 11 |
| 701.- 800. | .436E 10 | .361E 10 | .248E 10 | .144E 10 | .137E 10 | .125E 10 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .129E 11 | .109E 11 | .779E 10 | .530E 10 | .504E 10 | .460E 10 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .237E 12 | .202E 12 | .0 | .112E 12 | .106E 12 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .142E 11 | .126E 11 | .100E 11 | .944E 10 | .885E 10 | .751E 10 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .226E 13 | .176E 13 | .349E 12 | .180E 12 | .171E 12 | .545E 11 |

SCC = 30500899--CERAM AND CLOTHER/NOT CLASSIFIED -NO CONTROL EQUIPMENT -TOT RECS = 59

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 14 | .615E 11 | .480E 11 | .0 | .0 | .0 | .0 |
| 32 | .181E 13 | .139E 13 | .349E 12 | .685E 11 | .649E 11 | .545E 11 |
| 33 | .517E 11 | .389E 11 | .0 | .0 | .0 | .0 |
| 34 | .237E 12 | .202E 12 | .0 | .112E 12 | .106E 12 | .0 |
| 99 | .103E 12 | .778E 11 | .0 | .0 | .0 | .0 |
| | .226E 13 | .176E 13 | .349E 12 | .180E 12 | .171E 12 | .545E 11 |

CC = 30500899--CERAM AND CL OTHER/NOT CLASSIFIED-- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 59

```
TEMP RANGE   COUNT
                       ----------------------------------------------------------------------------------------------------
   0.- 100.  .421E 11  !H
 101.- 200.  .120E 13  !HHHHHHHHHHHH
 201.- 300.  .0        !
 301.- 400.  .783E 11  !H
 401.- 500.  .890E 11  !H
 501.- 600.  .759E 11  !H
 601.- 700.  .407E 11  !H
 701.- 800.  .361E 10  !H
 801.- 900.  .0        !
 901.-1000.  .109E 11  !H
1001.-1100.  .0        !
1101.-1200.  .202E 12  !HH
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .126E 11  !H
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500899--CERAM AND CL OTHER/NOT CLASSIFIED -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 171

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .398E 12 | .373E 12 | .119E 12 | .0 | .0 | .0 |
| 101.- 200. | .173E 13 | .131E 13 | .650E 12 | .0 | .0 | .0 |
| 201.- 300. | .372E 12 | .283E 12 | .150E 12 | .0 | .0 | .0 |
| 301.- 400. | .235E 12 | .182E 12 | .103E 12 | .865E 10 | .821E 10 | .751E 10 |
| 401.- 500. | .437E 12 | .345E 12 | .206E 12 | .493E 11 | .468E 11 | .428E 11 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .749E 11 | .621E 11 | .0 | .248E 11 | .236E 11 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .971E 10 | .829E 10 | .612E 10 | .457E 10 | .435E 10 | .396E 10 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .325E 13 | .256E 13 | .123E 13 | .874E 11 | .830E 11 | .543E 11 |

SCC = 30500899--CERAM AND CLOTHER/NOT CLASSIFIED -WITH CONTROL EQUIPMENT -TOT RECS = 171

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 14 | .115E 12 | .911E 11 | .409E 11 | .0 | .0 | .0 |
| 32 | .313E 13 | .246E 13 | .119E 13 | .874E 11 | .830E 11 | .543E 11 |
| 99 | .938E 10 | .880E 10 | .0 | .0 | .0 | .0 |
| | .325E 13 | .256E 13 | .123E 13 | .874E 11 | .830E 11 | .543E 11 |

CC =30500899--CERAM AND CL OTHER/NOT CLASSIFIED---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 171

```
TEMP RANGE    COUNT
                      ------------------------------------------------------------------------------------------------
   0.- 100.   .373E 12 !HHH
 101.- 200.   .131E 13 !HHHHHHHHHHHHH
 201.- 300.   .283E 12 !HH
 301.- 400.   .182E 12 !H
 401.- 500.   .345E 12 !HHH
 501.- 600.   .0       !
 601.- 700.   .0       !
 701.- 800.   .621E 11 !H
 801.- 900.   .0       !
 901.-1000.   .0       !
1001.-1100.   .0       !
1101.-1200.   .829E 10 !H
1201.-1300.   .0       !
1301.-1400.   .0       !
1401.-1500.   .0       !
1501.-1600.   .0       !
1601.-1700.   .0       !
1701.-1800.   .0       !
1801.-1900.   .0       !
1901.-2000.   .0       !
2001.-2100.   .0       !
2101.-2200.   .0       !
2201.-2300.   .0       !
2301.-2400.   .0       !
2401.-2500.   .0       !
2501.-2600.   .0       !
2601.-2700.   .0       !
2701.-2800.   .0       !
2801.-2900.   .0       !
2901.-3000.   .0       !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500899--CERAM AND CL OTHER/NOT CLASSIFIED -TOTAL SCC -SIC = 0 -TOT RECS = 230

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .442E 12 | .415E 12 | .131E 12 | .0 | .0 | .0 |
| 101.- 200. | .332E 13 | .251E 13 | .823E 12 | .0 | .0 | .0 |
| 201.- 300. | .372E 12 | .283E 12 | .150E 12 | .0 | .0 | .0 |
| 301.- 400. | .336E 12 | .260E 12 | .118E 12 | .154E 11 | .147E 11 | .908E 10 |
| 401.- 500. | .550E 12 | .434E 12 | .261E 12 | .654E 11 | .621E 11 | .568E 11 |
| 501.- 600. | .952E 11 | .759E 11 | .470E 11 | .156E 11 | .148E 11 | .136E 11 |
| 601.- 700. | .497E 11 | .407E 11 | .271E 11 | .138E 11 | .131E 11 | .120E 11 |
| 701.- 800. | .793E 11 | .657E 11 | .248E 10 | .263E 11 | .250E 11 | .125E 10 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .129E 11 | .109E 11 | .779E 10 | .530E 10 | .504E 10 | .460E 10 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .247E 12 | .211E 12 | .612E 10 | .116E 12 | .111E 12 | .396E 10 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .142E 11 | .126E 11 | .100E 11 | .944E 10 | .885E 10 | .751E 10 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .551E 13 | .432E 13 | .158E 13 | .267E 12 | .254E 12 | .109E 12 |

SCC = 30500899--CERAM AND CLOTHER/NOT CLASSIFIED -TOTAL SCC -TOT RECS = 230

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 14 | .176E 12 | .139E 12 | .409E 11 | .0 | .0 | .0 |
| 32 | .494E 13 | .385E 13 | .154E 13 | .156E 12 | .148E 12 | .109E 12 |
| 33 | .517E 11 | .389E 11 | .0 | .0 | .0 | .0 |
| 34 | .237E 12 | .202E 12 | .0 | .112E 12 | .106E 12 | .0 |
| 99 | .113E 12 | .866E 11 | .0 | .0 | .0 | .0 |
| | .551E 13 | .432E 13 | .158E 13 | .267E 12 | .254E 12 | .109E 12 |

CC 30500899--CERAM AND CL OTHER/NOT CLASSIFIED--TOTAL SCC -SIC = 0 -TOT RECS = 230

```
EMP RANGE     COUNT
                        ----------------------------------------------------------------------------------------------------
   0.- 100.  .415E 12  !HHHH
 101.- 200.  .251E 13  !HHHHHHHHHHHHHHHHHHHHHHHHH
 201.- 300.  .283E 12  !HH
 301.- 400.  .260E 12  !HH
 401.- 500.  .434E 12  !HHHH
 501.- 600.  .759E 11  !H
 601.- 700.  .407E 11  !H
 701.- 800.  .657E 11  !H
 801.- 900.  .0        !
 901.-1000.  .109E 11  !H
1001.-1100.  .0        !
1101.-1200.  .211E 12  !HH
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .126E 11  !H
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500901--CLAY AND FLY FLY ASH -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 2

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .424E 12 | .334E 12 | .103E 12 | .519E 11 | .493E 11 | .246E 11 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .424E 12 | .334E 12 | .103E 12 | .519E 11 | .493E 11 | .246E 11 |

SCC = 30500901--CLAY AND FLYFLY ASH -NO CONTROL EQUIPMENT -TOT RECS = 2

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 49 | .214E 12 | .169E 12 | .103E 12 | .283E 11 | .269E 11 | .246E 11 |
| 99 | .210E 12 | .165E 12 | .0 | .236E 11 | .224E 11 | .0 |
| | .424E 12 | .334E 12 | .103E 12 | .519E 11 | .493E 11 | .246E 11 |

CC = 30500901--CLAY AND FLY FLY ASH -- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 2

```
TEMP RANGE   COUNT
                    -------------------------------------------------------------------------------------------------
   0.- 100.  .0        !
 101.- 200.  .0        !
 201.- 300.  .0        !
 301.- 400.  .0        !
 401.- 500.  .334E 12  !HHH
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500901--CLAY AND FLY FLY ASH -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 1

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .495E 11 | .457E 11 | .225E 11 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .495E 11 | .457E 11 | .225E 11 | .0 | .0 | .0 |

SCC = 30500901--CLAY AND FLYFLY ASH -WITH CONTROL EQUIPMENT -TOT RECS = 1

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .495E 11 | .457E 11 | .225E 11 | .0 | .0 | .0 |
| | .495E 11 | .457E 11 | .225E 11 | .0 | .0 | .0 |

CC =30500901--CLAY AND FLY FLY ASH ---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 1

```
TEMP RANGE   COUNT
                         ------------------------------------------------------------------------------------
   0.- 100.  .0          !
 101.- 200.  .457E 11    !H
 201.- 300.  .0          !
 301.- 400.  .0          !
 401.- 500.  .0          !
 501.- 600.  .0          !
 601.- 700.  .0          !
 701.- 800.  .0          !
 801.- 900.  .0          !
 901.-1000.  .0          !
1001.-1100.  .0          !
1101.-1200.  .0          !
1201.-1300.  .0          !
1301.-1400.  .0          !
1401.-1500.  .0          !
1501.-1600.  .0          !
1601.-1700.  .0          !
1701.-1800.  .0          !
1801.-1900.  .0          !
1901.-2000.  .0          !
2001.-2100.  .0          !
2101.-2200.  .0          !
2201.-2300.  .0          !
2301.-2400.  .0          !
2401.-2500.  .0          !
2501.-2600.  .0          !
2601.-2700.  .0          !
2701.-2800.  .0          !
2801.-2900.  .0          !
2901.-3000.  .0          !
                         0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500901--CLAY AND FLY FLY ASH -TOTAL SCC -SIC = 0 -TOT RECS = 3

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.- 200. | .495E 11 | .457E 11 | .225E 11 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .424E 12 | .334E 12 | .103E 12 | .519E 11 | .493E 11 | .246E 11 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .473E 12 | .380E 12 | .125E 12 | .519E 11 | .493E 11 | .246E 11 |

SCC = 30500901--CLAY AND FLYFLY ASH -TOTAL SCC -TOT RECS = 3

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .495E 11 | .457E 11 | .225E 11 | .0 | .0 | .0 |
| 49 | .214E 12 | .169E 12 | .103E 12 | .283E 11 | .269E 11 | .246E 11 |
| 99 | .210E 12 | .165E 12 | .0 | .236E 11 | .224E 11 | .0 |
| | .473E 12 | .380E 12 | .125E 12 | .519E 11 | .493E 11 | .246E 11 |

CC 30500901--CLAY AND FLY FLY ASH --TOTAL SCC -SIC = 0 -TOT RECS = 3

```
EMP RANGE    COUNT

    0.- 100.  .0        ------------------------------------------------------------------------------------------------------
  101.- 200.  .457E 11  !H
  201.- 300.  .0        !
  301.- 400.  .0        !
  401.- 500.  .334E 12  !HHH
  501.- 600.  .0        !
  601.- 700.  .0        !
  701.- 800.  .0        !
  801.- 900.  .0        !
  901.-1000.  .0        !
 1001.-1100.  .0        !
 1101.-1200.  .0        !
 1201.-1300.  .0        !
 1301.-1400.  .0        !
 1401.-1500.  .0        !
 1501.-1600.  .0        !
 1601.-1700.  .0        !
 1701.-1800.  .0        !
 1801.-1900.  .0        !
 1901.-2000.  .0        !
 2001.-2100.  .0        !
 2101.-2200.  .0        !
 2201.-2300.  .0        !
 2301.-2400.  .0        !
 2401.-2500.  .0        !
 2501.-2600.  .0        !
 2601.-2700.  .0        !
 2701.-2800.  .0        !
 2801.-2900.  .0        !
 2901.-3000.  .0        !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500902--CLAY AND FLY CLAY AND COKE -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 0

| TEMP | MAXIMUM | EXPECTED | MINIMUM | MAXIMUM | EXPECTED | MINIMUM |
|---|---|---|---|---|---|---|
| | 60 DEG | 60 DEG | 60 DEG | 300 DEG | 300 DEG | 300 DEG |

0 RECORDS FOR THIS SECTION OF SCC

SCC = 30500902--CLAY AND FLYCLAY AND COKE -NO CONTROL EQUIPMENT -TOT RECS = 0

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|

SCC= 30500902--CLAY AND FLY CLAY AND COKE -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 1

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .167E 10 | .156E 10 | .127E 10 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .167E 10 | .156E 10 | .127E 10 | .0 | .0 | .0 |

SCC = 30500902--CLAY AND FLYCLAY AND COKE -WITH CONTROL EQUIPMENT -TOT RECS = 1

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 14 | .167E 10 | .156E 10 | .127E 10 | .0 | .0 | .0 |
| | .167E 10 | .156E 10 | .127E 10 | .0 | .0 | .0 |

CC =30500902--CLAY AND FLY CLAY AND COKE ---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 1

| TEMP RANGE | COUNT |
|---|---|
| 0.- 100. | .156E 10 |
| 101.- 200. | .0 |
| 201.- 300. | .0 |
| 301.- 400. | .0 |
| 401.- 500. | .0 |
| 501.- 600. | .0 |
| 601.- 700. | .0 |
| 701.- 800. | .0 |
| 801.- 900. | .0 |
| 901.-1000. | .0 |
| 1001.-1100. | .0 |
| 1101.-1200. | .0 |
| 1201.-1300. | .0 |
| 1301.-1400. | .0 |
| 1401.-1500. | .0 |
| 1501.-1600. | .0 |
| 1601.-1700. | .0 |
| 1701.-1800. | .0 |
| 1801.-1900. | .0 |
| 1901.-2000. | .0 |
| 2001.-2100. | .0 |
| 2101.-2200. | .0 |
| 2201.-2300. | .0 |
| 2301.-2400. | .0 |
| 2401.-2500. | .0 |
| 2501.-2600. | .0 |
| 2601.-2700. | .0 |
| 2701.-2800. | .0 |
| 2801.-2900. | .0 |
| 2901.-3000. | .0 |

SCC= 30500903--CLAY AND FLY NATURAL CLAY -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 30

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .103E 12 | .962E 11 | .0 | .0 | .0 | .0 |
| 101.- 200. | .150E 11 | .130E 11 | .641E 10 | .0 | .0 | .0 |
| 201.- 300. | .281E 11 | .218E 11 | ******** | .0 | .0 | .0 |
| 301.- 400. | .826E 11 | .644E 11 | .372E 11 | .551E 10 | .523E 10 | .479E 10 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .218E 12 | .175E 12 | .112E 12 | .446E 11 | .424E 11 | .388E 11 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .612E 12 | .506E 12 | .528E 11 | .196E 12 | .187E 12 | .267E 11 |
| 801.- 900. | .237E 11 | .199E 11 | .140E 11 | .906E 10 | .863E 10 | .788E 10 |
| 901.-1000. | .171E 11 | .144E 11 | .104E 11 | .705E 10 | .671E 10 | .612E 10 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .110E 13 | .911E 12 | .221E 12 | .263E 12 | .250E 12 | .843E 11 |

SCC = 30500903--CLAY AND FLYNATURAL CLAY -NO CONTROL EQUIPMENT -TOT RECS = 30

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .113E 13 | .934E 12 | .232E 12 | .263E 12 | .250E 12 | .843E 11 |
| 33 | ******** | ******** | ******** | .0 | .0 | .0 |
| | .110E 13 | .911E 12 | .221E 12 | .263E 12 | .250E 12 | .843E 11 |

CC = 30500903--CLAY AND FLY NATURAL CLAY -- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 30

```
TEMP RANGE     COUNT
                         --------------------------------------------------------------------------------------------------------
   0.- 100.   .962E 11  !H
 101.- 200.   .130E 11  !H
 201.- 300.   .218E 11  !H
 301.- 400.   .644E 11  !H
 401.- 500.   .0        !
 501.- 600.   .175E 12  !H
 601.- 700.   .0        !
 701.- 800.   .506E 12  !HHHHH
 801.- 900.   .199E 11  !H
 901.-1000.   .144E 11  !H
1001.-1100.   .0        !
1101.-1200.   .0        !
1201.-1300.   .0        !
1301.-1400.   .0        !
1401.-1500.   .0        !
1501.-1600.   .0        !
1601.-1700.   .0        !
1701.-1800.   .0        !
1801.-1900.   .0        !
1901.-2000.   .0        !
2001.-2100.   .0        !
2101.-2200.   .0        !
2201.-2300.   .0        !
2301.-2400.   .0        !
2401.-2500.   .0        !
2501.-2600.   .0        !
2601.-2700.   .0        !
2701.-2800.   .0        !
2801.-2900.   .0        !
2901.-3000.   .0        !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500903--CLAY AND FLY NATURAL CLAY -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 31

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .143E 12 | .134E 12 | .618E 11 | .0 | .0 | .0 |
| 101.- 200. | .146E 13 | .110E 13 | .541E 12 | .0 | .0 | .0 |
| 201.- 300. | .865E 12 | .649E 12 | .329E 12 | .0 | .0 | .0 |
| 301.- 400. | .660E 12 | .514E 12 | .145E 11 | .476E 11 | .452E 11 | .911E 09 |
| 401.- 500. | .335E 12 | .265E 12 | .835E 11 | .444E 11 | .422E 11 | .226E 11 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .346E 13 | .266E 13 | .103E 13 | .920E 11 | .874E 11 | .235E 11 |

SCC = 30500903--CLAY AND FLYNATURAL CLAY -WITH CONTROL EQUIPMENT -TOT RECS = 31

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 14 | .340E 11 | .311E 11 | .198E 11 | .0 | .0 | .0 |
| 25 | .171E 12 | .136E 12 | .835E 11 | .260E 11 | .247E 11 | .226E 11 |
| 32 | .306E 13 | .234E 13 | .912E 12 | .476E 11 | .452E 11 | .911E 09 |
| 99 | .197E 12 | .155E 12 | .147E 11 | .185E 11 | .175E 11 | .0 |
| | .346E 13 | .266E 13 | .103E 13 | .920E 11 | .874E 11 | .235E 11 |

CC =30500903--CLAY AND FLY NATURAL CLAY ---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 31

```
TEMP RANGE   COUNT
                        ----------------------------------------------------------------------------------------------------
   0.- 100.  .134E 12  !H
 101.- 200.  .110E 13  !HHHHHHHHHHH
 201.- 300.  .649E 12  !HHHHHH
 301.- 400.  .514E 12  !HHHHH
 401.- 500.  .265E 12  !HH
 501.- 600.  .0        !
 601.- 700.  .0        !
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500903--CLAY AND FLY NATURAL CLAY -TOTAL SCC -SIC = 0 -TOT RECS = 61

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .246E 12 | .230E 12 | .618E 11 | .0 | .0 | .0 |
| 101.- 200. | .147E 13 | .111E 13 | .548E 12 | .0 | .0 | .0 |
| 201.- 300. | .893E 12 | .671E 12 | .317E 12 | .0 | .0 | .0 |
| 301.- 400. | .742E 12 | .579E 12 | .517E 11 | .531E 11 | .504E 11 | .570E 10 |
| 401.- 500. | .335E 12 | .265E 12 | .835E 11 | .444E 11 | .422E 11 | .226E 11 |
| 501.- 600. | .218E 12 | .175E 12 | .112E 12 | .446E 11 | .424E 11 | .388E 11 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .612E 12 | .506E 12 | .528E 11 | .196E 12 | .187E 12 | .267E 11 |
| 801.- 900. | .237E 11 | .199E 11 | .140E 11 | .906E 10 | .863E 10 | .788E 10 |
| 901.-1000. | .171E 11 | .144E 11 | .104E 11 | .705E 10 | .671E 10 | .612E 10 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .456E 13 | .357E 13 | .125E 13 | .355E 12 | .337E 12 | .108E 12 |

SCC = 30500903--CLAY AND FLYNATURAL CLAY -TOTAL SCC -TOT RECS = 61

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 14 | .340E 11 | .311E 11 | .198E 11 | .0 | .0 | .0 |
| 25 | .171E 12 | .136E 12 | .835E 11 | .260E 11 | .247E 11 | .226E 11 |
| 32 | .419E 13 | .327E 13 | .114E 13 | .310E 12 | .295E 12 | .852E 11 |
| 33 | ******** | ******** | ******** | .0 | .0 | .0 |
| 99 | .197E 12 | .155E 12 | .147E 11 | .185E 11 | .175E 11 | .0 |
| | .456E 13 | .357E 13 | .125E 13 | .355E 12 | .337E 12 | .108E 12 |

CC 30500903--CLAY AND FLY NATURAL CLAY --TOTAL SCC -SIC = 0 -TOT RECS = 61

```
EMP RANGE    COUNT

                        ----------------------------------------------------------------------------------------------------
   0.- 100.  .230E 12   !HH
 101.- 200.  .111E 13   !HHHHHHHHHHH
 201.- 300.  .671E 12   !HHHHHH
 301.- 400.  .579E 12   !HHHHH
 401.- 500.  .265E 12   !HH
 501.- 600.  .175E 12   !H
 601.- 700.  .0         !
 701.- 800.  .506E 12   !HHHHH
 801.- 900.  .199E 11   !H
 901.-1000.  .144E 11   !H
1001.-1100.  .0         !
1101.-1200.  .0         !
1201.-1300.  .0         !
1301.-1400.  .0         !
1401.-1500.  .0         !
1501.-1600.  .0         !
1601.-1700.  .0         !
1701.-1800.  .0         !
1801.-1900.  .0         !
1901.-2000.  .0         !
2001.-2100.  .0         !
2101.-2200.  .0         !
2201.-2300.  .0         !
2301.-2400.  .0         !
2401.-2500.  .0         !
2501.-2600.  .0         !
2601.-2700.  .0         !
2701.-2800.  .0         !
2801.-2900.  .0         !
2901.-3000.  .0         !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500999--CLAY AND FLY OTHER/NOT CLASSIFIED -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 5

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .572E 09 | .536E 09 | .0 | .0 | .0 | .0 |
| 101.- 200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .144E 11 | .113E 11 | .0 | .176E 10 | .168E 10 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .870E 10 | .706E 10 | .461E 10 | .211E 10 | .201E 10 | .183E 10 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .924E 10 | .774E 10 | .547E 10 | .353E 10 | .336E 10 | .307E 10 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .329E 11 | .267E 11 | .101E 11 | .741E 10 | .704E 10 | .490E 10 |

SCC = 30500999--CLAY AND FLYOTHER/NOT CLASSIFIED -NO CONTROL EQUIPMENT -TOT RECS = 5

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 32 | .329E 11 | .267E 11 | .101E 11 | .741E 10 | .704E 10 | .490E 10 |
| | .329E 11 | .267E 11 | .101E 11 | .741E 10 | .704E 10 | .490E 10 |

CC = 30500999--CLAY AND FLY OTHER/NOT CLASSIFIED-- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 5

```
TEMP RANGE   COUNT
                     ----------------------------------------------------------------------------------------------------
   0.- 100.  .536E 09  !
 101.- 200.  .0        !
 201.- 300.  .0        !
 301.- 400.  .0        !
 401.- 500.  .113E 11  !H
 501.- 600.  .0        !
 601.- 700.  .706E 10  !H
 701.- 800.  .0        !
 801.- 900.  .774E 10  !H
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                     0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500999--CLAY AND FLY OTHER/NOT CLASSIFIED -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 19

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .169E 12 | .159E 12 | .231E 11 | .0 | .0 | .0 |
| 101.- 200. | .448E 12 | .350E 12 | .175E 12 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .875E 11 | .710E 11 | .463E 11 | .212E 11 | .202E 11 | .185E 11 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .705E 12 | .580E 12 | .244E 12 | .212E 11 | .202E 11 | .185E 11 |

SCC = 30500999--CLAY AND FLYOTHER/NOT CLASSIFIED -WITH CONTROL EQUIPMENT -TOT RECS = 19

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 14 | .450E 11 | .422E 11 | .156E 11 | .0 | .0 | .0 |
| 32 | .628E 12 | .509E 12 | .229E 12 | .212E 11 | .202E 11 | .185E 11 |
| 99 | .312E 11 | .293E 11 | .0 | .0 | .0 | .0 |
| | .705E 12 | .580E 12 | .244E 12 | .212E 11 | .202E 11 | .185E 11 |

CC =30500999--CLAY AND FLY OTHER/NOT CLASSIFIED---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 19

```
TEMP RANGE   COUNT
                       ----------------------------------------------------------------------------------------------------
   0.- 100.  .159E 12  !H
 101.- 200.  .350E 12  !HHH
 201.- 300.  .0        !
 301.- 400.  .0        !
 401.- 500.  .0        !
 501.- 600.  .0        !
 601.- 700.  .710E 11  !H
 701.- 800.  .0        !
 801.- 900.  .0        !
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30500999--CLAY AND FLY OTHER/NOT CLASSIFIED -TOTAL SCC -SIC = 0 -TOT RECS = 24

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .170E 12 | .159E 12 | .231E 11 | .0 | .0 | .0 |
| 101.- 200. | .448E 12 | .350E 12 | .175E 12 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .144E 11 | .113E 11 | .0 | .176E 10 | .168E 10 | .0 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .962E 11 | .781E 11 | .509E 11 | .234E 11 | .222E 11 | .203E 11 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .924E 10 | .774E 10 | .547E 10 | .353E 10 | .336E 10 | .307E 10 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .737E 12 | .607E 12 | .254E 12 | .286E 11 | .272E 11 | .234E 11 |

SCC = 30500999--CLAY AND FLYOTHER/NOT CLASSIFIED -TOTAL SCC -TOT RECS = 24

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 14 | .450E 11 | .422E 11 | .156E 11 | .0 | .0 | .0 |
| 32 | .661E 12 | .535E 12 | .239E 12 | .286E 11 | .272E 11 | .234E 11 |
| 99 | .312E 11 | .293E 11 | .0 | .0 | .0 | .0 |
| | .737E 12 | .607E 12 | .254E 12 | .286E 11 | .272E 11 | .234E 11 |

CC 30500999--CLAY AND FLY OTHER/NOT CLASSIFIED--TOTAL SCC -SIC = 0 -TOT RECS = 24

```
EMP RANGE    COUNT
                       ------------------------------------------------------------------------------------------------------
   0.- 100.  .159E 12  !H
 101.- 200.  .350E 12  !HHH
 201.- 300.  .0        !
 301.- 400.  .0        !
 401.- 500.  .113E 11  !H
 501.- 600.  .0        !
 601.- 700.  .781E 11  !H
 701.- 800.  .0        !
 801.- 900.  .774E 10  !H
 901.-1000.  .0        !
1001.-1100.  .0        !
1101.-1200.  .0        !
1201.-1300.  .0        !
1301.-1400.  .0        !
1401.-1500.  .0        !
1501.-1600.  .0        !
1601.-1700.  .0        !
1701.-1800.  .0        !
1801.-1900.  .0        !
1901.-2000.  .0        !
2001.-2100.  .0        !
2101.-2200.  .0        !
2201.-2300.  .0        !
2301.-2400.  .0        !
2401.-2500.  .0        !
2501.-2600.  .0        !
2601.-2700.  .0        !
2701.-2800.  .0        !
2801.-2900.  .0        !
2901.-3000.  .0        !
                       0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30501001--COAL CLEANIN THERMAL AND FLUIDIZE -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 14

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .994E 12 | .932E 12 | .157E 12 | .0 | .0 | .0 |
| 101.- 200. | .450E 12 | .372E 12 | .183E 12 | .0 | .0 | .0 |
| 201.- 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .229E 10 | .181E 10 | .110E 10 | .311E 09 | .296E 09 | .270E 09 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .145E 13 | .131E 13 | .341E 12 | .311E 09 | .296E 09 | .270E 09 |

SCC = 30501001--COAL CLEANINTHERMAL AND FLUIDIZE -NO CONTROL EQUIPMENT -TOT RECS = 14

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 12 | .124E 13 | .111E 13 | .183E 12 | .0 | .0 | .0 |
| 29 | .229E 10 | .181E 10 | .110E 10 | .311E 09 | .296E 09 | .270E 09 |
| 32 | .205E 12 | .192E 12 | .157E 12 | .0 | .0 | .0 |
| | .145E 13 | .131E 13 | .341E 12 | .311E 09 | .296E 09 | .270E 09 |

CC = 30501001--COAL CLEANIN THERMAL AND FLUIDIZE-- -NO CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 14

```
TEMP RANGE   COUNT

                         ------------------------------------------------------------------------------------------------------
   0.- 100.  .932E 12   !HHHHHHHHH
 101.- 200.  .372E 12   !HHH
 201.- 300.  .0         !
 301.- 400.  .0         !
 401.- 500.  .181E 10   !H
 501.- 600.  .0         !
 601.- 700.  .0         !
 701.- 800.  .0         !
 801.- 900.  .0         !
 901.-1000.  .0         !
1001.-1100.  .0         !
1101.-1200.  .0         !
1201.-1300.  .0         !
1301.-1400.  .0         !
1401.-1500.  .0         !
1501.-1600.  .0         !
1601.-1700.  .0         !
1701.-1800.  .0         !
1801.-1900.  .0         !
1901.-2000.  .0         !
2001.-2100.  .0         !
2101.-2200.  .0         !
2201.-2300.  .0         !
2301.-2400.  .0         !
2401.-2500.  .0         !
2501.-2600.  .0         !
2601.-2700.  .0         !
2701.-2800.  .0         !
2801.-2900.  .0         !
2901.-3000.  .0         !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30501001--COAL CLEANIN THERMAL AND FLUIDIZE -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 54

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .222E 12 | .209E 12 | .124E 12 | .0 | .0 | .0 |
| 101.- 200. | .944E 13 | .782E 13 | .315E 13 | .0 | .0 | .0 |
| 201.- 300. | .248E 11 | .190E 11 | .104E 11 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .193E 12 | .153E 12 | .941E 11 | .293E 11 | .278E 11 | .254E 11 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .988E 13 | .820E 13 | .338E 13 | .293E 11 | .278E 11 | .254E 11 |

SCC = 30501001--COAL CLEANINTHERMAL AND FLUIDIZE -WITH CONTROL EQUIPMENT -TOT RECS = 54

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 12 | .889E 13 | .745E 13 | .337E 13 | .293E 11 | .278E 11 | .254E 11 |
| 29 | .248E 11 | .190E 11 | .104E 11 | .0 | .0 | .0 |
| 32 | .322E 12 | .242E 12 | .0 | .0 | .0 | .0 |
| 33 | .104E 10 | .974E 09 | .521E 09 | .0 | .0 | .0 |
| 99 | .641E 12 | .482E 12 | .0 | .0 | .0 | .0 |
| | .988E 13 | .820E 13 | .338E 13 | .293E 11 | .278E 11 | .254E 11 |

CC =30501001--COAL CLEANIN THERMAL AND FLUIDIZE---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 54

```
TEMP RANGE    COUNT

                      ----------------------------------------------------------------------------------------------------
   0.- 100.  .209E 12 !HH
 101.- 200.  .782E 13 !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
 201.- 300.  .190E 11 !H
 301.- 400.  .0       !
 401.- 500.  .153E 12 !H
 501.- 600.  .0       !
 601.- 700.  .0       !
 701.- 800.  .0       !
 801.- 900.  .0       !
 901.-1000.  .0       !
1001.-1100.  .0       !
1101.-1200.  .0       !
1201.-1300.  .0       !
1301.-1400.  .0       !
1401.-1500.  .0       !
1501.-1600.  .0       !
1601.-1700.  .0       !
1701.-1800.  .0       !
1801.-1900.  .0       !
1901.-2000.  .0       !
2001.-2100.  .0       !
2101.-2200.  .0       !
2201.-2300.  .0       !
2301.-2400.  .0       !
2401.-2500.  .0       !
2501.-2600.  .0       !
2601.-2700.  .0       !
2701.-2800.  .0       !
2801.-2900.  .0       !
2901.-3000.  .0       !
                      0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30501001--COAL CLEANIN THERMAL AND FLUIDIZE -TOTAL SCC -SIC = 0 -TOT RECS = 68

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.- 100. | .122E 13 | .114E 13 | .280E 12 | .0 | .0 | .0 |
| 101.- 200. | .989E 13 | .819E 13 | .334E 13 | .0 | .0 | .0 |
| 201.- 300. | .248E 11 | .190E 11 | .104E 11 | .0 | .0 | .0 |
| 301.- 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.- 500. | .195E 12 | .155E 12 | .952E 11 | .296E 11 | .281E 11 | .257E 11 |
| 501.- 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.- 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.- 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.- 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.-1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.-1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.-1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.-1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.-1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.-1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.-1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.-1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.-1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.-1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.-2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.-2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.-2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.-2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.-2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.-2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.-2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.-2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.-2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.-2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.-3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .113E 14 | .951E 13 | .372E 13 | .296E 11 | .281E 11 | .257E 11 |

SCC = 30501001--COAL CLEANINTHERMAL AND FLUIDIZE -TOTAL SCC -TOT RECS = 68

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 12 | .101E 14 | .857E 13 | .355E 13 | .293E 11 | .278E 11 | .254E 11 |
| 29 | .271E 11 | .208E 11 | .115E 11 | .311E 09 | .296E 09 | .270E 09 |
| 32 | .527E 12 | .434E 12 | .157E 12 | .0 | .0 | .0 |
| 33 | .104E 10 | .974E 09 | .521E 09 | .0 | .0 | .0 |
| 99 | .641E 12 | .482E 12 | .0 | .0 | .0 | .0 |
| | .113E 14 | .951E 13 | .372E 13 | .296E 11 | .281E 11 | .257E 11 |

CC 30501001--COAL CLEANIN THERMAL AND FLUIDIZE--TOTAL SCC -SIC = 0 -TOT RECS = 68

```
EMP RANGE     COUNT
                        ----------------------------------------------------------------------------------------------------
    0.- 100.  .114E 13  !HHHHHHHHHHH
  101.- 200.  .819E 13  !HHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHHH
  201.- 300.  .190E 11  !H
  301.- 400.  .0        !
  401.- 500.  .155E 12  !H
  501.- 600.  .0        !
  601.- 700.  .0        !
  701.- 800.  .0        !
  801.- 900.  .0        !
  901.-1000.  .0        !
 1001.-1100.  .0        !
 1101.-1200.  .0        !
 1201.-1300.  .0        !
 1301.-1400.  .0        !
 1401.-1500.  .0        !
 1501.-1600.  .0        !
 1601.-1700.  .0        !
 1701.-1800.  .0        !
 1801.-1900.  .0        !
 1901.-2000.  .0        !
 2001.-2100.  .0        !
 2101.-2200.  .0        !
 2201.-2300.  .0        !
 2301.-2400.  .0        !
 2401.-2500.  .0        !
 2501.-2600.  .0        !
 2601.-2700.  .0        !
 2701.-2800.  .0        !
 2801.-2900.  .0        !
 2901.-3000.  .0        !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30501002--COAL CLEANIN THERMAL AND FLASH -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 2

| | | | | | | |
|---|---|---|---|---|---|---|
| TEMP | MAXIMUM | EXPECTED | MINIMUM | MAXIMUM | EXPECTED | MINIMUM |
| | 60 DEG | 60 DEG | 60 DEG | 300 DEG | 300 DEG | 300 DEG |

0 RECORDS FOR THIS SECTION OF SCC

SCC = 30501002--COAL CLEANINTHERMAL AND FLASH -NO CONTROL EQUIPMENT -TOT RECS = 2

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|

SCC= 30501002--COAL CLEANIN THERMAL AND FLASH -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 15

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.= 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.= 200. | .159E 13 | .119E 13 | .542E 12 | .0 | .0 | .0 |
| 201.= 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.= 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.= 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.= 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.= 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.= 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.= 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.=1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.=1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.=1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.=1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.=1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.=1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.=1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.=1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.=1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.=1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.=2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.=2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.=2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.=2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.=2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.=2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.=2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.=2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.=2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.=2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.=3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .159E 13 | .119E 13 | .542E 12 | .0 | .0 | .0 |

SCC = 30501002--COAL CLEANINTHERMAL AND FLASH -WITH CONTROL EQUIPMENT -TOT RECS = 15

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 12 | .145E 13 | .109E 13 | .491E 12 | .0 | .0 | .0 |
| 32 | .138E 12 | .104E 12 | .509E 11 | .0 | .0 | .0 |
| | .159E 13 | .119E 13 | .542E 12 | .0 | .0 | .0 |

CC =30501002--COAL CLEANIN THERMAL AND FLASH ---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 15

```
TEMP RANGE    COUNT
                        ---------------------------------------------------------------------------------------------------
    0.= 100.   .0       !
  101.= 200.   .119E 13 !HHHHHHHHHHH
  201.= 300.   .0       !
  301.= 400.   .0       !
  401.= 500.   .0       !
  501.= 600.   .0       !
  601.= 700.   .0       !
  701.= 800.   .0       !
  801.= 900.   .0       !
  901.=1000.   .0       !
 1001.=1100.   .0       !
 1101.=1200.   .0       !
 1201.=1300.   .0       !
 1301.=1400.   .0       !
 1401.=1500.   .0       !
 1501.=1600.   .0       !
 1601.=1700.   .0       !
 1701.=1800.   .0       !
 1801.=1900.   .0       !
 1901.=2000.   .0       !
 2001.=2100.   .0       !
 2101.=2200.   .0       !
 2201.=2300.   .0       !
 2301.=2400.   .0       !
 2401.=2500.   .0       !
 2501.=2600.   .0       !
 2601.=2700.   .0       !
 2701.=2800.   .0       !
 2801.=2900.   .0       !
 2901.=3000.   .0       !
                        0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100
```

SCC= 30501003--COAL CLEANIN THERMAL AND MULTILOU -NO CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 0

| TEMP | MAXIMUM | EXPECTED | MINIMUM | MAXIMUM | EXPECTED | MINIMUM |
|---|---|---|---|---|---|---|
| | 60 DEG | 60 DEG | 60 DEG | 300 DEG | 300 DEG | 300 DEG |

0 RECORDS FOR THIS SECTION OF SCC

SCC = 30501003--COAL CLEANINTHERMAL AND MULTILOU -NO CONTROL EQUIPMENT -TOT RECS = 0

| SCC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|

SCC= 30501003--COAL CLEANIN THERMAL AND MULTILOU -WITH CONTROL EQUIPMENT -SIC = 0 -TOT RECS = 6

| TEMP | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300 DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 0.= 100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 101.= 200. | .305E 12 | .230E 12 | .113E 12 | .0 | .0 | .0 |
| 201.= 300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 301.= 400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 401.= 500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 501.= 600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 601.= 700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 701.= 800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 801.= 900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 901.=1000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1001.=1100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1101.=1200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1201.=1300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1301.=1400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1401.=1500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1501.=1600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1601.=1700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1701.=1800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1801.=1900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 1901.=2000. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2001.=2100. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2101.=2200. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2201.=2300. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2301.=2400. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2401.=2500. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2501.=2600. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2601.=2700. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2701.=2800. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2801.=2900. | .0 | .0 | .0 | .0 | .0 | .0 |
| 2901.=3000. | .0 | .0 | .0 | .0 | .0 | .0 |
| | .305E 12 | .230E 12 | .113E 12 | .0 | .0 | .0 |

SCC = 30501003--COAL CLEANINTHERMAL AND MULTILOU -WITH CONTROL EQUIPMENT -TOT RECS = 6

| SIC | MAXIMUM 60 DEG | EXPECTED 60 DEG | MINIMUM 60 DEG | MAXIMUM 300DEG | EXPECTED 300 DEG | MINIMUM 300 DEG |
|---|---|---|---|---|---|---|
| 12 | .291E 12 | .220E 12 | .108E 12 | .0 | .0 | .0 |
| 32 | .139E 11 | .105E 11 | .515E 10 | .0 | .0 | .0 |
| | .305E 12 | .230E 12 | .113E 12 | .0 | .0 | .0 |

CC =30501003--COAL CLEANIN THERMAL AND MULTILOU---WITH CONTROL EQUIPMENT -SIC= 0 -TOTAL RECS = 6

| TEMP RANGE | COUNT | |
|---|---|---|
| 0.= 100. | .0 | |
| 101.= 200. | .230E 12 | HH |
| 201.= 300. | .0 | |
| 301.= 400. | .0 | |
| 401.= 500. | .0 | |
| 501.= 600. | .0 | |
| 601.= 700. | .0 | |
| 701.= 800. | .0 | |
| 801.= 900. | .0 | |
| 901.=1000. | .0 | |
| 1001.=1100. | .0 | |
| 1101.=1200. | .0 | |
| 1201.=1300. | .0 | |
| 1301.=1400. | .0 | |
| 1401.=1500. | .0 | |
| 1501.=1600. | .0 | |
| 1601.=1700. | .0 | |
| 1701.=1800. | .0 | |
| 1801.=1900. | .0 | |
| 1901.=2000. | .0 | |
| 2001.=2100. | .0 | |
| 2101.=2200. | .0 | |
| 2201.=2300. | .0 | |
| 2301.=2400. | .0 | |
| 2401.=2500. | .0 | |
| 2501.=2600. | .0 | |
| 2601.=2700. | .0 | |
| 2701.=2800. | .0 | |
| 2801.=2900. | .0 | |
| 2901.=3000. | .0 | |

0--------10--------20--------30--------40--------50--------60--------70--------80--------90-------100